


NOTE: ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.

SUPERSTRUCTURE						CALCULATED	RB	DATE
MARK	NO.	LENGTH	TYPE	A	B	C	D	E
S13M01	285	960	5	600	185			
S16M01	784	12 000	STR.					
S16M02	57	5885	STR.					
S16M03	1140	5665	3					
S16M04	1140	#	6	1050				
S16M05	1140	7930	STR.					
S16M06	570	1330	4	460	300	85		
S16M07	1425	1750	1	575	185	390	185	575
S16M08	41	2885	STR.					
S16M09	285	965	1	575	185	150	185	0
S16M10	1140	1785	2	975	230	540		
S19M01	96	12 000	STR.					
S19M02	12	6285	STR.					
S19M03	120	10 610	STR.					
S19M04	80	2790	STR.					
B16M01	144	12 000	STR.					
B16M02	18	6885	STR.					
B16M03	570	2200	4	960	160	180		

* INCLUDE WITH ITEM 517 - RAILING, CONCRETE PARAPET WITH CHAIN LINK FENCE, AS PER PLAN

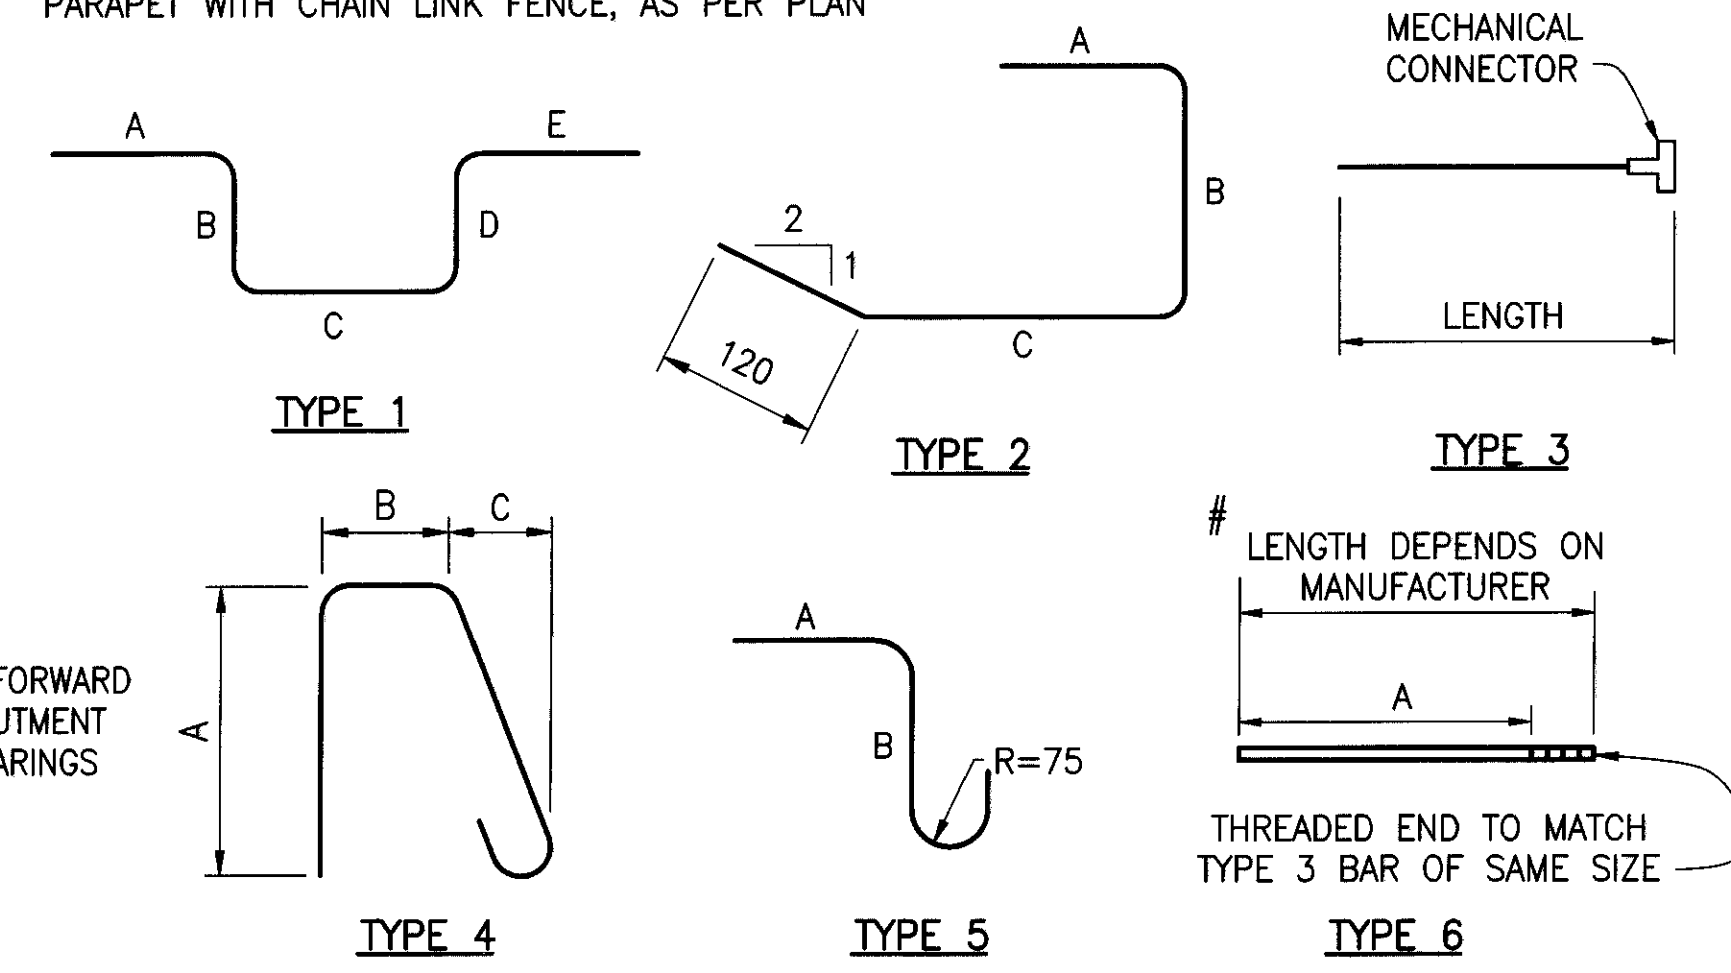

BAR SIZE IS INDICATED IN THE BAR MARK. THE FIRST LETTER IDENTIFIES THE BAR LOCATION; NEXT TWO DIGITS AND LETTER INDICATES THE METRIC BAR SIZE DESIGNATION; AND THE REMAINING DIGITS ITS SEQUENCE NUMBER.

EXAMPLE: A16M01
A = LOCATION OF THE BAR IN STRUCTURE (ABUTMENT)
16M = METRIC BAR SIZE DESIGNATION
01 = SEQUENCE NUMBER

BAR DIMENSIONS SHOWN ARE OUT TO OUT UNLESS OTHERWISE INDICATED
ALL REINFORCING STEEL TO BE EPOXY COATED.



NOTES

SCREENED ELEVATIONS: SEE SHEET 13/18.

TRANSVERSE SECTION: SEE SHEET 13/18.

REINFORCING SPLICE LENGTHS SHALL BE 600 mm FOR 13M BARS, 975 mm FOR 16M BARS AND 1025 mm FOR 19M BARS IN THE DECK. SPLICE LENGTHS IN THE CONCRETE BARRIER SHALL BE 1100 mm FOR B16M BARS.

MECHANICAL CONNECTOR: SEE SHEET 17/18.

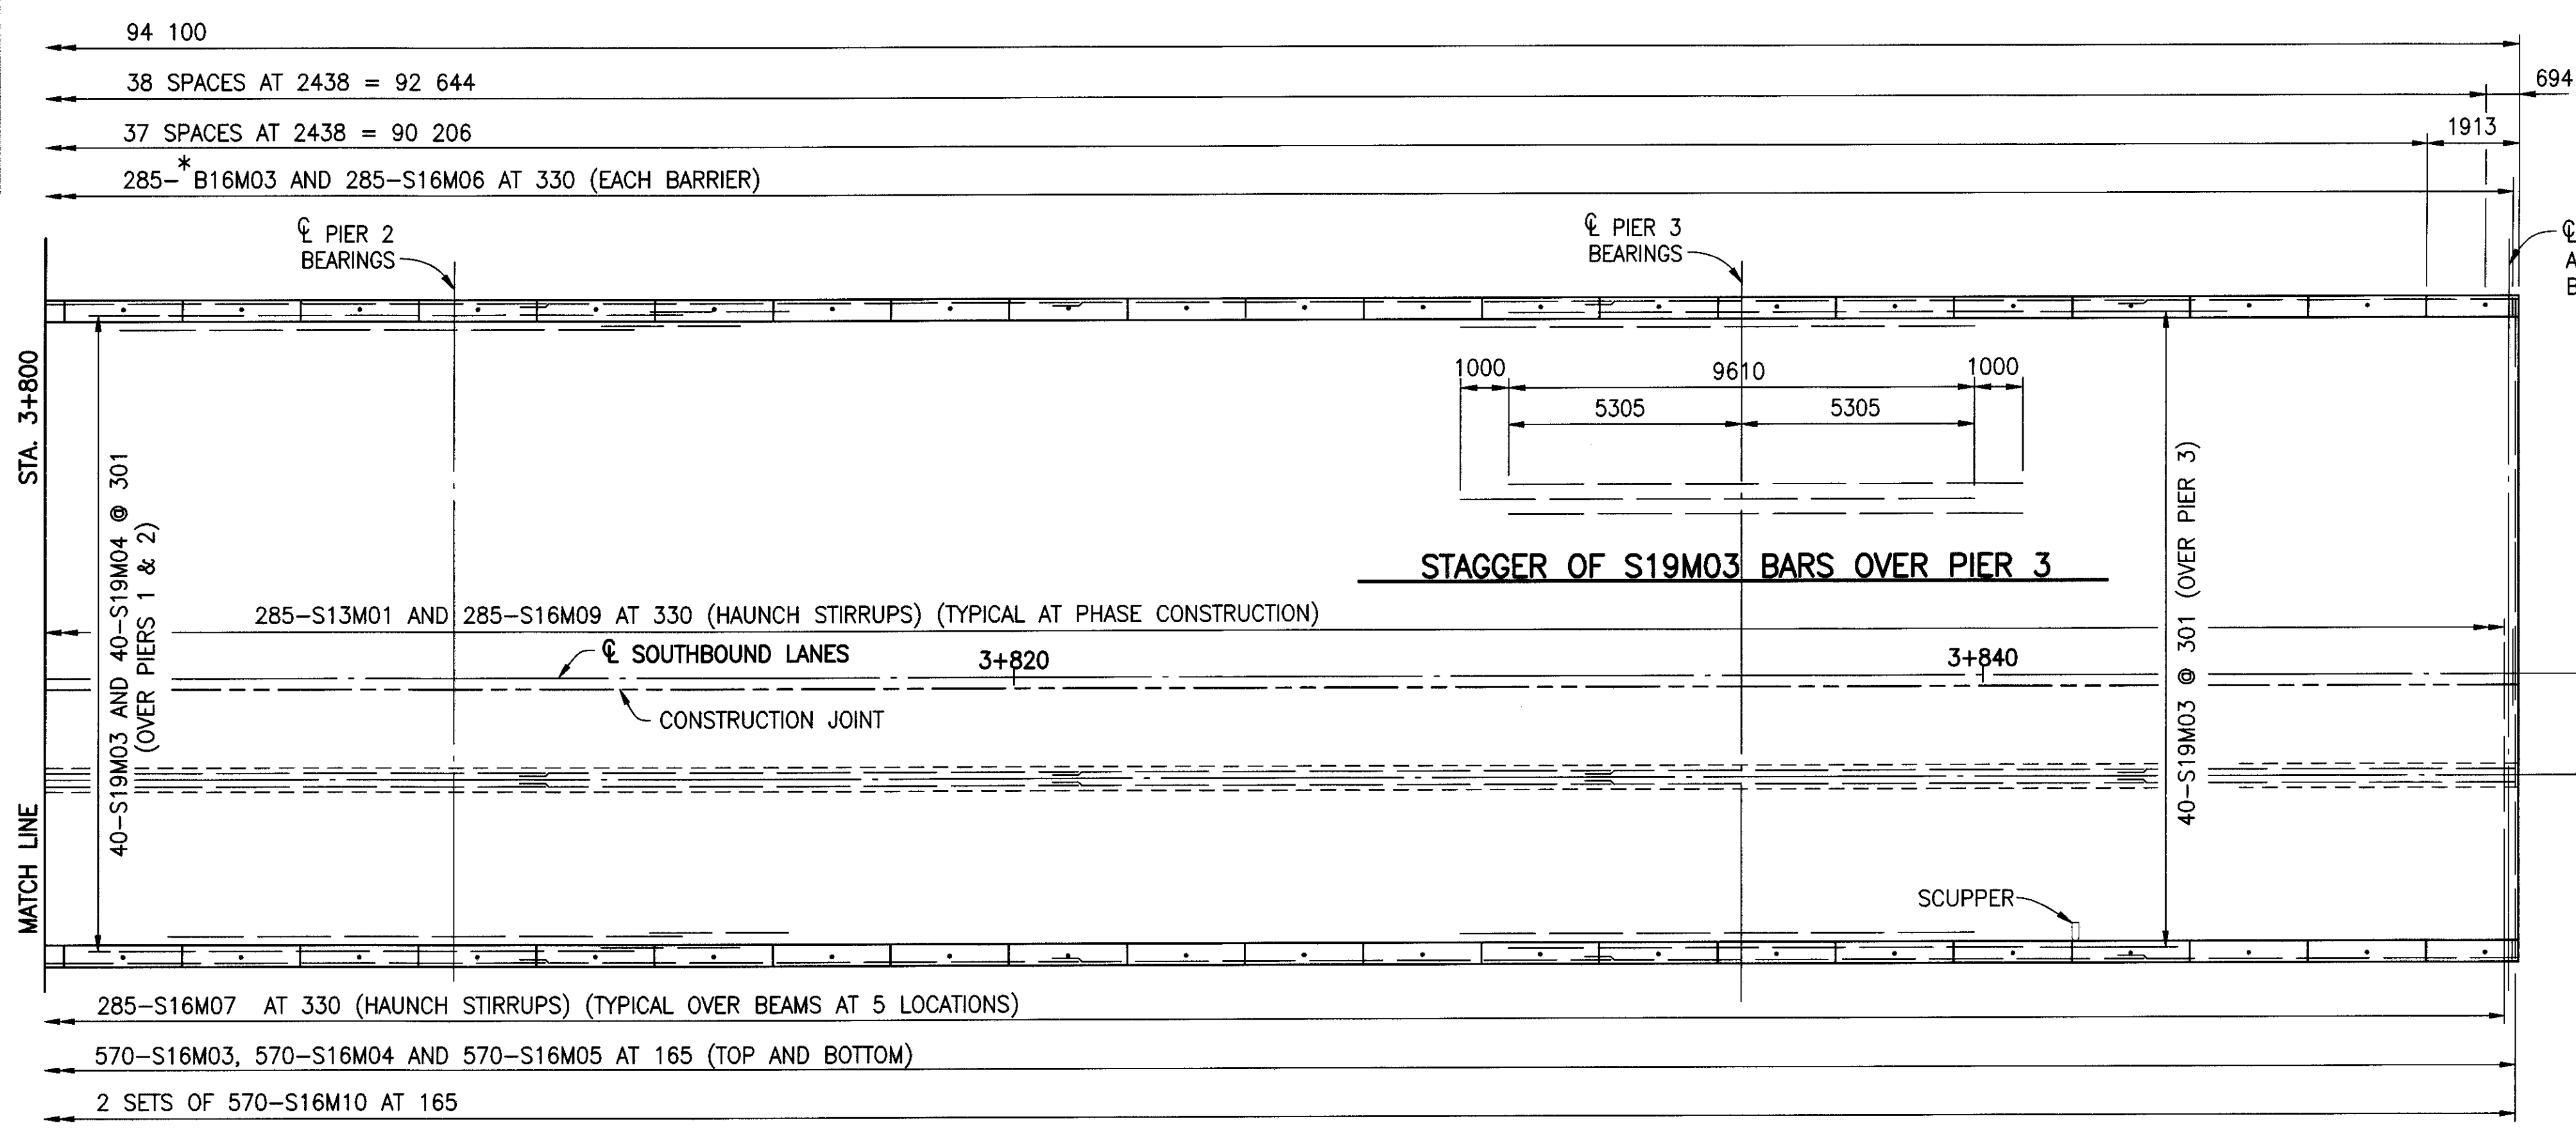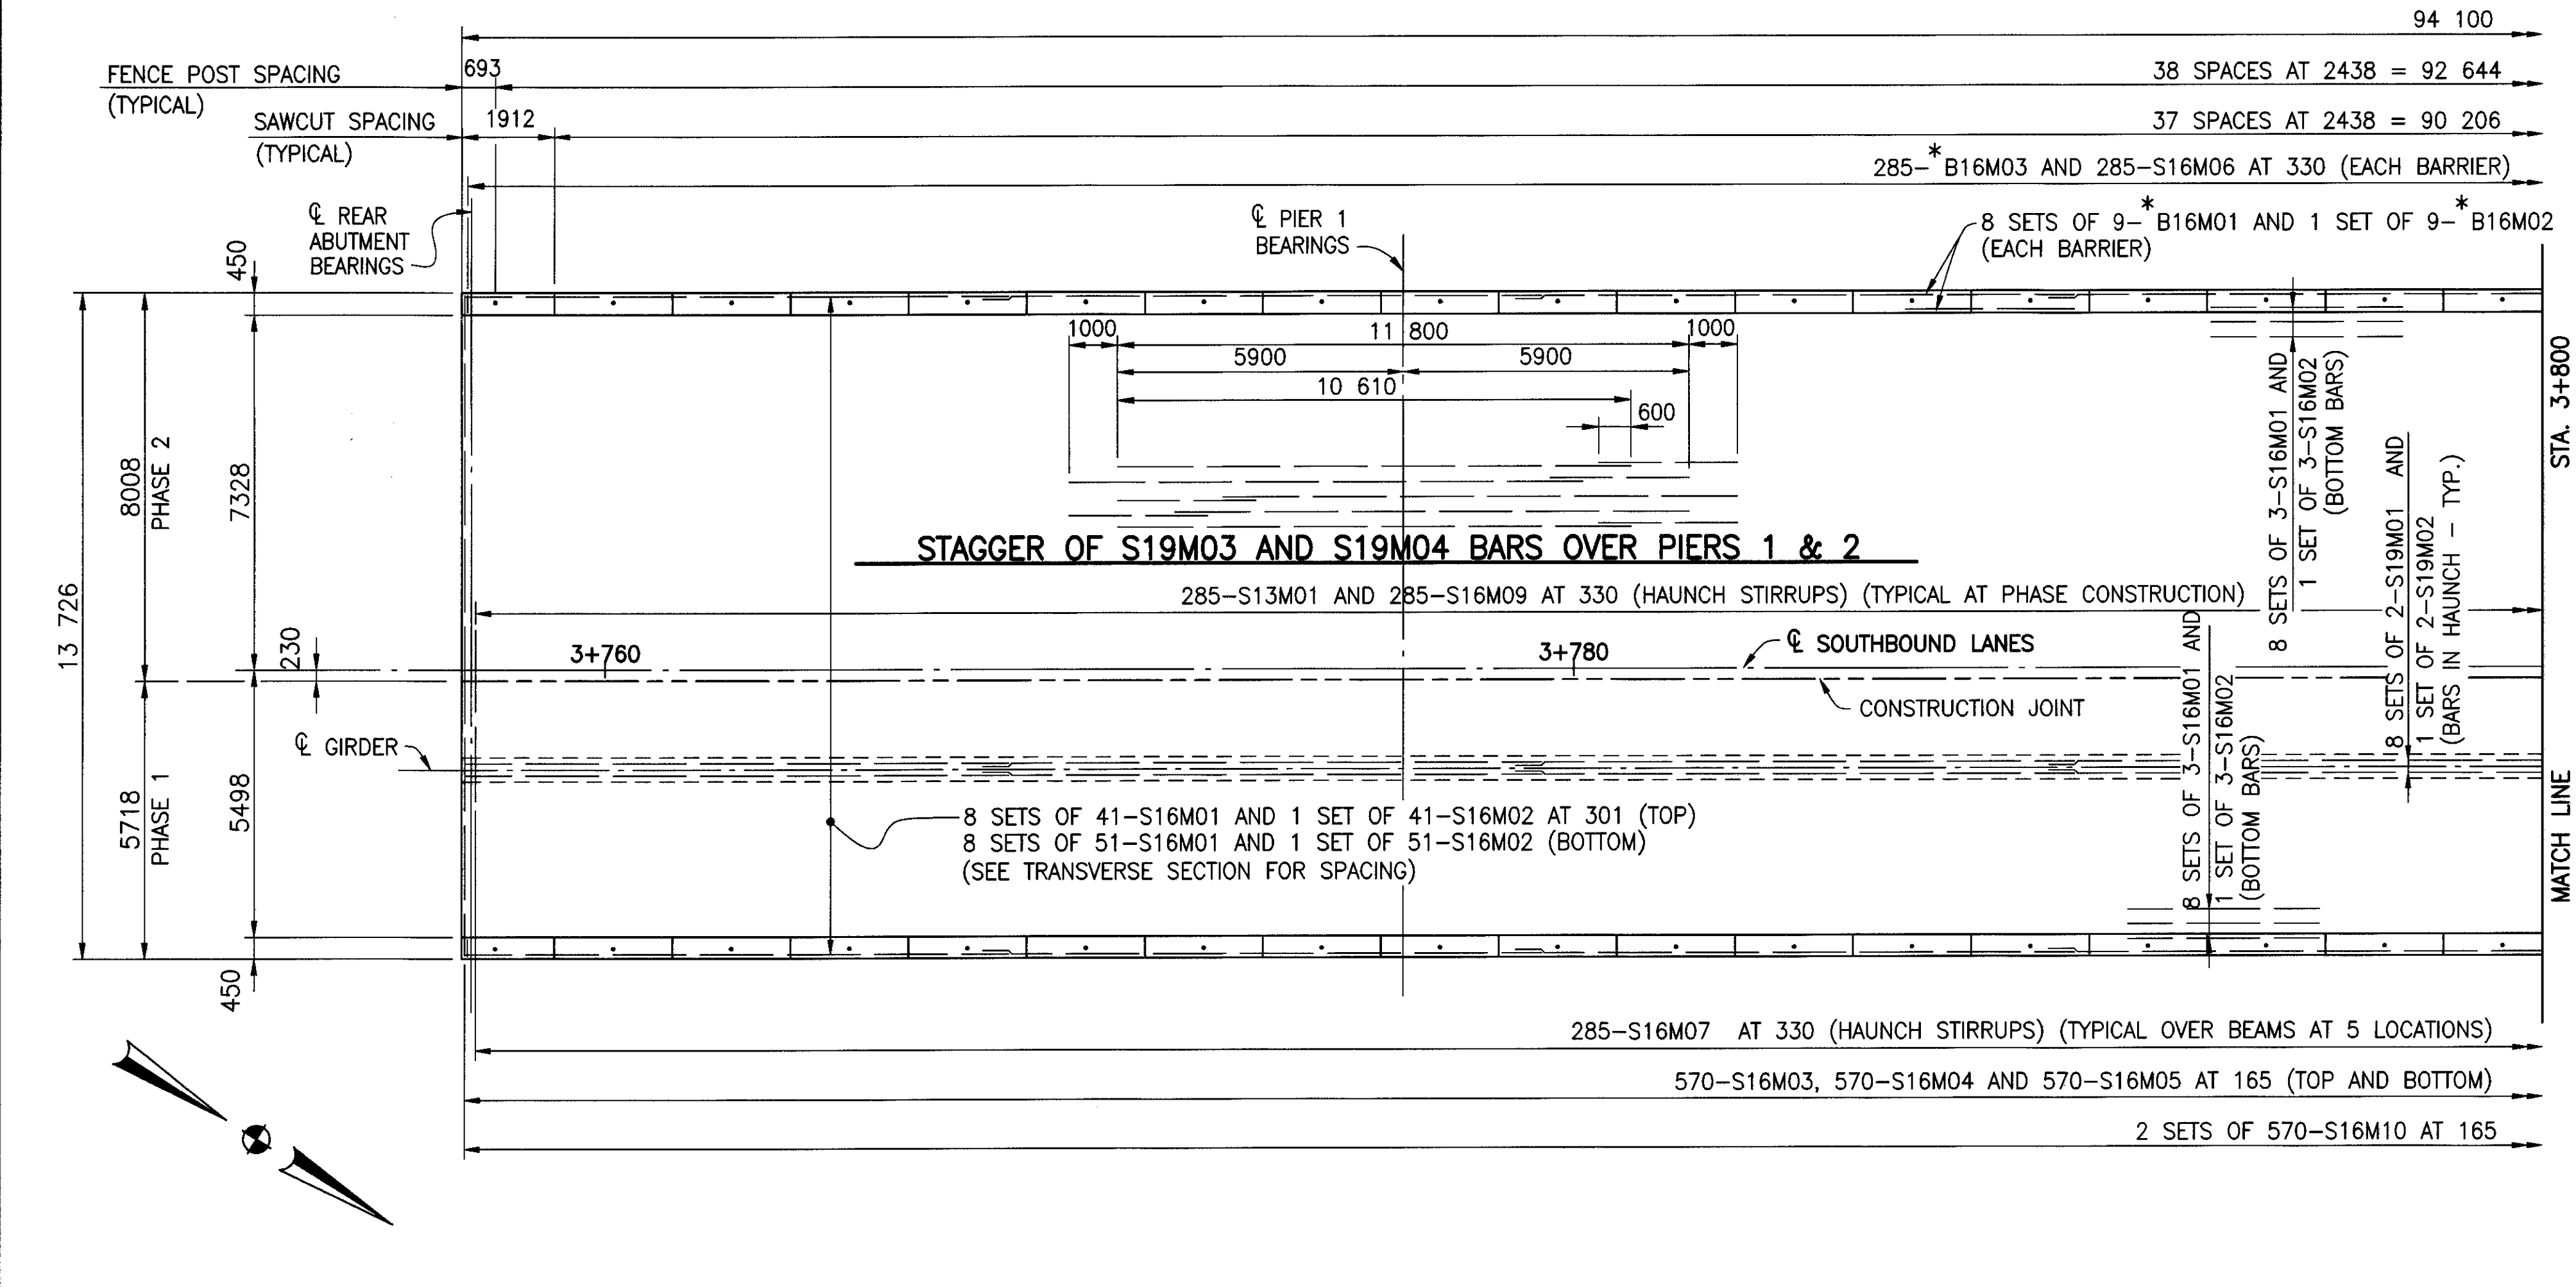

9616SSP.DWG
JOB NO. 96161 DATE 8/23/99 DRAWN BY RB,KAK,TWH

SLAB PLAN (SOUTHBOUND BRIDGE)
BRIDGE NO. LAK-90-23609/23641
S.R. 44 OVER I-90

LAK-90-23.609/23.641