



CLOSURE OF U.S. ROUTE 20 EASTBOUND LANE,
CHAPEL LANE AND BOWHALL ROAD

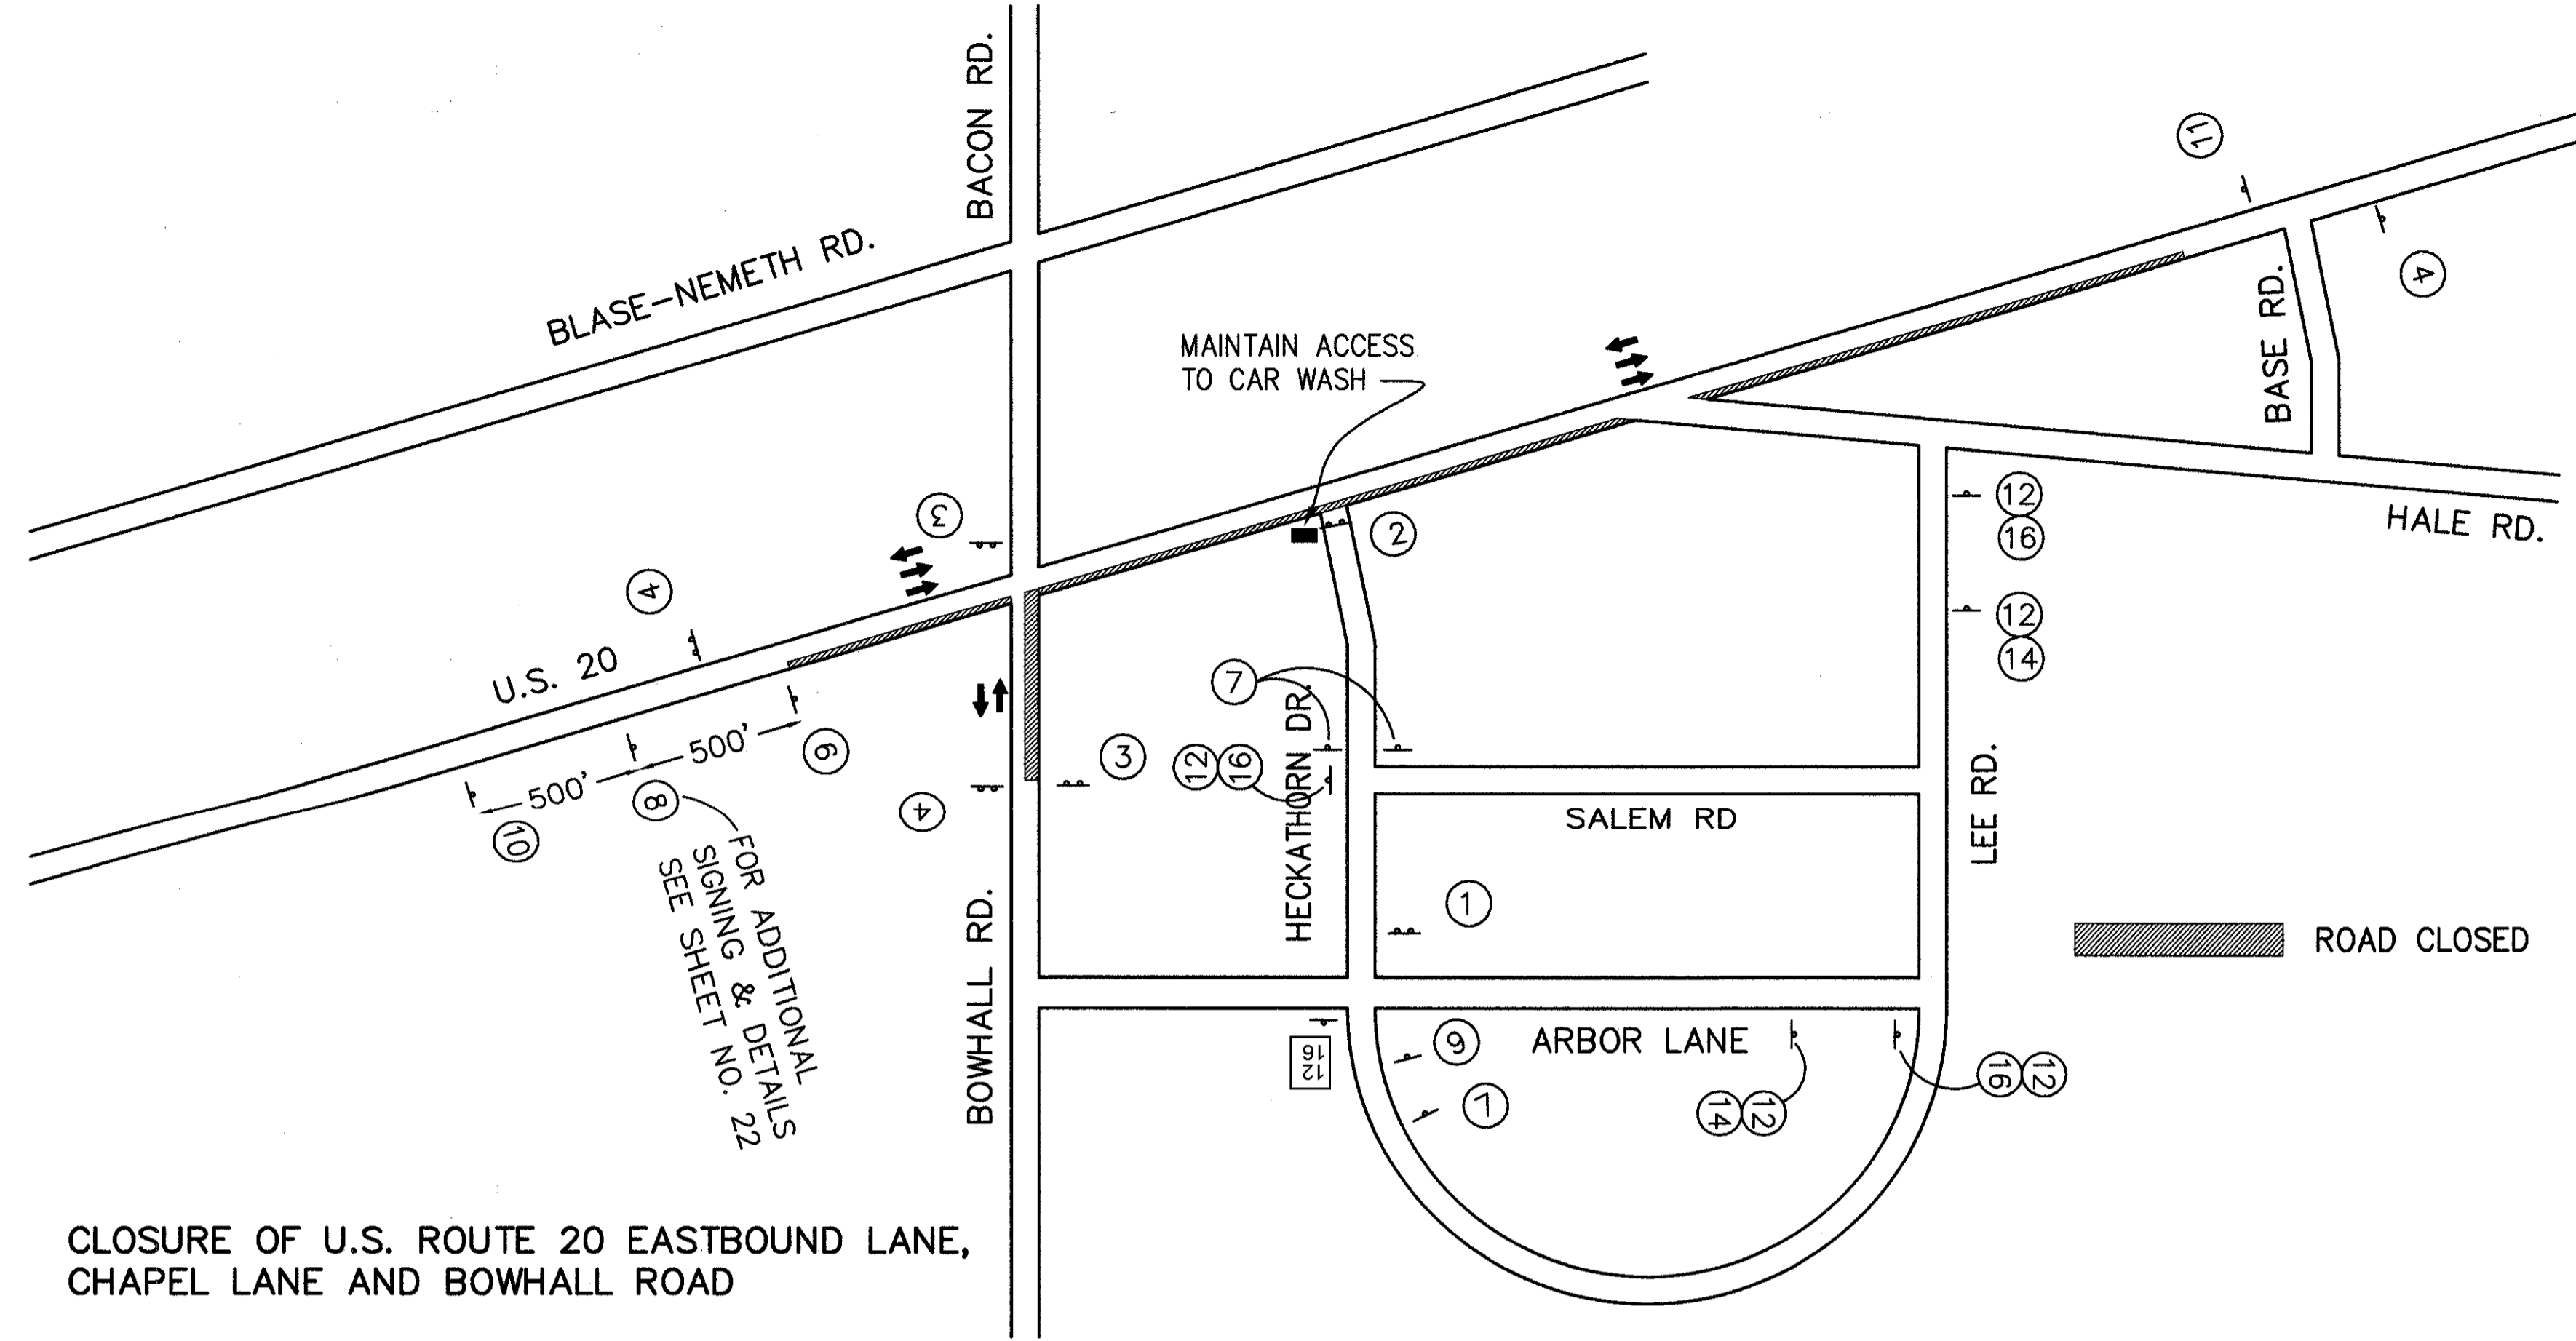

CLOSURE OF U.S. ROUTE 20 EASTBOUND LANE
HECKATHORN DRIVE AND LEE ROAD

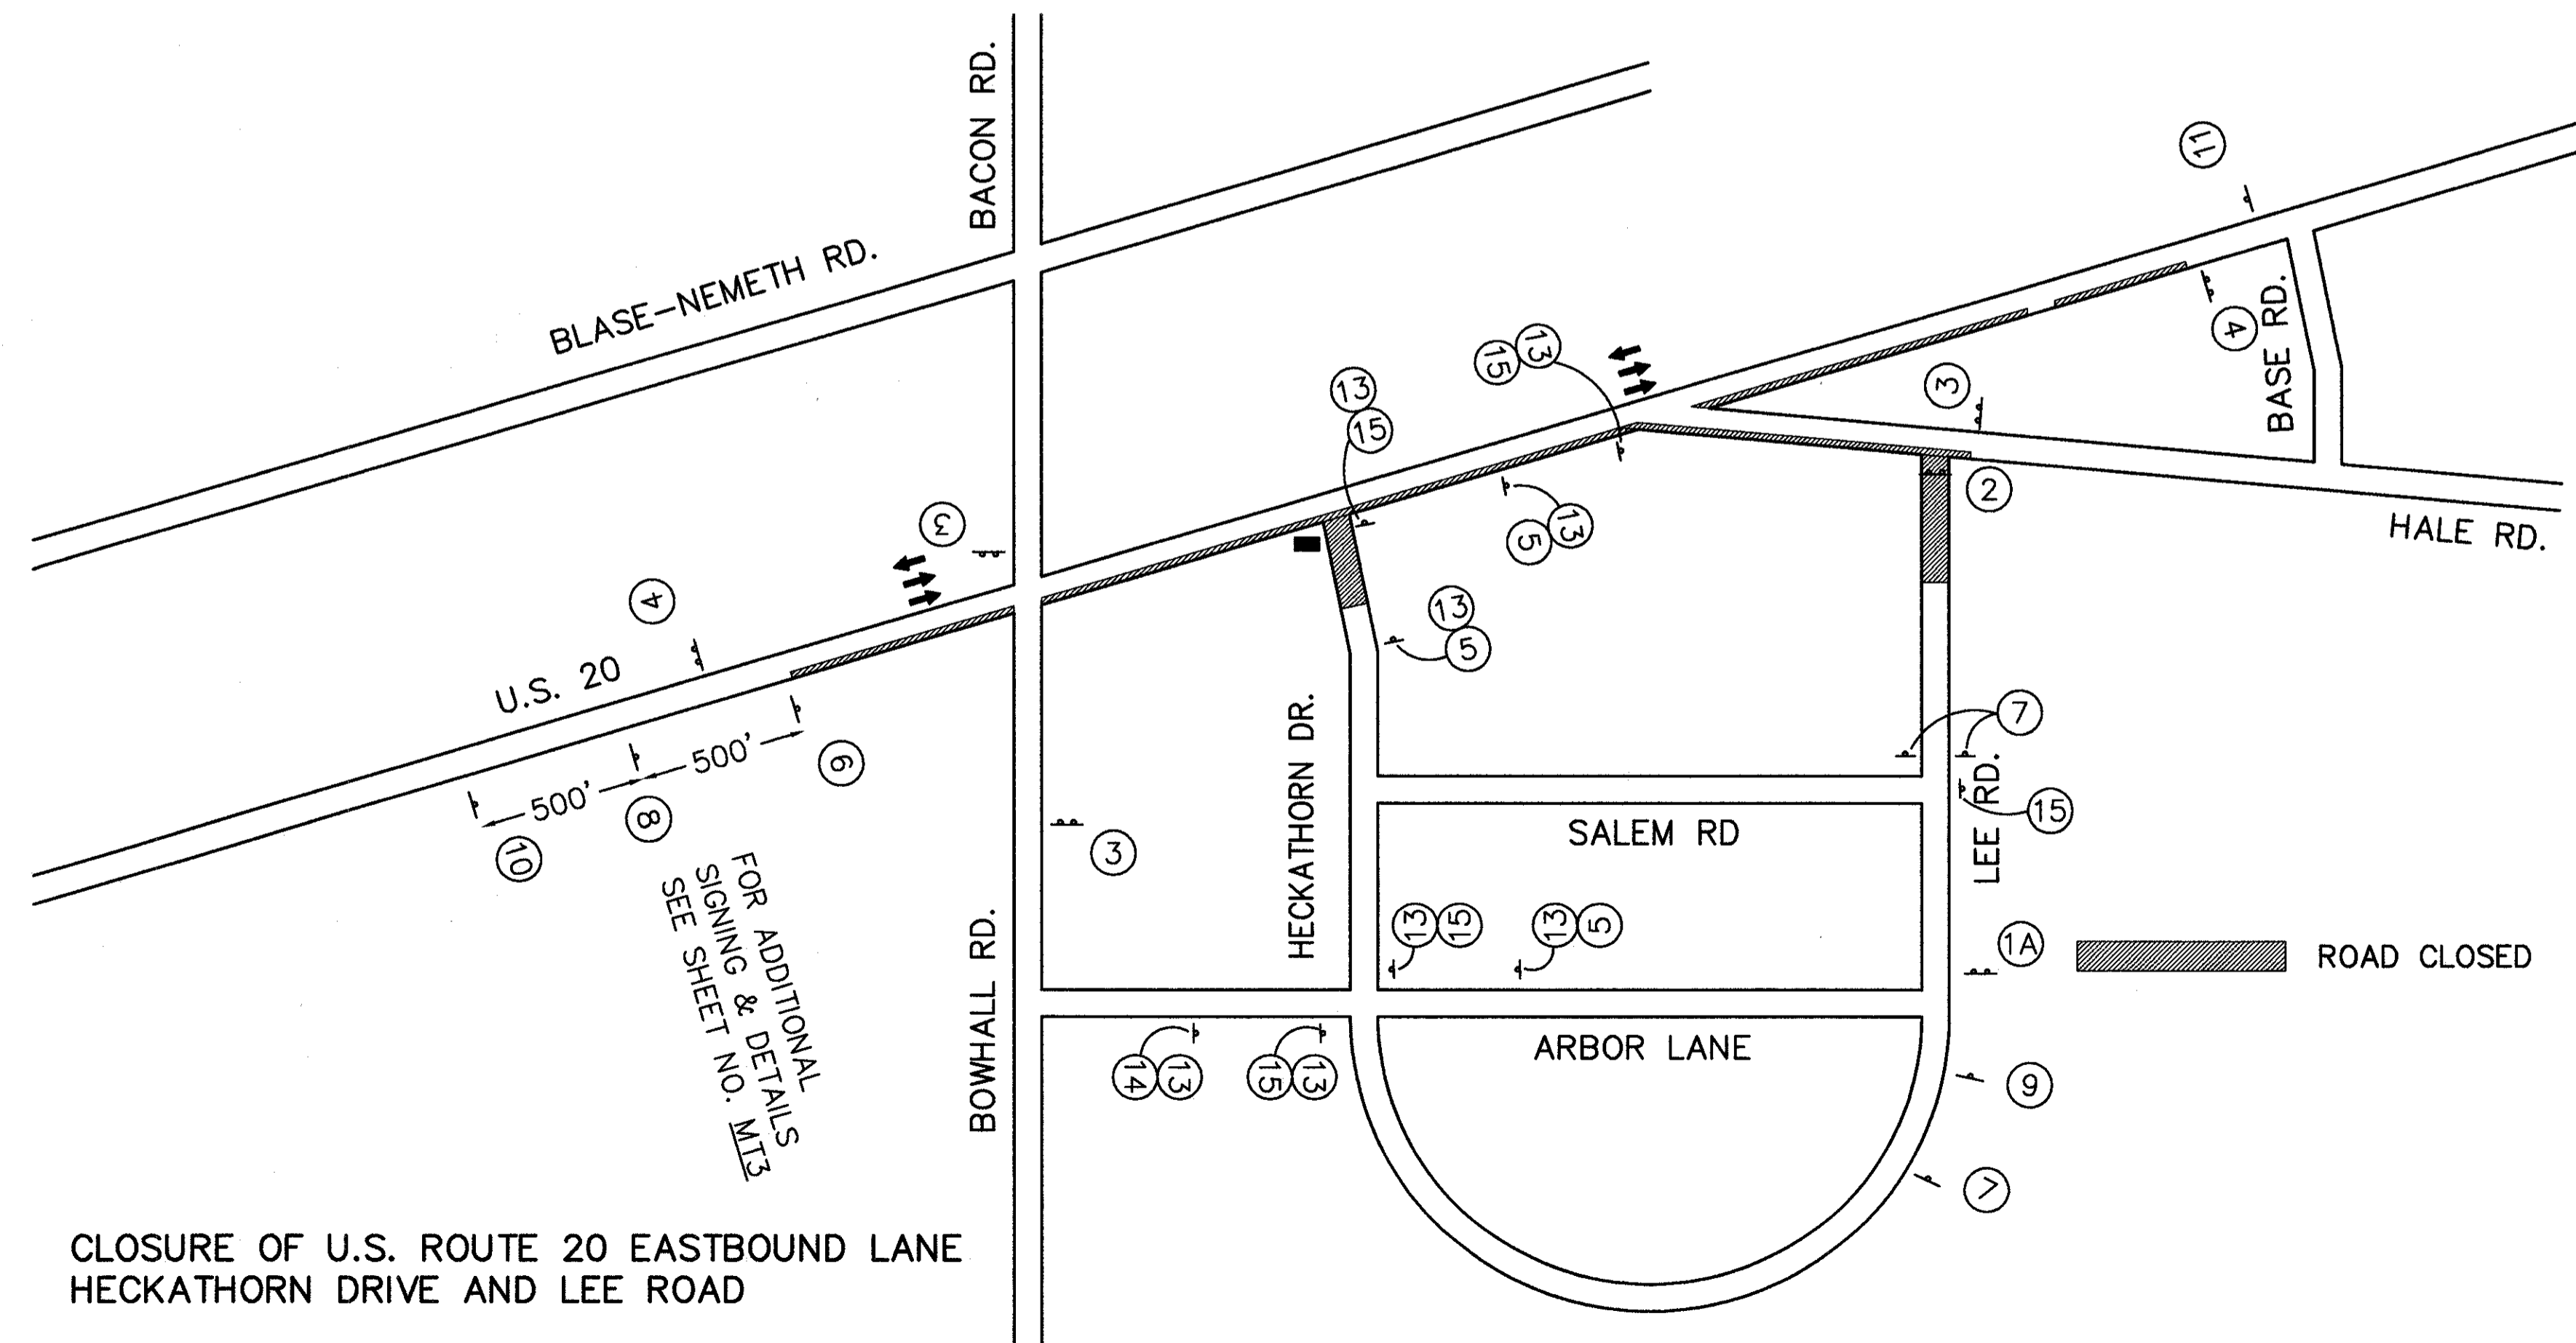


SIGN LEGEND

<p>① TYPE III BARRICADE R-76C & OC-14R 60x30 TYPE G ROAD CLOSED TO THRU TRAFFIC DETOUR</p>	<p>⑥ OW-60R 36x36</p>	<p>⑫ HECKATHORN RD D-14</p>
<p>①A TYPE III BARRICADE R-76C & OC-14L 60x30 TYPE G ROAD CLOSED TO THRU TRAFFIC DETOUR</p>	<p>⑦ ROAD CLOSED AHEAD OW-120 36x36</p>	<p>⑬ LEE RD D-14</p>
<p>② TYPE III BARRICADE R-75 48x30 TYPE G ROAD CLOSED</p>	<p>⑧ RIGHT LANE CLOSED AHEAD OW-122 36x36</p>	<p>⑭ DETOUR OC-29LT 30x24</p>
<p>③ ROAD CONSTRUCTION TRAFFIC MAINTAINED OC-4 48x30</p>	<p>⑨ DETOUR AHEAD OW-127 36x36</p>	<p>⑮ DETOUR OC-29R-30</p>
<p>④ END CONSTRUCTION OC-8 60x24</p>	<p>⑩ ROAD CONSTRUCTION AHEAD OW-128 36x36</p>	<p>⑯ DETOUR OC-29L-30</p>
<p>⑤ DETOUR</p>	<p>⑪ ROAD WORK AHEAD OW-134 30x30</p>	

NOTE:

WHEN HECKATHORN DRIVE, LEE ROAD AND CENTER ROAD SOUTH OF US 20 ARE CONSTRUCTED THE CONTRACTOR SHALL BE ALLOWED TO CLOSE THE ROAD INVOLVED UTILIZING THE DETOUR ROUTES INDICATED, FOR A PERIOD NOT TO EXCEED 30 CONSECUTIVE CALENDAR DAYS. LIQUIDATED DAMAGES SHALL BE ASSESSED IN THE AMOUNT OF \$1000.00 PER DAY FOR EACH CALENDAR DAY THE ROADWAY REMAINS CLOSED TO TRAFFIC BEYOND THE SPECIFIED LIMITS. THE CONTRACTOR WILL NOT BE PERMITTED TO CLOSE HECKATHORN DRIVE AND LEE ROAD AT THE SAME TIME.



NOT TO SCALE

CALCULATED
CHECKED

MAINTENANCE OF TRAFFIC
PART A - BACON/BOWHALL/HALE

LAK - 20 - 18.72