


ESTIMATED QUANTITIES		877	
LOCATION	SIDE	TEMPORARY PERIMETER FILTER FABRIC FENCE	TEMPORARY INLET PROTECTION FILTER FABRIC FENCE
		LIN.FT.	LIN.FT.
AT ALL INLETS & CATCH BASINS	LT & RT		275
AT ALL MANHOLES	LT & RT		180
STA. 82+00 TO STA. 95+50	LT	1350	
STA. 94+50 TO STA. 95+50	RT	100	
TOTALS		1450	455



QUANTITIES CARRIED TO GENERAL SUMMARY

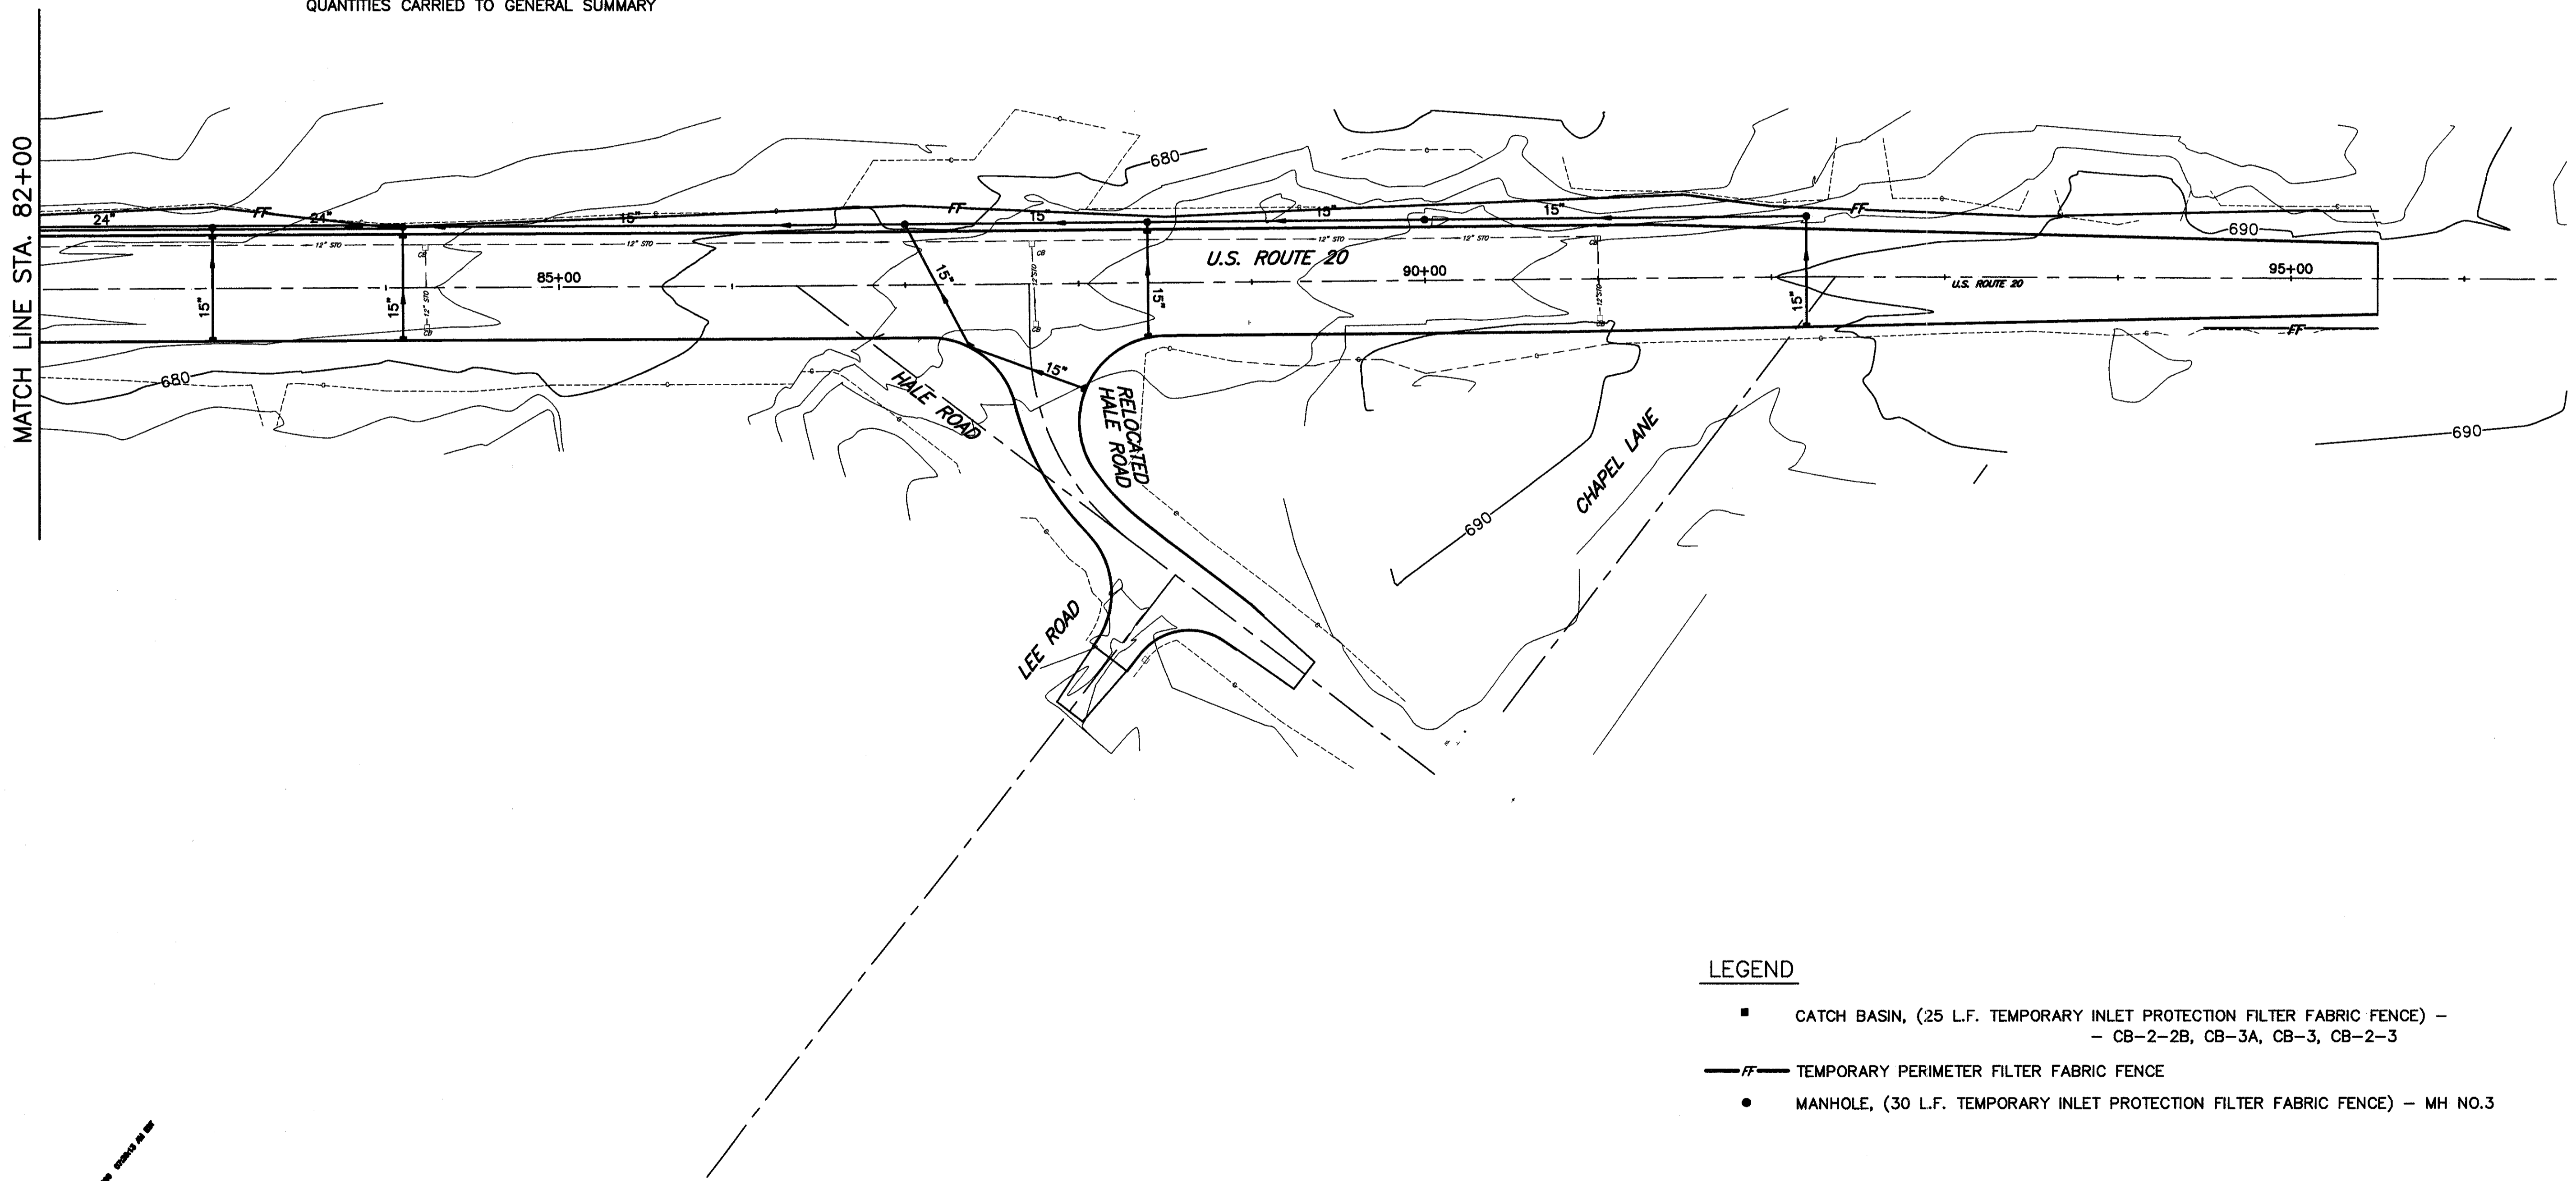

LEGEND

- CATCH BASIN, (25 L.F. TEMPORARY INLET PROTECTION FILTER FABRIC FENCE) - CB-2-2B, CB-3A, CB-3, CB-2-3
- FF— TEMPORARY PERIMETER FILTER FABRIC FENCE
- MANHOLE, (30 L.F. TEMPORARY INLET PROTECTION FILTER FABRIC FENCE) - MH NO.3

H:\1998\98404\DWG\SWPPI1.DWG

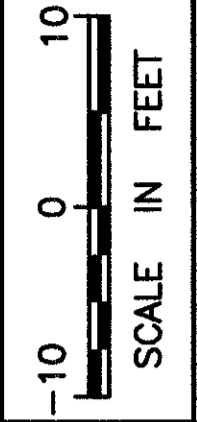

CALCULATED A.E.D. CHECKED

STORM WATER POLLUTION PREVENTION PLAN
STA. 82+00 TO STA. 96+00

LAK - 20 - 18.72