


EXISTING TYPICAL W.B. IR-90
STA. 173+50 TO STA. 178+00

EXISTING LEGEND

- (A) 10" CONCRETE (452)
- (B) SUBBASE
- (C) 4 3/4" ASPHALT CONCRETE
- (D) 12" AGGREGATE
- (E) 9" ASPHALT CONCRETE
- (F) 6" SHALLOW PIPE UNDERDRAIN (605)
- (G) GUARDRAIL, TYPE 5 (606)

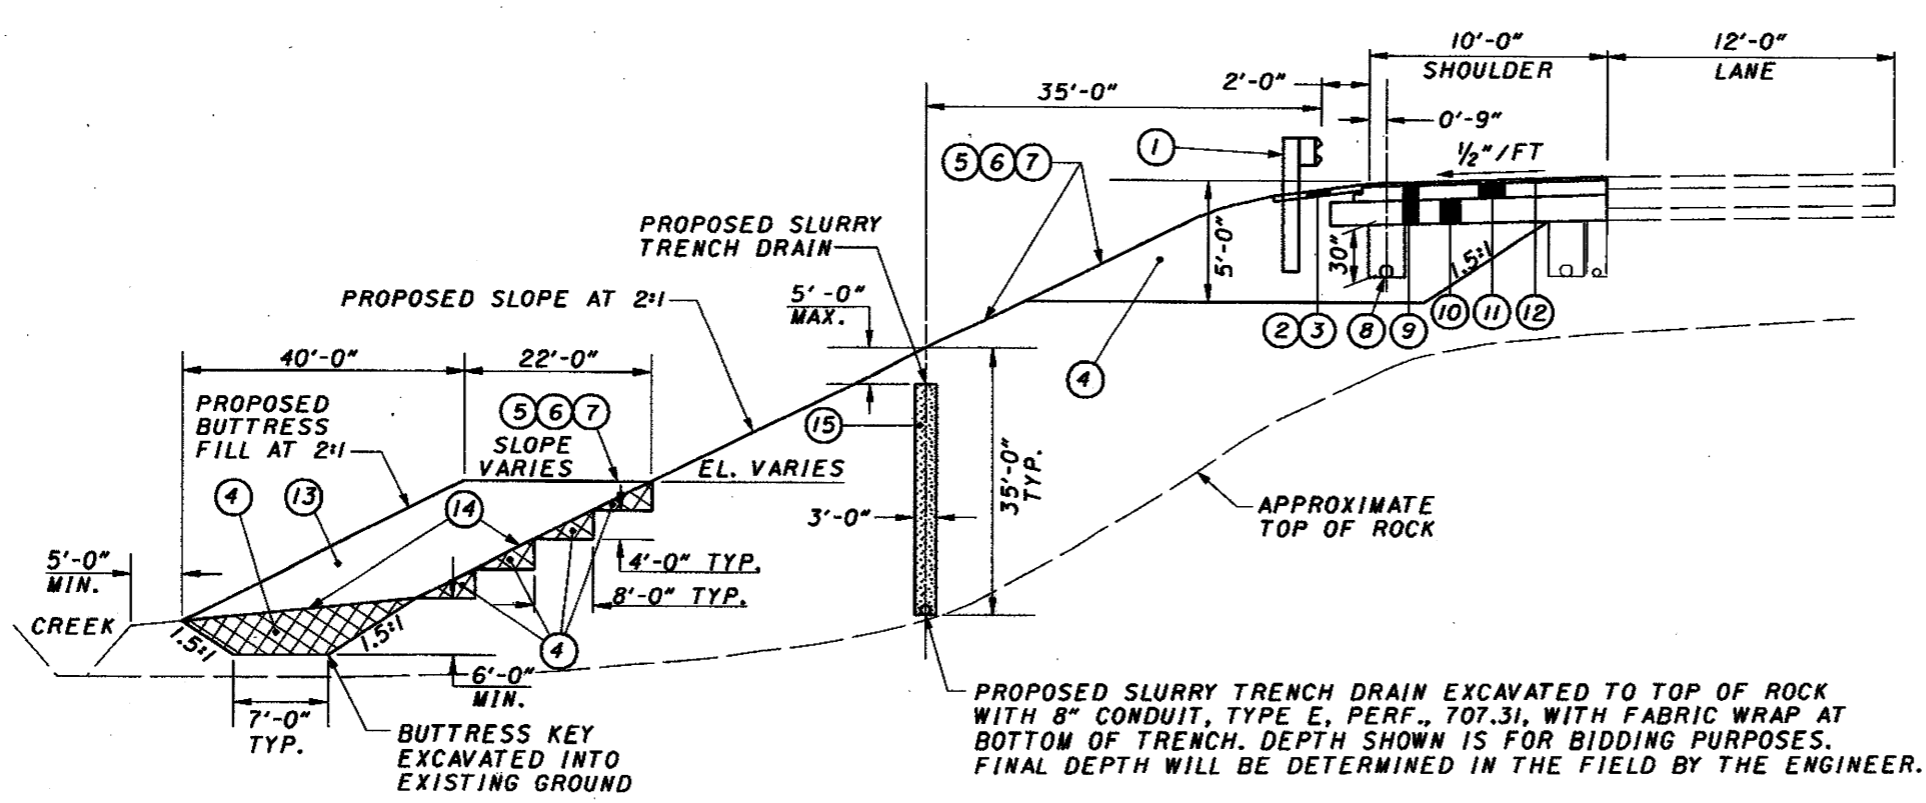

PROPOSED TYPICAL W.B. IR-90
STA. 173+50 TO STA. 178+00

PROPOSED LEGEND

- (1) 606 - GUARDRAIL, TYPE 5
- (2) 203 - LINEAR GRADING
- (3) 448 - 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I, PG64-22 (UNDER GUARDRAIL)
- (4) 203 - EXCAVATION INCLUDING EMBANKMENT CONSTRUCTION
- (5) 670 - SLOPE EROSION PROTECTION
- (6) 870 - COMMERCIAL FERTILIZER
- (7) 870 - WATER
- (8) 605 - 6" SHALLOW PIPE UNDERDRAIN
- (9) 203 - EXCAVATION NOT INCLUDING EMBANKMENT CONSTRUCTION
- (10) 304 - 12" AGGREGATE BASE, AS PER PLAN
- (11) 301 - 7 1/2" BITUMINOUS AGGREGATE BASE, PG64-22
- (12) 448 - 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE I, PG64-28
- (13) 203 - EMBANKMENT
- (14) 201 - CLEARING AND GRUBBING
- (15) 203 - EXCAVATION NOT INCLUDING EMBANKMENT CONSTRUCTION, AS PER PLAN

NO ADDITIONAL PAYMENT WILL BE MADE IF THE CONTRACTOR CHOOSES TO EXCAVATE A SLURRY TRENCH DRAIN WIDER THAN 3'-0".
SEE SHEET 17 THRU 19 FOR BORING LOGS.
SEE SHEET 14 FOR SHOULDER REPAIR DETAILS.
SEE SHEET 12 FOR PLAN.

22623gys.dgn