


TYPICAL SECTIONS

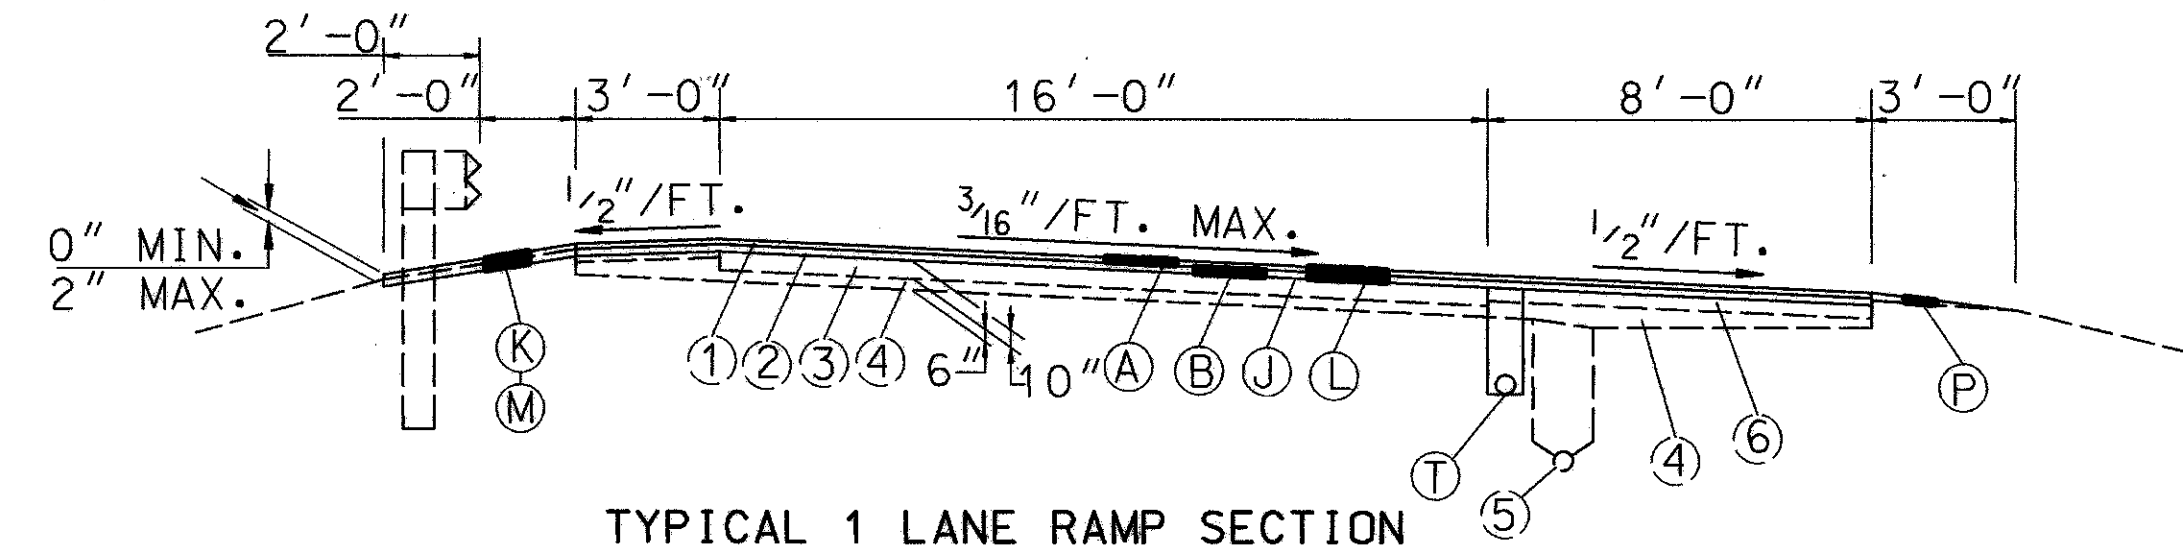

TYPICAL 1 LANE RAMP SECTION


RAMP "L" STA. 5+45.58 TO STA. 18+97.23	RAMP "N" STA. 6+12.41 TO STA. 9+50	RAMP "Q" STA. 3+96 TO STA. 12+28.39	RAMP "S" STA. 0+00 TO STA. 11+27.51
RAMP "M" STA. 8+37.55 TO STA. 16+18.23	RAMP "P" STA. 9+36.70 TO STA. 23+15.16	RAMP "R" STA. 0+00 TO STA. 10+61.95	RAMP "T" (REST AREA) STA. 0+00 TO STA. 5+46.28

EXISTING

- ① 1 1/4" ASPHALT CONCRETE SURFACE COURSE
- ② 3" +/- ASPHALT CONCRETE PAVEMENT
- ③ 10" PORTLAND CEMENT CONCRETE PAVEMENT
- ④ 6" SUBBASE
- ⑤ UNDERDRAIN
- ⑥ STABILIZED AGGREGATE
- ⑦ WATERPROOFED AGGREGATE BASE COURSE


PROPOSED

- (A) ITEM - 446 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, AC-20, AS PER PLAN
- (B) ITEM - 446 4" ASPHALT CONCRETE INTERMEDIATE COURSE, AC-20, TYPE 2
- (C) ITEM - 305 12" CONCRETE BASE, AS PER PLAN
- (D) ITEM - 304 6" AGGREGATE BASE, GRADE "A" (SEE NOTE IN PROPOSAL)
- (E) ITEM - 605 6" SHALLOW OR DEEP PIPE UNDERDRAIN
- (F) ITEM - 203 EMBANKMENT, AS PER PLAN
- (G) ITEM - 203 EXCAVATION, NOT INCLUDING EMBANKMENT CONSTRUCTION
- (H) ITEM - 203 SUBGRADE COMPACTION
- (J) ITEM - 407 TACK COAT
- (K) ITEM - 203 LINEAR GRADING
- (L) ITEM - 202 WEARING COURSE REMOVED (THICKNESS 4" +/-)
- (M) ITEM - 448 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1 (UNDER GUARDRAIL), AS PER PLAN
- (P) ITEM - 617 COMPACTED AGGREGATED, TYPE A
- (Q) ITEM - 659 SEEDING AND MULCHING
- (R) ITEM - 606 GUARDRAIL, TYPE 5
- (S) ITEM - 451 14" REINFORCED CONCRETE PAVEMENT
- (T) ITEM - 605 4" SHALLOW UNDERDRAIN, AS PER PLAN

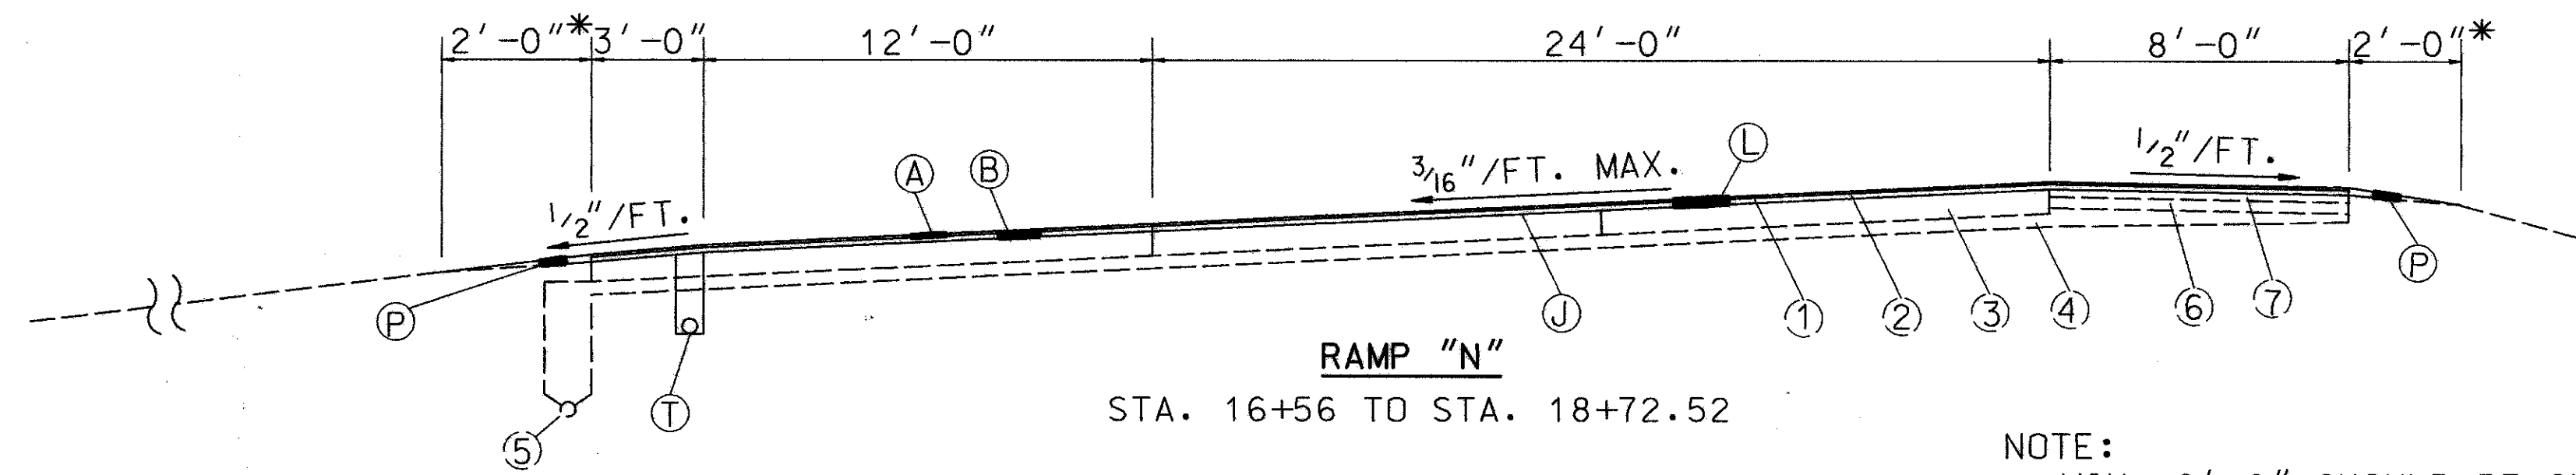

RAMP "N"
STA. 16+56 TO STA. 18+72.52

NOTE:
* MIN. 2'-0" SHOULD BE ONE FOOT WIDTH FOR EACH 1" DIFF. OF VERTICAL DIFFERENCE.

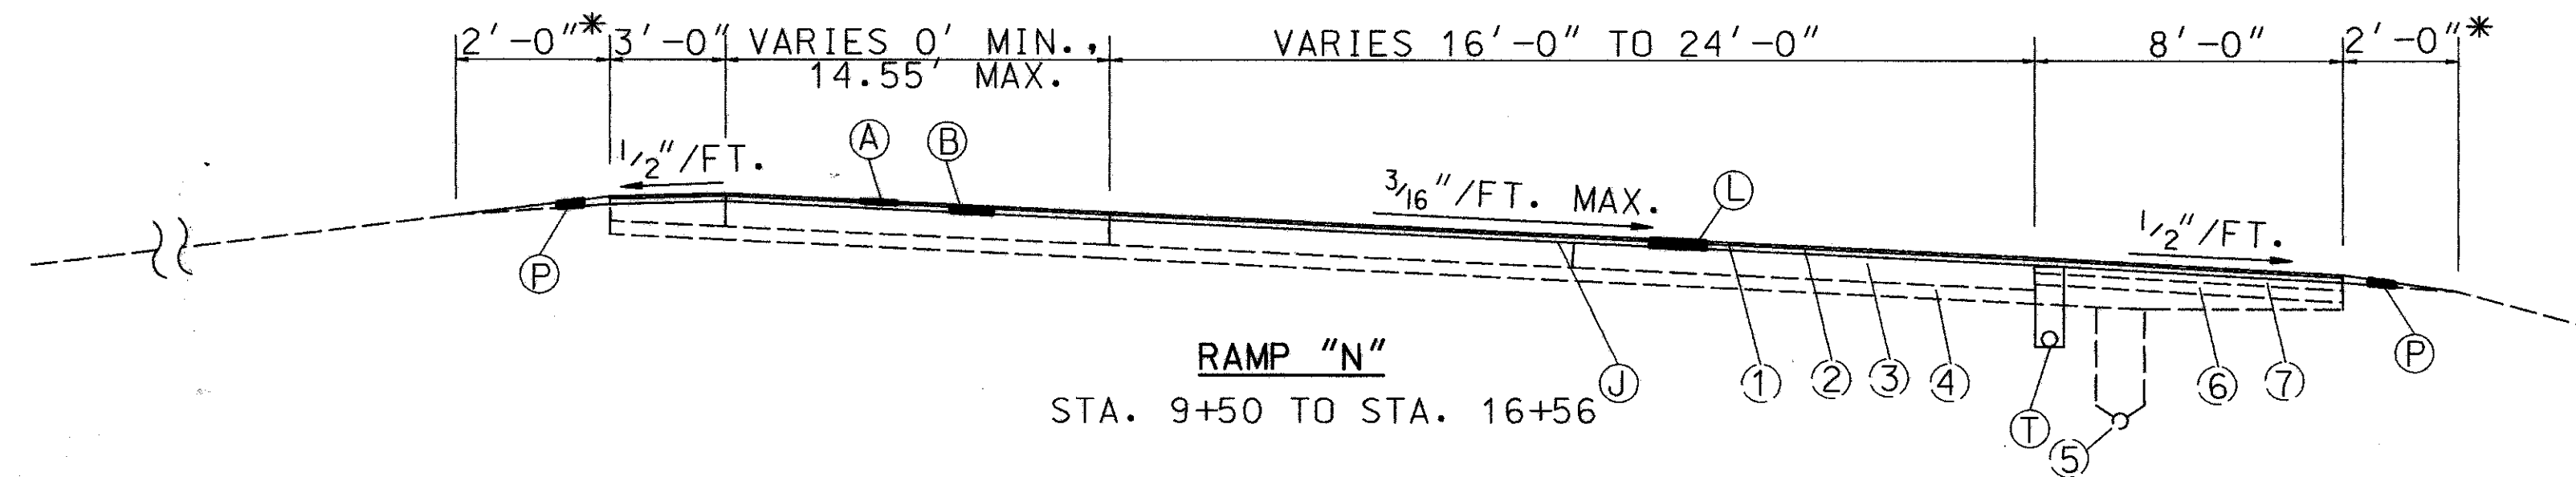

RAMP "N"
STA. 9+50 TO STA. 16+56