


CALC BY \_\_\_\_\_  
 DATE \_\_\_\_\_  
 CHKD BY \_\_\_\_\_  
 DATE \_\_\_\_\_

LAK-91-3.83

OHIO  
 FHWA REGION


3  
 44

TYPICAL SECTIONS  
 TYPE 446

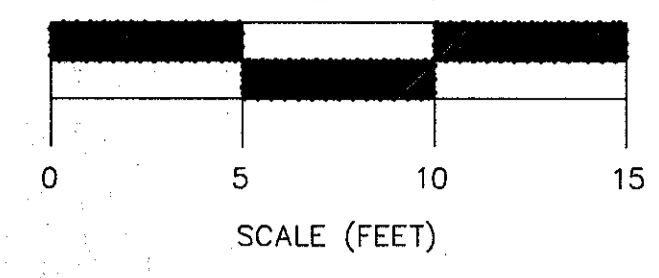

LEGEND

- ① ITEM 446 - 1-1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, AC 20
- ② ITEM 301 - 2-1/2" BITUMINOUS AGGREGATE BASE, AC-20
- ③ ITEM 403 - 1/2" ASPHALT CONCRETE, LEVELING COURSE
- ④ ITEM 407 - TACK COAT
- ⑤ ITEM 254 - 1-1/2" (NOMINAL) PAVEMENT PLANING, BITUMINOUS
- ⑥ ITEM 301 - 6" BITUMINOUS AGGREGATE BASE, AC-20
- ⑦ ITEM 617 - COMPACTED AGGREGATE, TYPE A
- ⑧ ITEM 605 - SHALLOW PIPE UNDERDRAIN, AS PER PLAN
- ⑨ ITEM 408 - BITUMINOUS PRIME COAT
- ⑩ ITEM 605 - AGGREGATE DRAINS

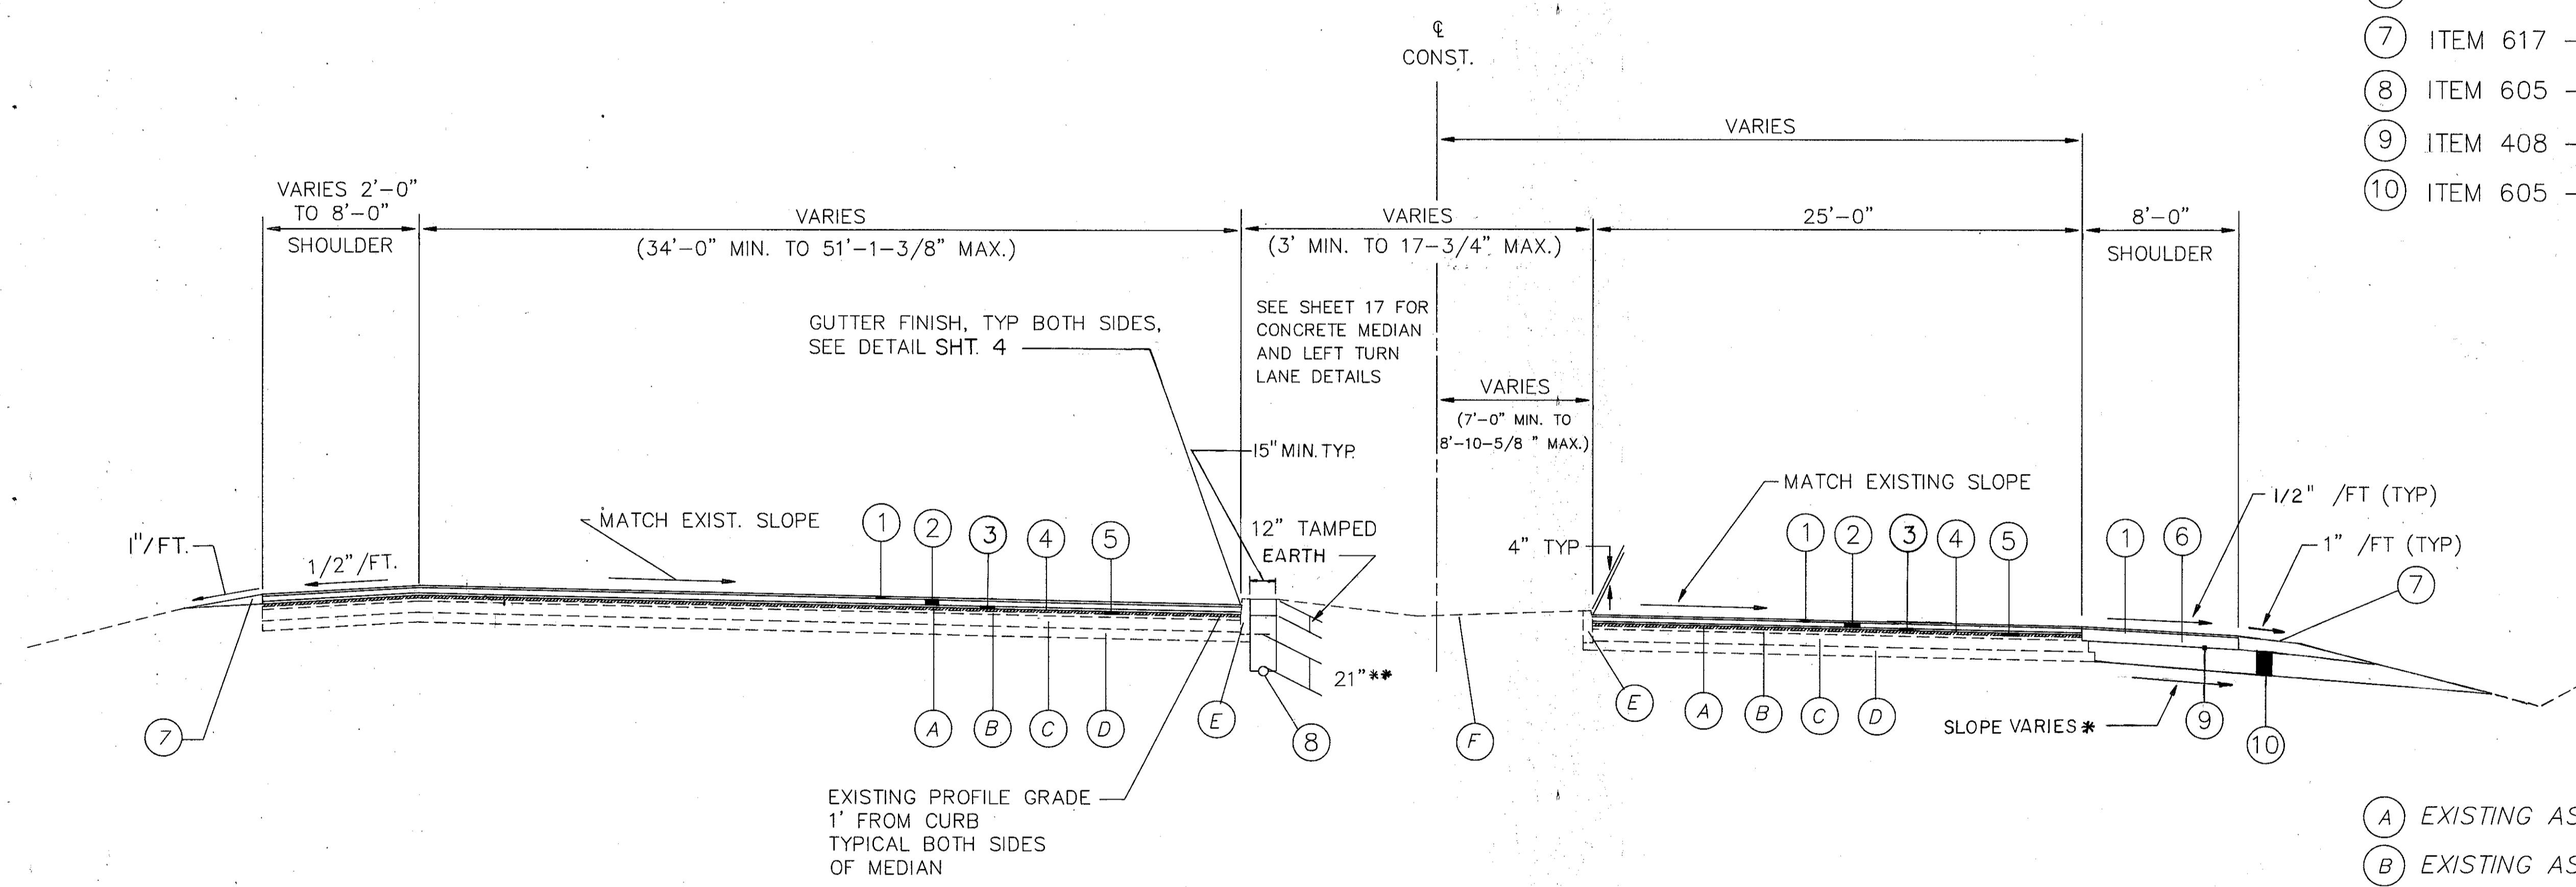

SUPERELEVATED SECTION (TRANSITION)

S.R. 91 STA. 202+34 TO STA. 206+00 = 366 L.F.

- Ⓐ EXISTING ASPHALT CONCRETE SURFACE COURSE
- Ⓑ EXISTING ASPHALT CONCRETE LEVELING COURSE
- Ⓒ EXISTING BITUMINOUS AGGREGATE BASE
- Ⓓ EXISTING SUBBASE
- Ⓔ EXISTING CONCRETE CURB, TYPE 6
- Ⓕ EXISTING CONCRETE MEDIAN (STA. 202+14.5 TO 204+85.5)  
 EXISTING GRASS MEDIAN W/CONC. CURBS (STA. 204+85.5 TO 206+00)

\*\* SEE PLAN SHEETS FOR FLOW LINE ELEVATIONS  
 \* SLOPE AGGREGATE DRAINS A MINIMUM OF 3/4"/FT.  
 SLOPE AGGREGATE DRAINS 1"/FT WHERE SUFFICIENT  
 DITCH DEPTH IS AVAILABLE.