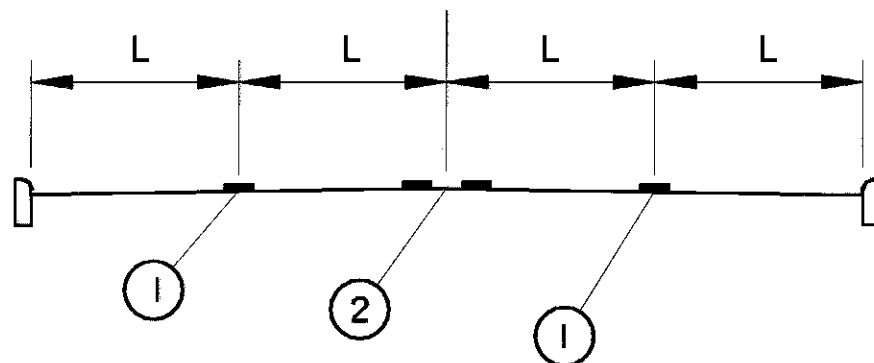


## NORTH RIDGE ROAD (US-20)


**LEGEND**

- ① — ITEM SPEC, LANE LINE
- ② — ITEM SPEC, CENTERLINE

**PAVEMENT MARKING TYPICAL**

SLD 28.014 (BEGIN WORK) TO SLD 28.330	=	0.32 KM	(L=3.05M)
SLD 28.330 TO SLD 30.220	=	1.89 KM	(L=3.27M)
SLD 30.220 TO SLD 31.044	=	0.82 KM	(L=3.05M)
SLD 31.044 TO SLD 31.800	=		(SEE SHEET 21-23 FOR DETAILS)
SLD 31.800 TO SLD 40.230	=	8.43 KM	(L=3.05M)
SLD 40.230 TO SLD 44.290	=	4.06 KM	(L=3.35M)
SLD 44.290 TO SLD 45.900	=		(NO WORK)
SLD 45.900 TO SLD 48.960	=	3.06 KM	(L=3.35M)
<b>TOTAL</b>	<b>=</b>	<b>18.58 KM</b>	

**INTERSECTION PAVEMENT MARKINGS**

INTERSECTING ROAD	SLD	DIR	ITEM SPEC EPOXY	
			STOP BAR	CROSSWALK
			METER	METER
SR 535	29.554	EB	6.6	
		WB	6.6	
BOWHALL ROAD	30.126	EB	6.6	
		WB	6.6	
LANE ROAD	33.071	EB	6.1	
		WB	6.1	12.2
CENTER ROAD	36.329	EB	6.1	
		WB	6.1	
TOWNLINE ROAD	40.152	EB	6.1	12.2
		WB	6.1	
MCMACKIN ROAD	41.021	EB	6.7	
		WB	6.7	
BURNS ROAD	43.563	EB	6.7	
		WB	6.7	
CO. LINE ROAD	48.941	EB	6.7	
<b>TOTAL</b>			<b>96.5</b>	<b>24.4</b>

**MAINLINE US-20 PAVEMENT MARKINGS**

SLD		ITEM SPEC EPOXY	
BEGIN	END	CENTERLINE KM	LANE LINE KM
28.014	28.251	0.24	
28.251	31.044	2.79	5.58
31.044	31.800	(SEE SHEET 21-23 FOR DETAILS)	
31.800	44.291	12.49	24.98
44.291	45.901	(NO WORK)	
45.901	48.961	3.06	6.12
<b>TOTALS</b>		<b>18.58</b>	<b>36.68</b>

**NOTES-**

QUANTITIES HAVE BEEN CARRIED TO THE GENERAL SUMMARY ON SHEET 12.

SEE SHEET 19 FOR THE US-20/SR-2 PAVEMENT MARKING DETAILS AND QUANTITIES.

EXACT LOCATION OF THE STOP BAR TO BE "AS DIRECTED BY THE ENGINEER"