



LAKE COUNTY  
SH. 2 SEC. Q (PT)  
ROADSIDE IMPROVEMENT

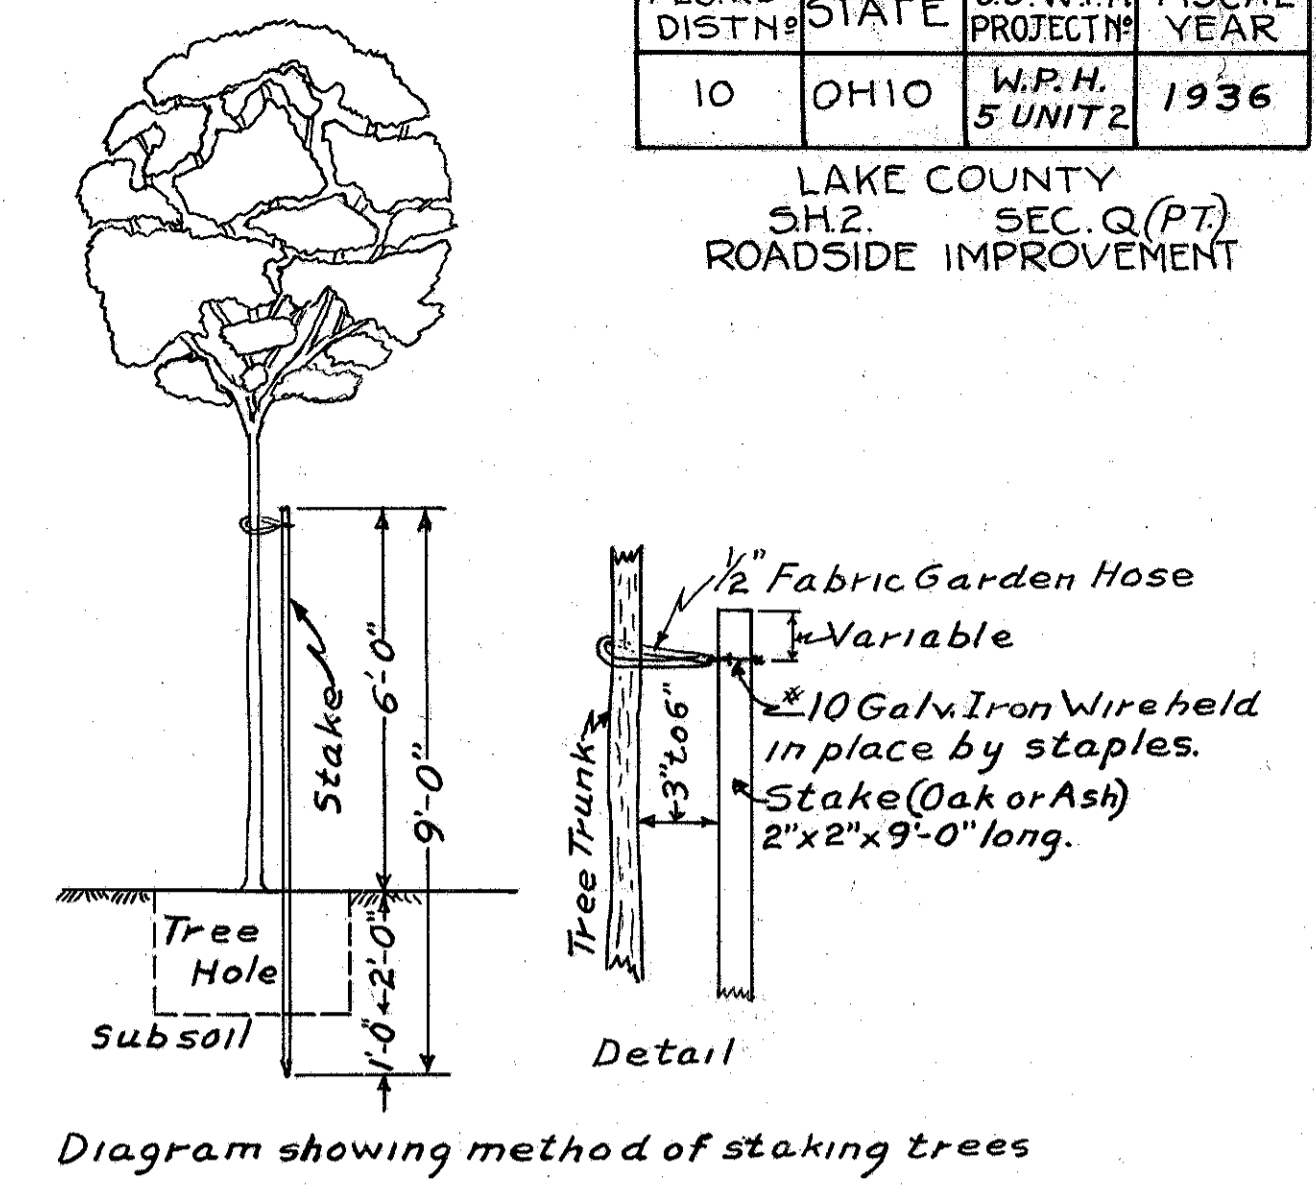

H. ROSS AKE  
Receiver of First National Bank in Geneva O.

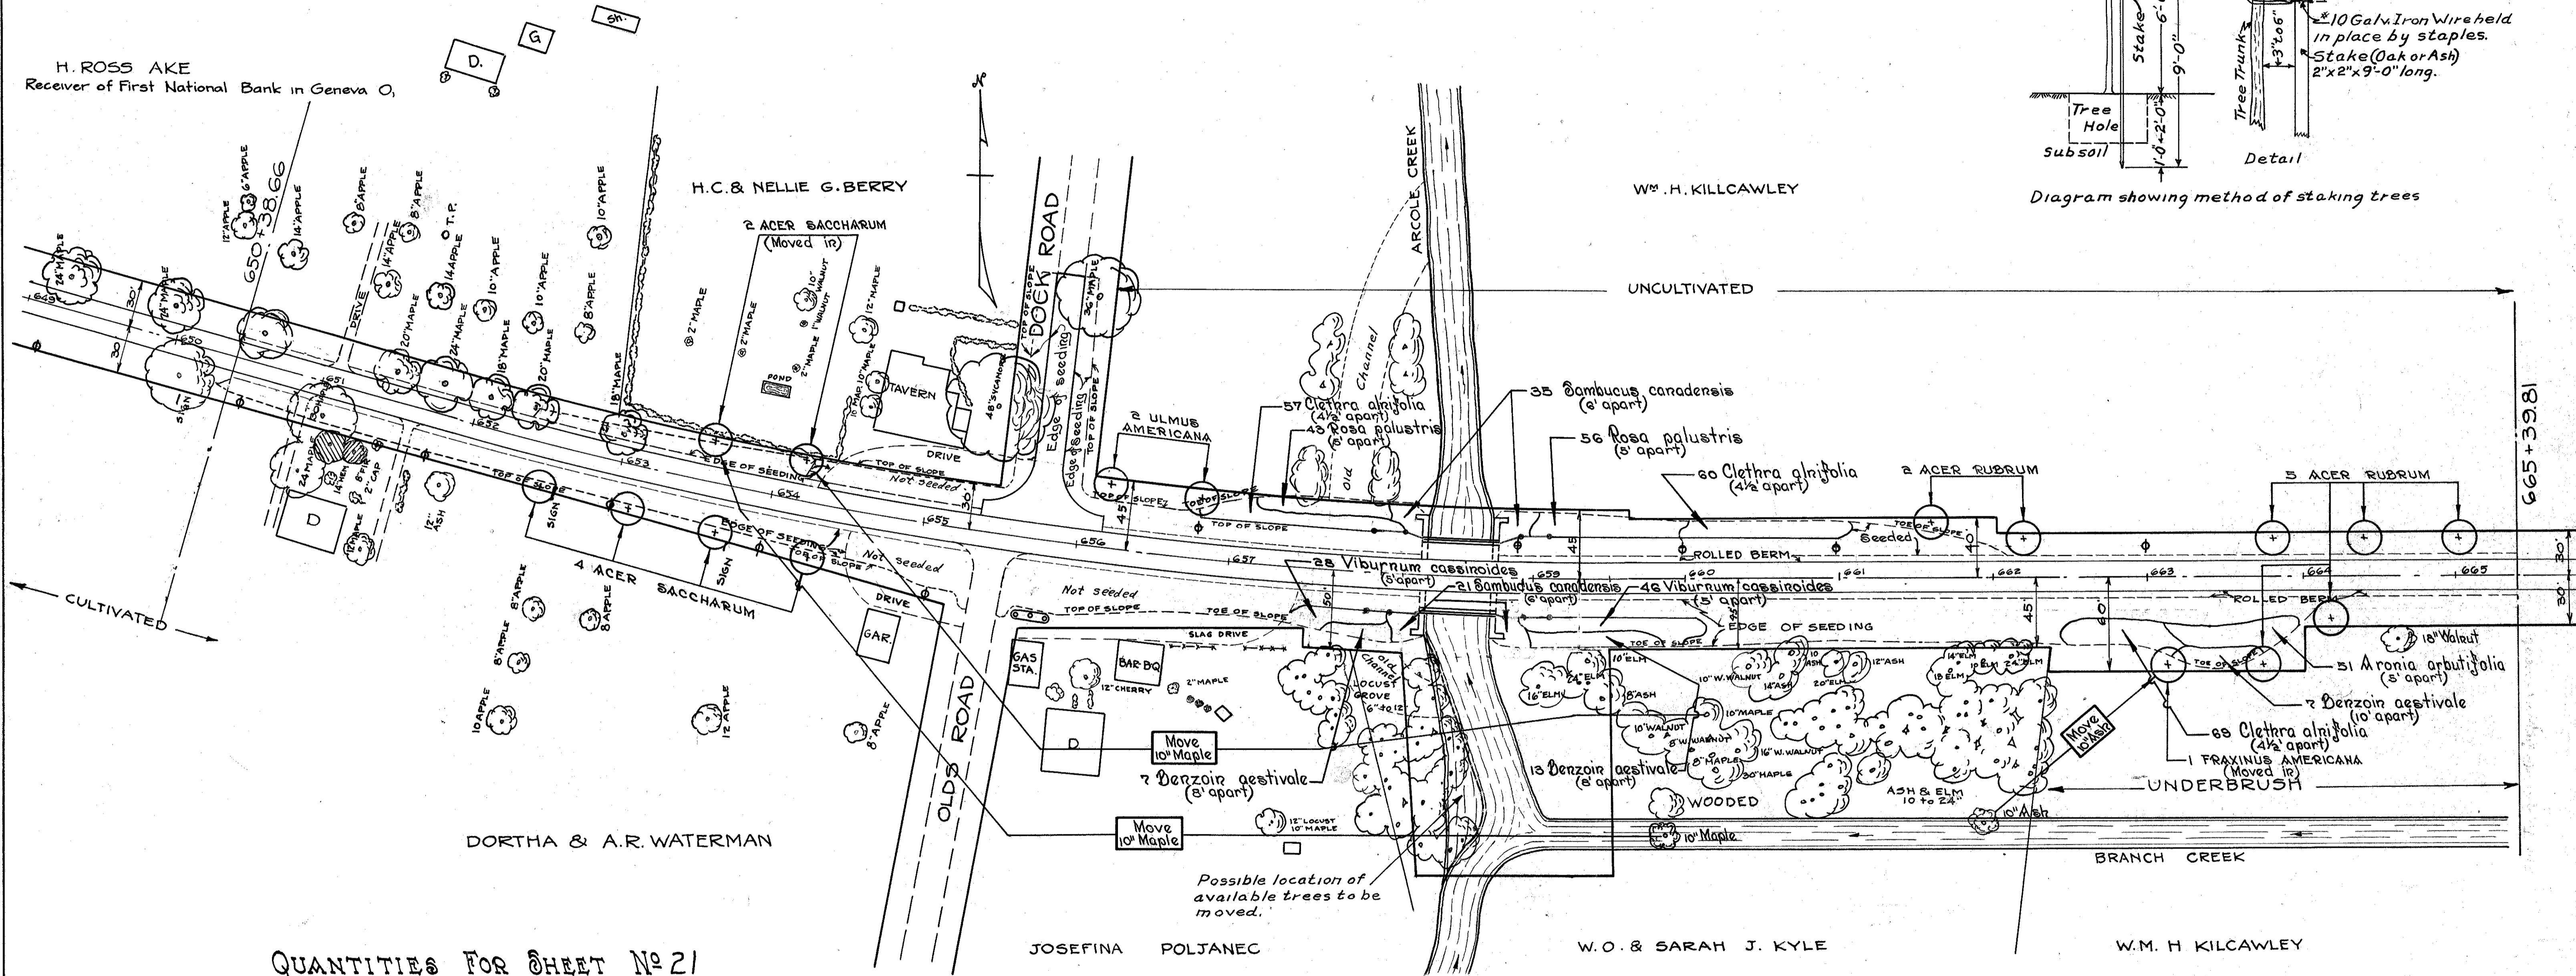

QUANTITIES FOR SHEET No 21

QUANTITIES	UNIT	ITEMS OF WORK	CONDITION	SIZES			SEASON FOR PLANTING
				CALIPER	HEIGHT	SPREAD	
1359	Lin. Ft.	Furnishing, Placing & Dressing Top Soil for Seeding & Sodding					
3812	Sq. Yds.	Seeding Area - Prepared, seeded, fertilized & mulched					
4	Each	Acer saccharum (Sugar Maple) Furnished & planted complete		1 1/2 to 1 3/4 In.			
7		Acer rubrum (Red Maple) Furnished & planted complete		1 1/2 to 1 3/4 In.			
2		Ulmus americana (American Elm) Furnished & planted complete		1 3/4 to 2 In.			
56		Sambucus canadensis (American Elder) Furnished & planted complete			3 to 4 Ft.		
99		Rosa palustris (Swamp Rose) Furnished & planted complete			2 to 3 Ft.		
186		Clethra alnifolia (Sweet Pepper Bush) Furnished & planted complete			2 1/2 to 3 Ft.		
27		Denzior aestivale (Spice Bush) Furnished & planted complete	D&D (16/n)		3 to 4 Ft.		
51		Aronia arbutifolia (Red Chokeberry) Furnished & planted complete			2 to 3 Ft.		
74		Viburnum cassinoides (Vithe Rod) Furnished & planted complete			2 to 3 Ft.		
2		Existing Maple Trees to be moved		10 Inch			
1		Existing Ash Tree to be moved		10 Inch			
560	Cu. Yds.	Topsoil salvaged and Stockpiled					
790	Sq. Yds.	Seeding (over old channel), (estimated)					

NOTE: FIGURE AFTER B&B INDICATES MINIMUM DIAMETER IN INCHES ALLOWABLE FOR BALL.