


# TYPICAL SECTIONS

TYPE 404

FHWA REGION	STATE	PROJECT	
5	OHIO		

5  
114

LAKE COUNTY  
LAK-20-G.65

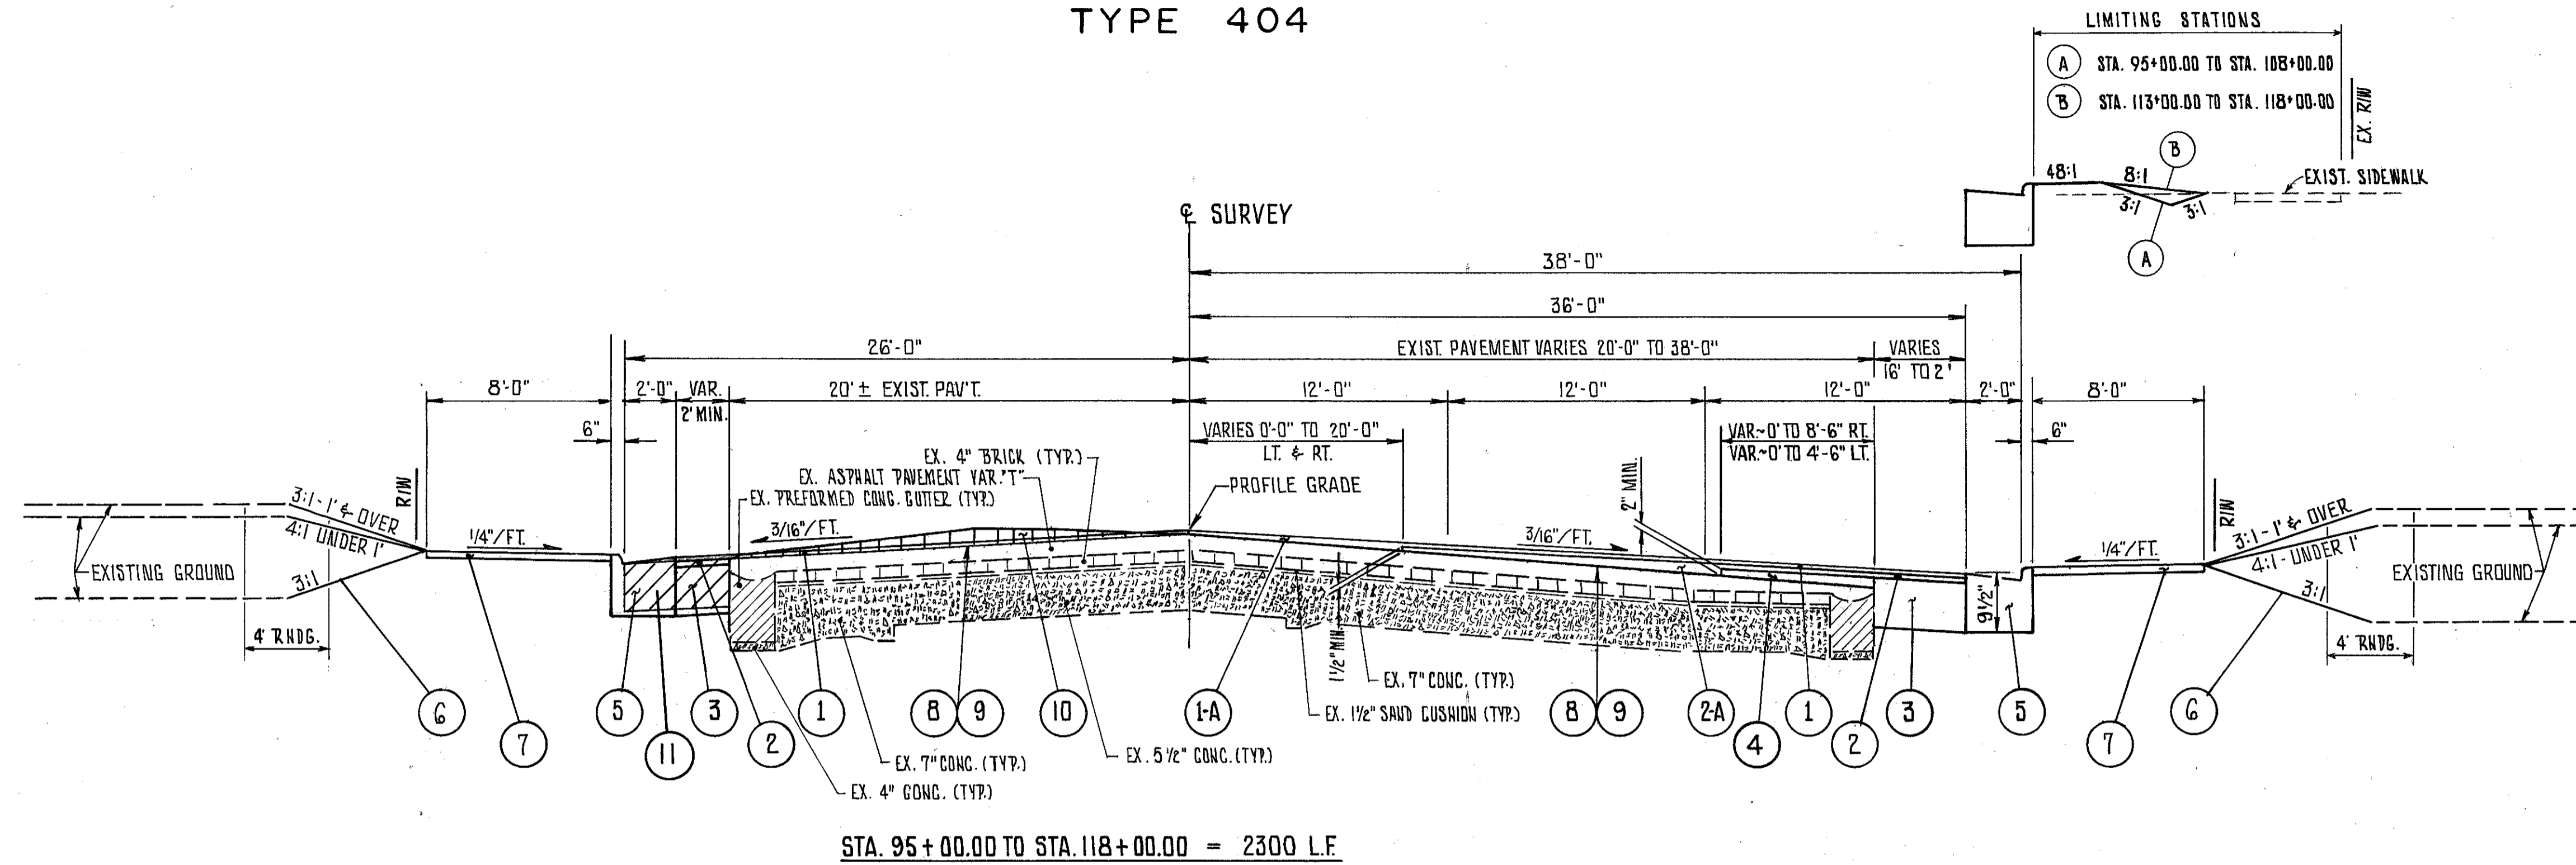

REF.	ITEM	DESCRIPTION
①	404	1 1/4" ASPHALT CONCRETE AC-20.
①A	404	VARIABLE THICKNESS ASPHALT CONCRETE AC-20 (1 1/4" TO 2 3/4").
②	402	1 3/4" ASPHALT CONCRETE AC-20.
②A	402	VARIABLE THICKNESS ASPHALT CONCRETE AC-20 (1 1/2" TO 3 3/4").
③	301	6 1/2" BITUMINOUS AGGREGATE BASE, AC-20, RT-11 OR RT-12.
④	301	VAR.T. BITUMINOUS AGGREGATE BASE, AC-20 RT-11 OR RT-12.
⑤	609	COMBINATION CURB AND GUTTER, TYPE 2 (MODIFIED AS PER PLAN).

REF.	ITEM	DESCRIPTION
⑥	660	SODDING.
⑦	608	4" CONCRETE WALK.
⑧	407	TACK COAT
⑨	407	COVER AGGREGATE
⑩	202	EXISTING WEARING COURSE REMOVED
⑪		TEMPORARY PAVEMENT, CLASS 'B' (SEE MAINTENANCE OF TRAFFIC PLANS.)

**NOTES**

1. TYPICAL SECTIONS ARE INTENDED TO SHOW GENERAL ROADWAY AND PAVEMENT FEATURES ONLY. FOR FURTHER DETAILS SEE REMAINING PLAN AND PROFILES, PAVEMENT DETAILS AND GROSS SECTIONS.
2. MODIFIED THE 9" THICKNESS ON THE TYPE 2 CURB AND GUTTER TO MEET THE PROPOSED PAVEMENT BUILD-UP OF 9 1/2".
3. FINISHED GRADE ON ITEM 404 TO BE 1/4" ABOVE GUTTER PLATE.
4. TYPICAL NOT DRAWN TO SCALE.