


CURVE TABLE						
LOT	CURVE	RADIUS	LENGTH	TANGENT	CHORD	BEARING
CENTERLINE	C1	200.00	333.83	220.71	296.41	N46°37'24"E
CENTERLINE	C2	200.00	42.14	21.15	42.06	N04°50'30"E
S/L 1	C3	30.00	47.12	30.00	42.43	S49°26'30"W
S/L 1	C4	230.00	38.67	19.38	38.63	N89°37'30"E
S/L 2	C5	230.00	78.53	39.85	78.15	N75°01'36"E
S/L 3	C6	230.00	103.45	52.62	102.59	N52°21'33"E
S/L 4	C7	230.00	61.23	30.80	61.05	N31°50'49"E
S/L 4	C8	30.00	40.14	23.72	37.21	S62°32'57"W
S/L 5	C9	30.00	25.23	13.42	24.49	N55°01'38"W
S/L 5	C10	60.00	95.51	61.28	85.74	S78°32'11"E
S/L 6	C11	60.00	47.38	25.00	46.16	N35°14'09"E
S/L 7	C12	60.00	47.37	25.00	46.15	N10°00'15"W
S/L 8	C13	60.00	99.16	65.13	88.25	N79°57'58"W
S/L 8	C14	30.00	25.23	13.42	24.49	N76°47'00"E
S/L 8	C15	30.00	40.80	24.26	37.73	S40°09'30"E
S/L 11	C16	30.00	33.69	18.87	31.95	S30°58'47"W
S/L 11	C17	60.00	65.45	38.41	62.25	N31°54'23"E
S/L 12	C18	60.00	47.43	25.03	46.20	N21°59'16"W
S/L 13	C19	60.00	47.22	24.81	46.01	N67°10'49"W
S/L 14	C20	60.00	17.98	9.06	17.91	S81°41'25"W
S/L 15	C21	60.00	35.10	18.07	34.60	S56°20'56"W
S/L 16	C22	60.00	47.33	24.97	46.11	S16°59'31"W
S/L 17	C23	60.00	77.34	45.10	72.10	S42°32'07"E
S/L 17	C24	60.00	72.19	41.19	67.92	N44°58'43"W
S/L 18	C25	60.00	9.77	4.90	9.76	N05°51'37"W
S/L 20	C26	170.00	175.98	95.79	168.22	N28°27'37"E
S/L 21	C27	170.00	107.78	55.77	105.99	N78°16'43"E
S/L 21	C28	30.00	47.12	30.00	42.43	S40°33'30"E

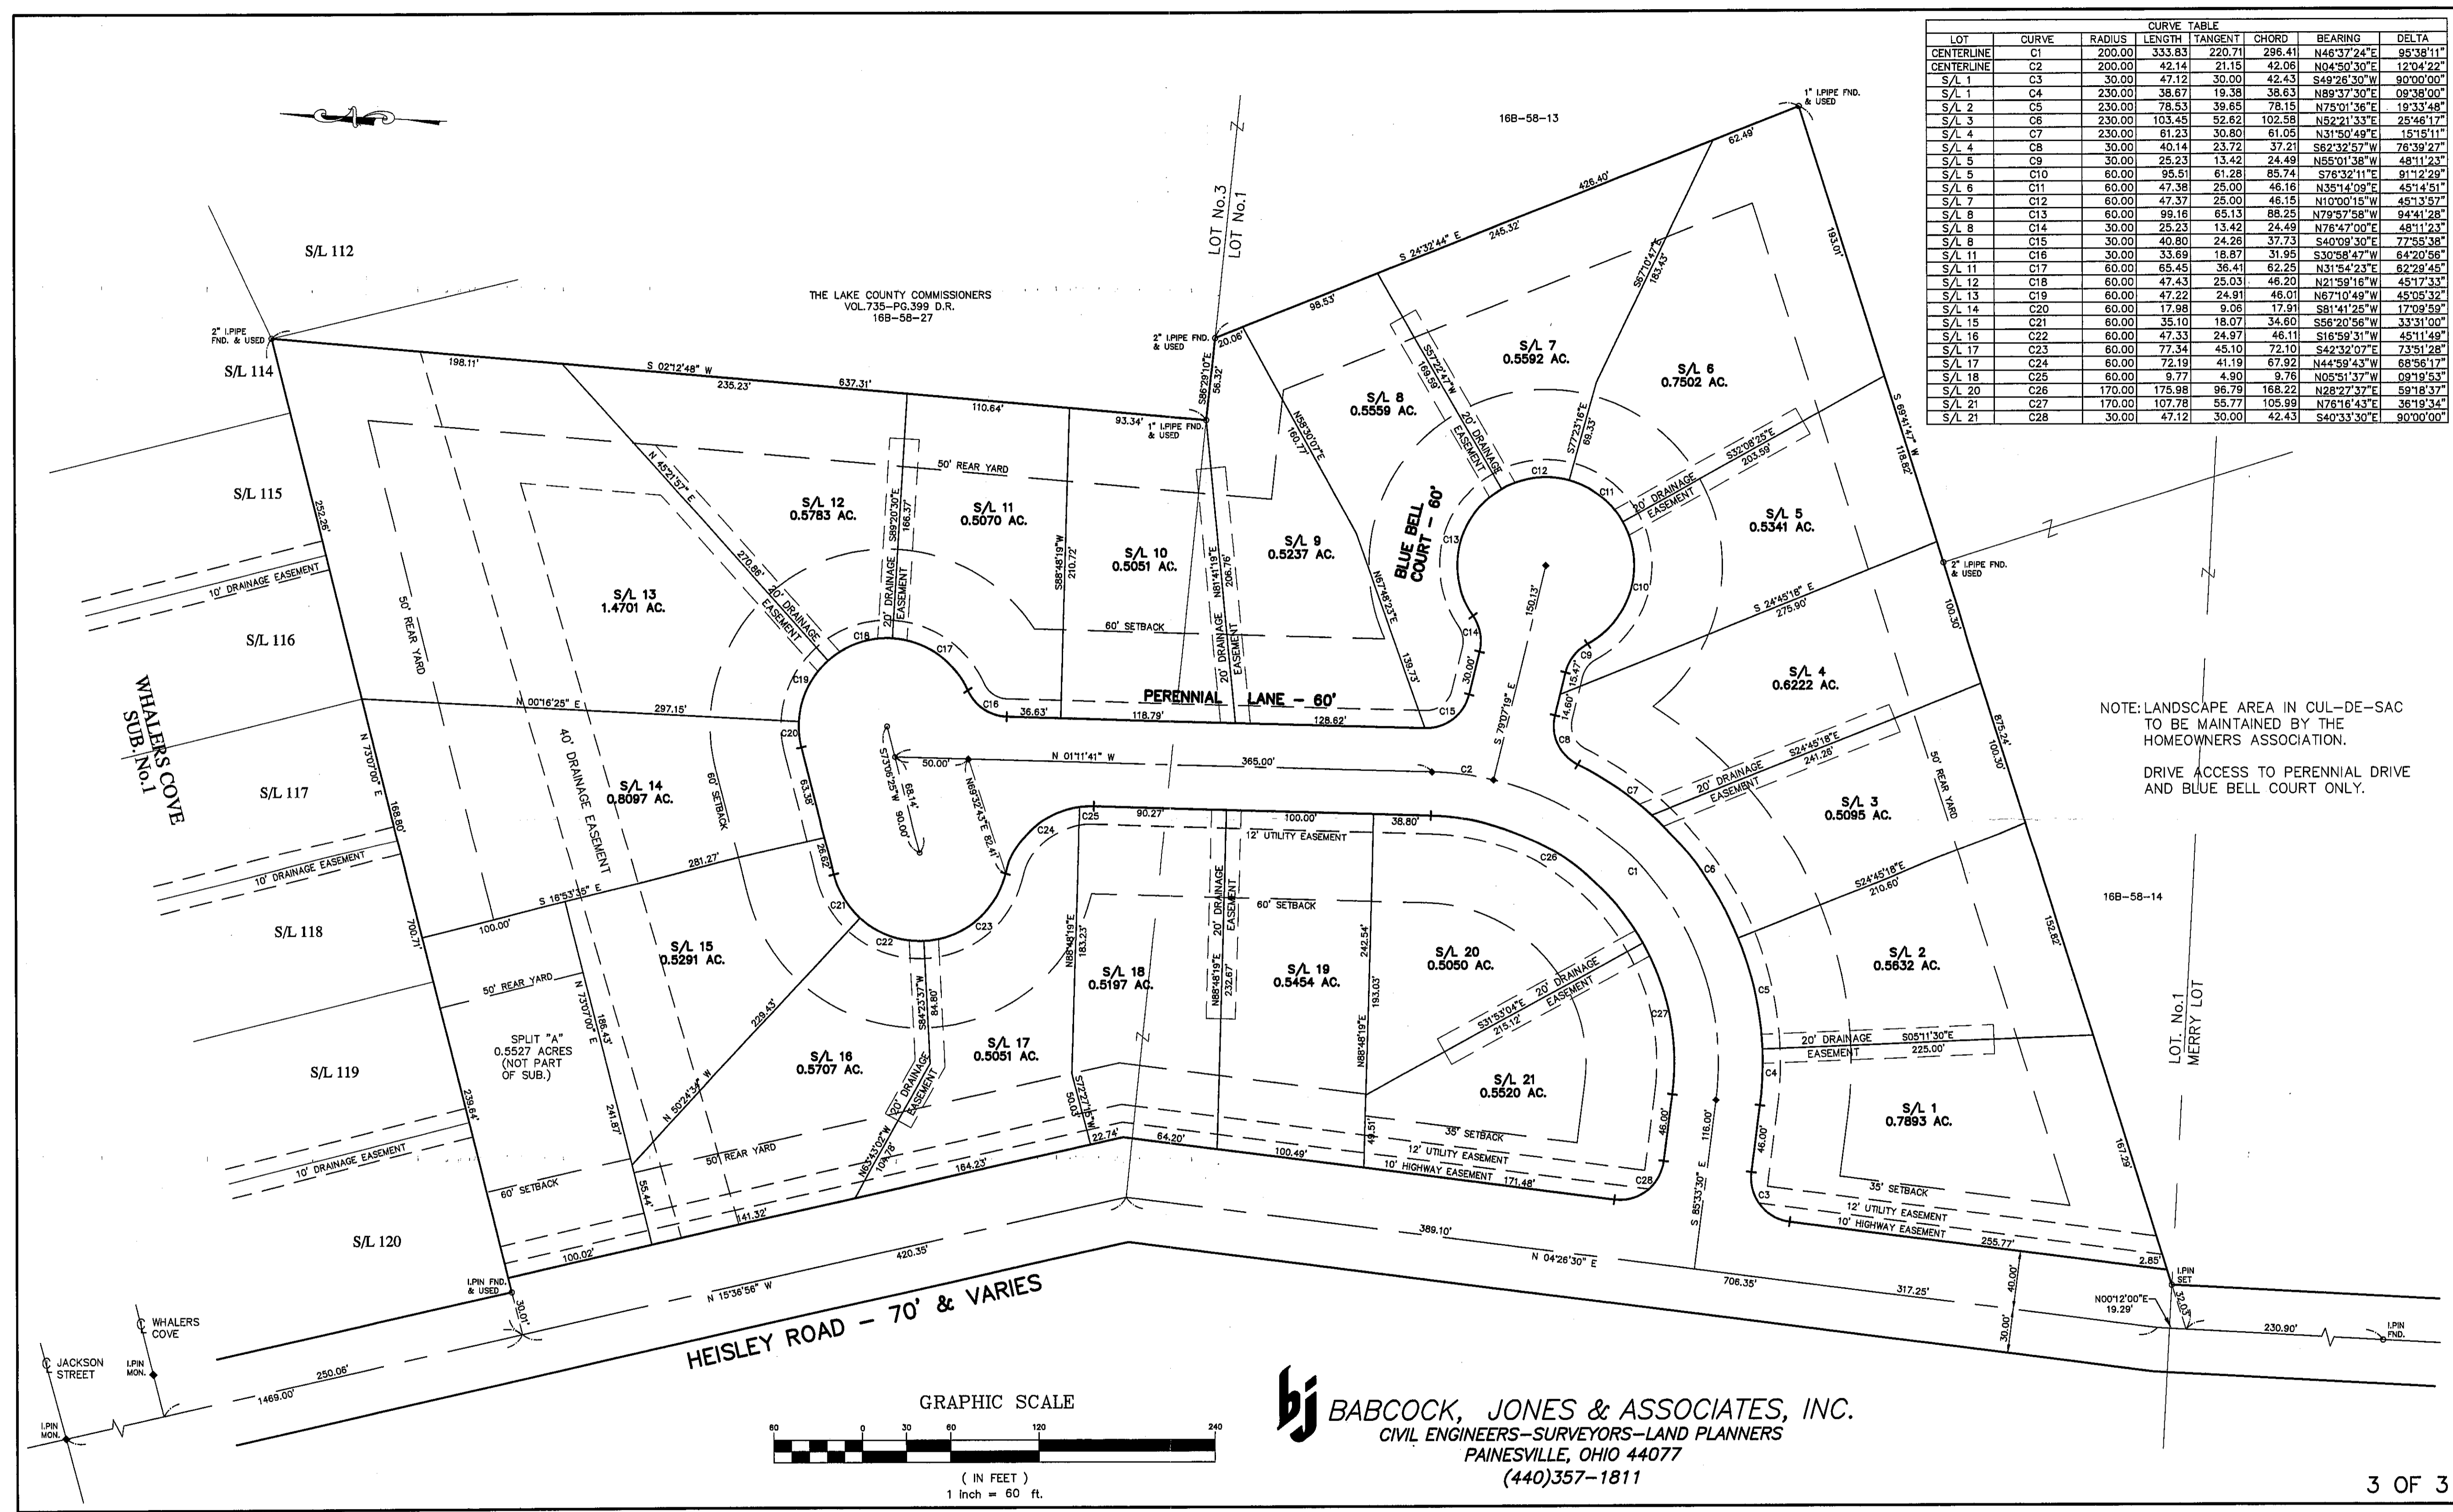

REV NO.	DESCRIPTION	DATE	BY	CHK'D

SPRINGBROOK SUBDIVISION
IMPROVEMENT PLANS
CITY OF MENTOR-LAKE COUNTY-OHIO

bj BABCOCK, JONES AND ASSOCIATES, INC
CIVIL ENGINEERS - SURVEYORS - LAND PLANNERS
PAINESVILLE OHIO 44077

DATE: DECEMBER 2000
DESIGN BY: H.J.
DRAWN BY: T.R.
APPROVED BY: H.J.

SUBDIVISION PLAT

SCALE: 1"=60'
JOB NO: 00-246
SHEET 15 OF 15