

CONSTRUCTION
P.I. 78+73.76
A. 7°05' Lt.
D. 1°-30'
E. 7.3
T. 236.4'
L. 472.22'
R. 3819.72
P.C. 76+37.36
P.T. 81+09.58

STATION 81+98.43 END OF F.A.P. 666-1(1)

Equality of Stationing is due to changes in alignment

STA. 82+00 BEGINNING OF OLD WPAH 666-G

Note: Marker to be furnished and erected on the Left by the State before acceptance of this project.

Additional pavement to be removed = 118.6 sq. yd.

FINAL SURVEY PLOTTED AREAS CHECKED

ORIGINAL SURVEY PLOTTED AREAS CHECKED

TREE REMOVAL

ITEM No.	STATION	Rt.	SIZE
1-T	75+62	Lt.	25"
2-T	75+36	Lt.	24"
3-T	76+32	Rt.	28"
4-T	77+26	Rt.	25"
5-T	77+34	Lt.	27"
6-T	77+44	Rt.	25"
7-T	77+63	Rt.	25"
8-T	78+19	Rt.	25"
9-T	78+38	Rt.	25"
10-T	78+58	Rt.	25"
11-T	79+05	Lt.	20"
12-T	79+40	Lt.	24"
13-T	80+09	Lt.	22"
14-T	80+44	Lt.	18"
15-T	80+77	Lt.	20"

PRIVATE DRIVES & ROAD APPROACHES

ITEM No.	STATION	Rt.	Agg. Cu. Yds.
1-E	75+32	L	2.0
2-E	75+72	R	2.0
3-E	75+79	L	2.0
4-E	77+00 DBL	L	6.0
5-E	78+00 DBL	L	6.0
6-E	78+50	R	2.0
7-E	78+90	L	2.0
8-E	80+20	R	3.0
9-F	81+85	L	2.0

Total = 27.0

STORM SEWER

Item No.	From Station	To Station	R Pipe Lin. Ft. 1-8-1	No. 2	Remarks
1-D	76+01	78+19	L 12"		Curb Inlet Lt. Sta. 76+00
2-D	78+21	79+99	L 12"		Curb Inlet Lt. Sta. 78+20
3-D	80+01	81+79	L 12"		Curb Inlet Lt. Sta. 80+00
4-D	81+75	81+89	L 24"		Curb Inlet Lt. Sta. 81+74

Total 592

CONCRETE SIDE WALK (L)


Sta. 75+00 to 81+98.4 = 698.4 Lin. Ft. Net.
4 Drives @ 20' = 80.0 Lin. Ft.
2 Drives @ 40' = 80.0 Lin. Ft.
160.0 Lin. Ft.
160x4 = 640 Sq. Ft. 6" Sidewalk
Deductions for Inlets
4 - 7' @ 50' = 20.0 Sq. Ft.
(698.4-160)x4-20 = 2134 Sq. Ft. 4" Walk.

MONUMENT BOX & BENCH MARK ASSEMBLY

Item No.	Station	Side	Mon. Box	Bench Mk.
1-M	78+73.76	733 Rt.		
1-B	81+50	24.5 Lt.		

Total 1

Trees Marked Huson and to remain in place

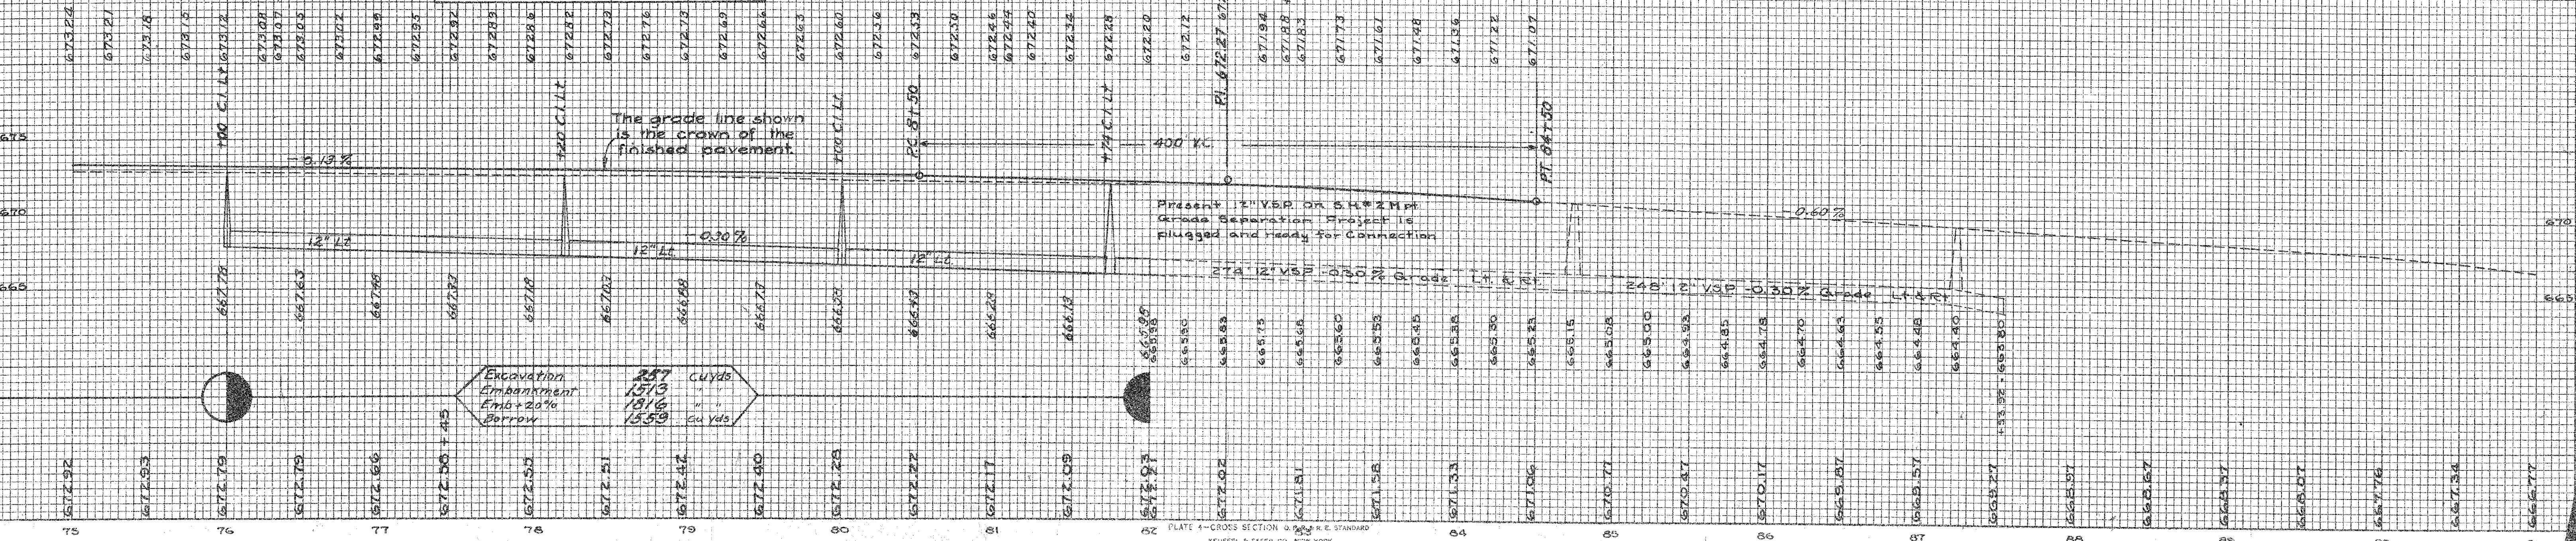

TYPICAL SECTION ADJOINING THIS PROJECT AT STA. 82+00

The grade line shown is the crown of the finished pavement.

Present 12" V&P on 54" 21" H.P. Grade Separation Project is plugged and ready for connection

Excavation Embankment Emb + 20% Borrow

257	Cu Yds
1573	"
1816	"
1559	Cu Yds