



TYPICAL SECTIONS EXISTING LAKELAND BLVD. TYPE T-35 ASPHALTIC CONCRETE PAV'T. SCALE 1/4" = 1'-0"

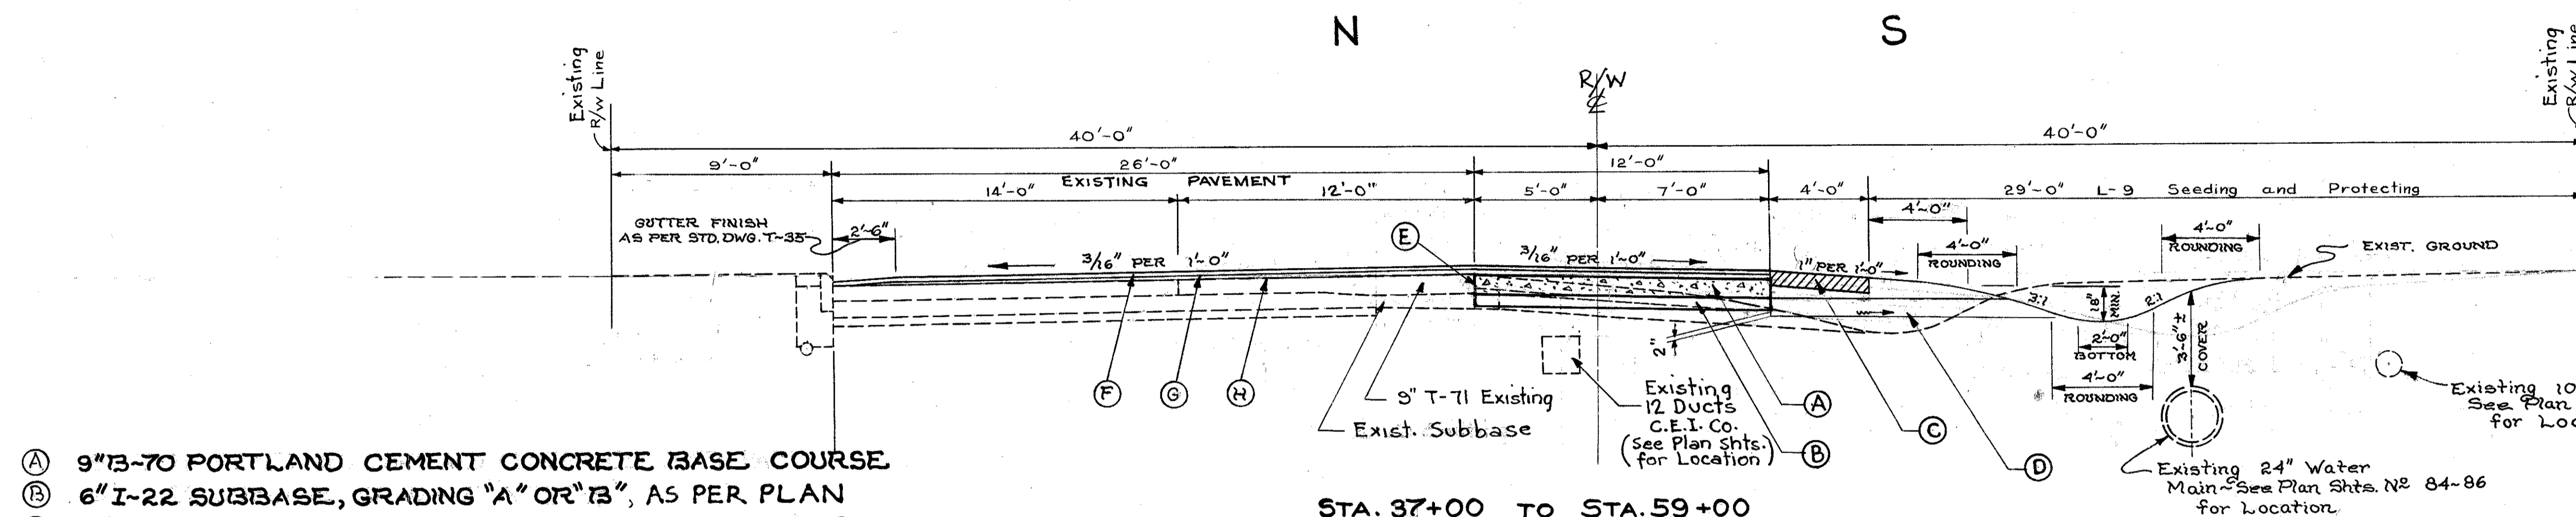

NOTE:
Use Ditch Section at left between Sta. 37+00± and Sta. 56+15
Use Ditch Section below between Sta. 57+60± and Sta. 59+00±

- (A) 9" 13-70 PORTLAND CEMENT CONCRETE BASE COURSE
- (B) 6" I-22 SUBBASE, GRADING "A" OR "B", AS PER PLAN
- (C) 6" I-18 STABILIZED CRUSHED AGGREGATE SHOULDER
- (D) I-9 STONE UNDERDRAIN (SPACED 50' CTR. TO CTR.) #2
- (E) STANDARD EXPANSION BOLT JOINT
- (F) 1 1/4" T-35 ASPHALTIC CONCRETE SURFACE COURSE, TYPE "C" (70-85)
- (G) 1 1/4" MIN. T-35 ASPHALTIC CONCRETE LEVELING COURSE (70-85)
- (H) T-30 BITUMINOUS TACK COAT @ 0.10 GAL./S.Y.
SEC. M-5.5, MS-2 OR RS-1
OR SEC. M-5.2, RC-1 OR RC-2 OR RC-3
AS PER SEC. T-30.02

STA. 37+00 TO STA. 59+00
STA. 18+20± TO STA. 21+00 } VARIABLE WIDTH WIDENING
STA. 59+00 TO STA. 62+00 }

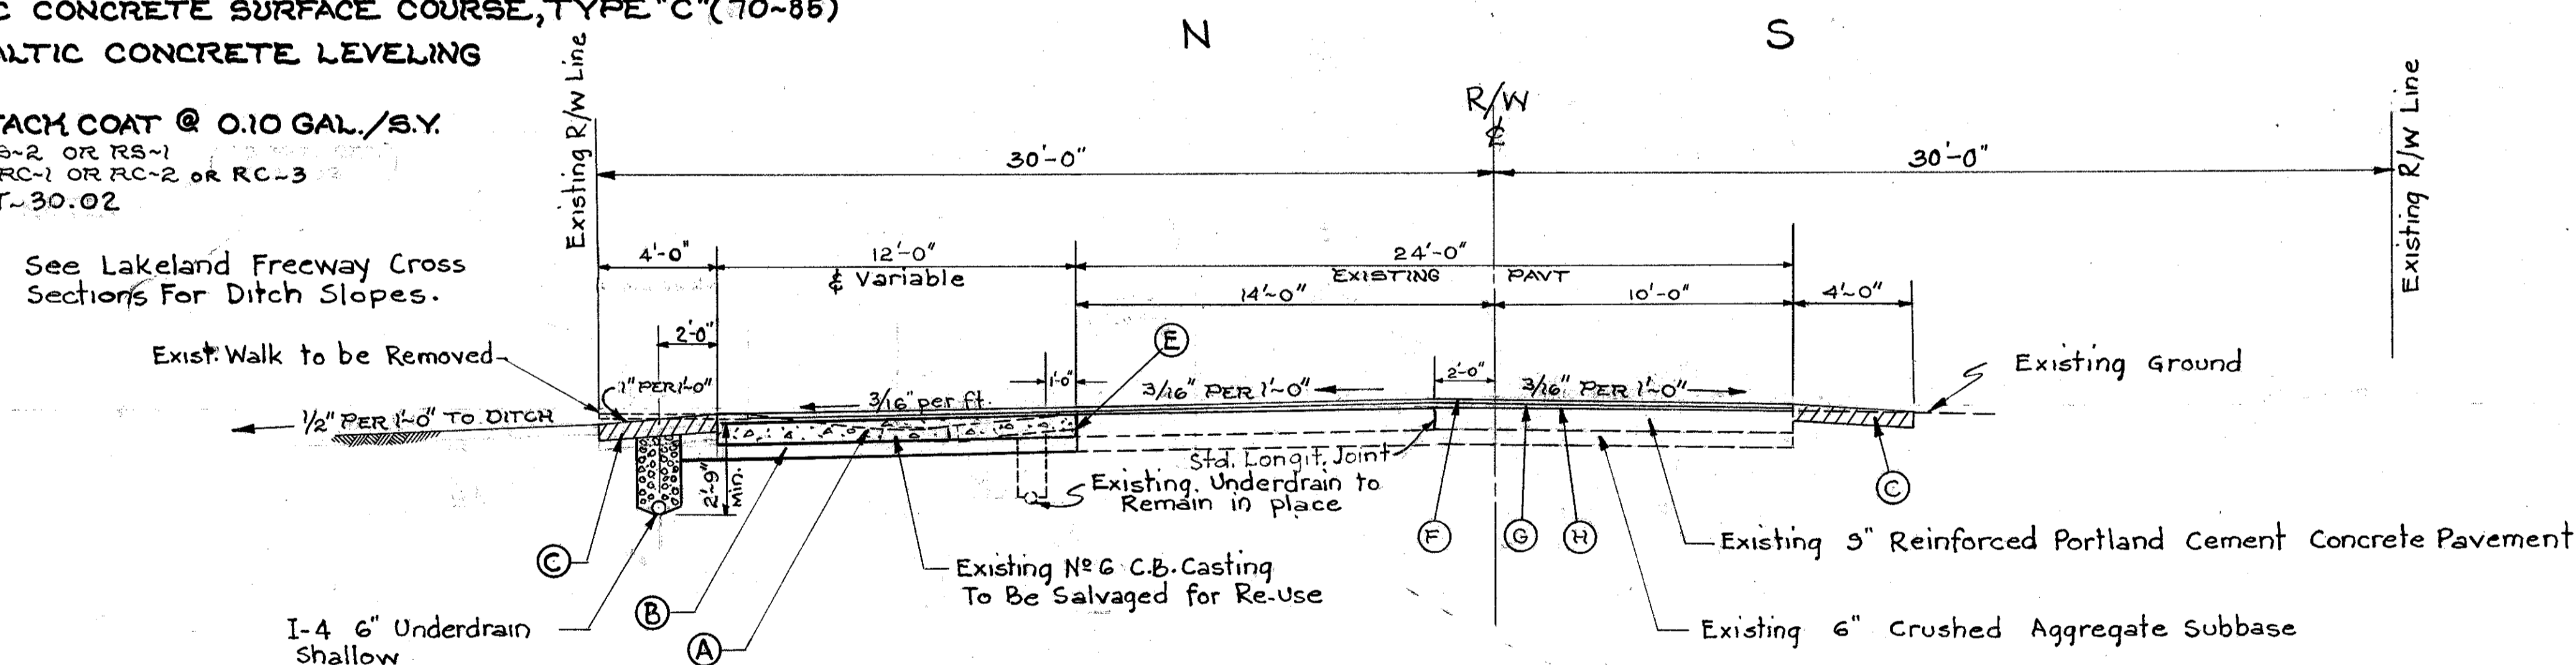

STA. 2+50 TO STA. 13+00
STA. 0+00 TO STA. 2+50 } VARIABLE WIDTH WIDENING
STA. 13+00 TO STA. 16+00± }

