



Curve Data
 Δ = 113°35'24"
 D = 1°00'
 L = 1153.667
 R = 5729.580
 T = 579.801
 C = 1153.709
 E = 29.264

DECELERATION LANE		
STATION	WIDTH (FT)	ELEV. RIGHT SIDE
295+00	7.2	649.57
+25	8.4	649.30
+50	9.6	649.41
+75	10.8	649.30
296+00	12.0	649.18
+25	12.0	649.07
+50	12.0	648.93

SEE SHEET N° 64
FOR
STORM SEWERS

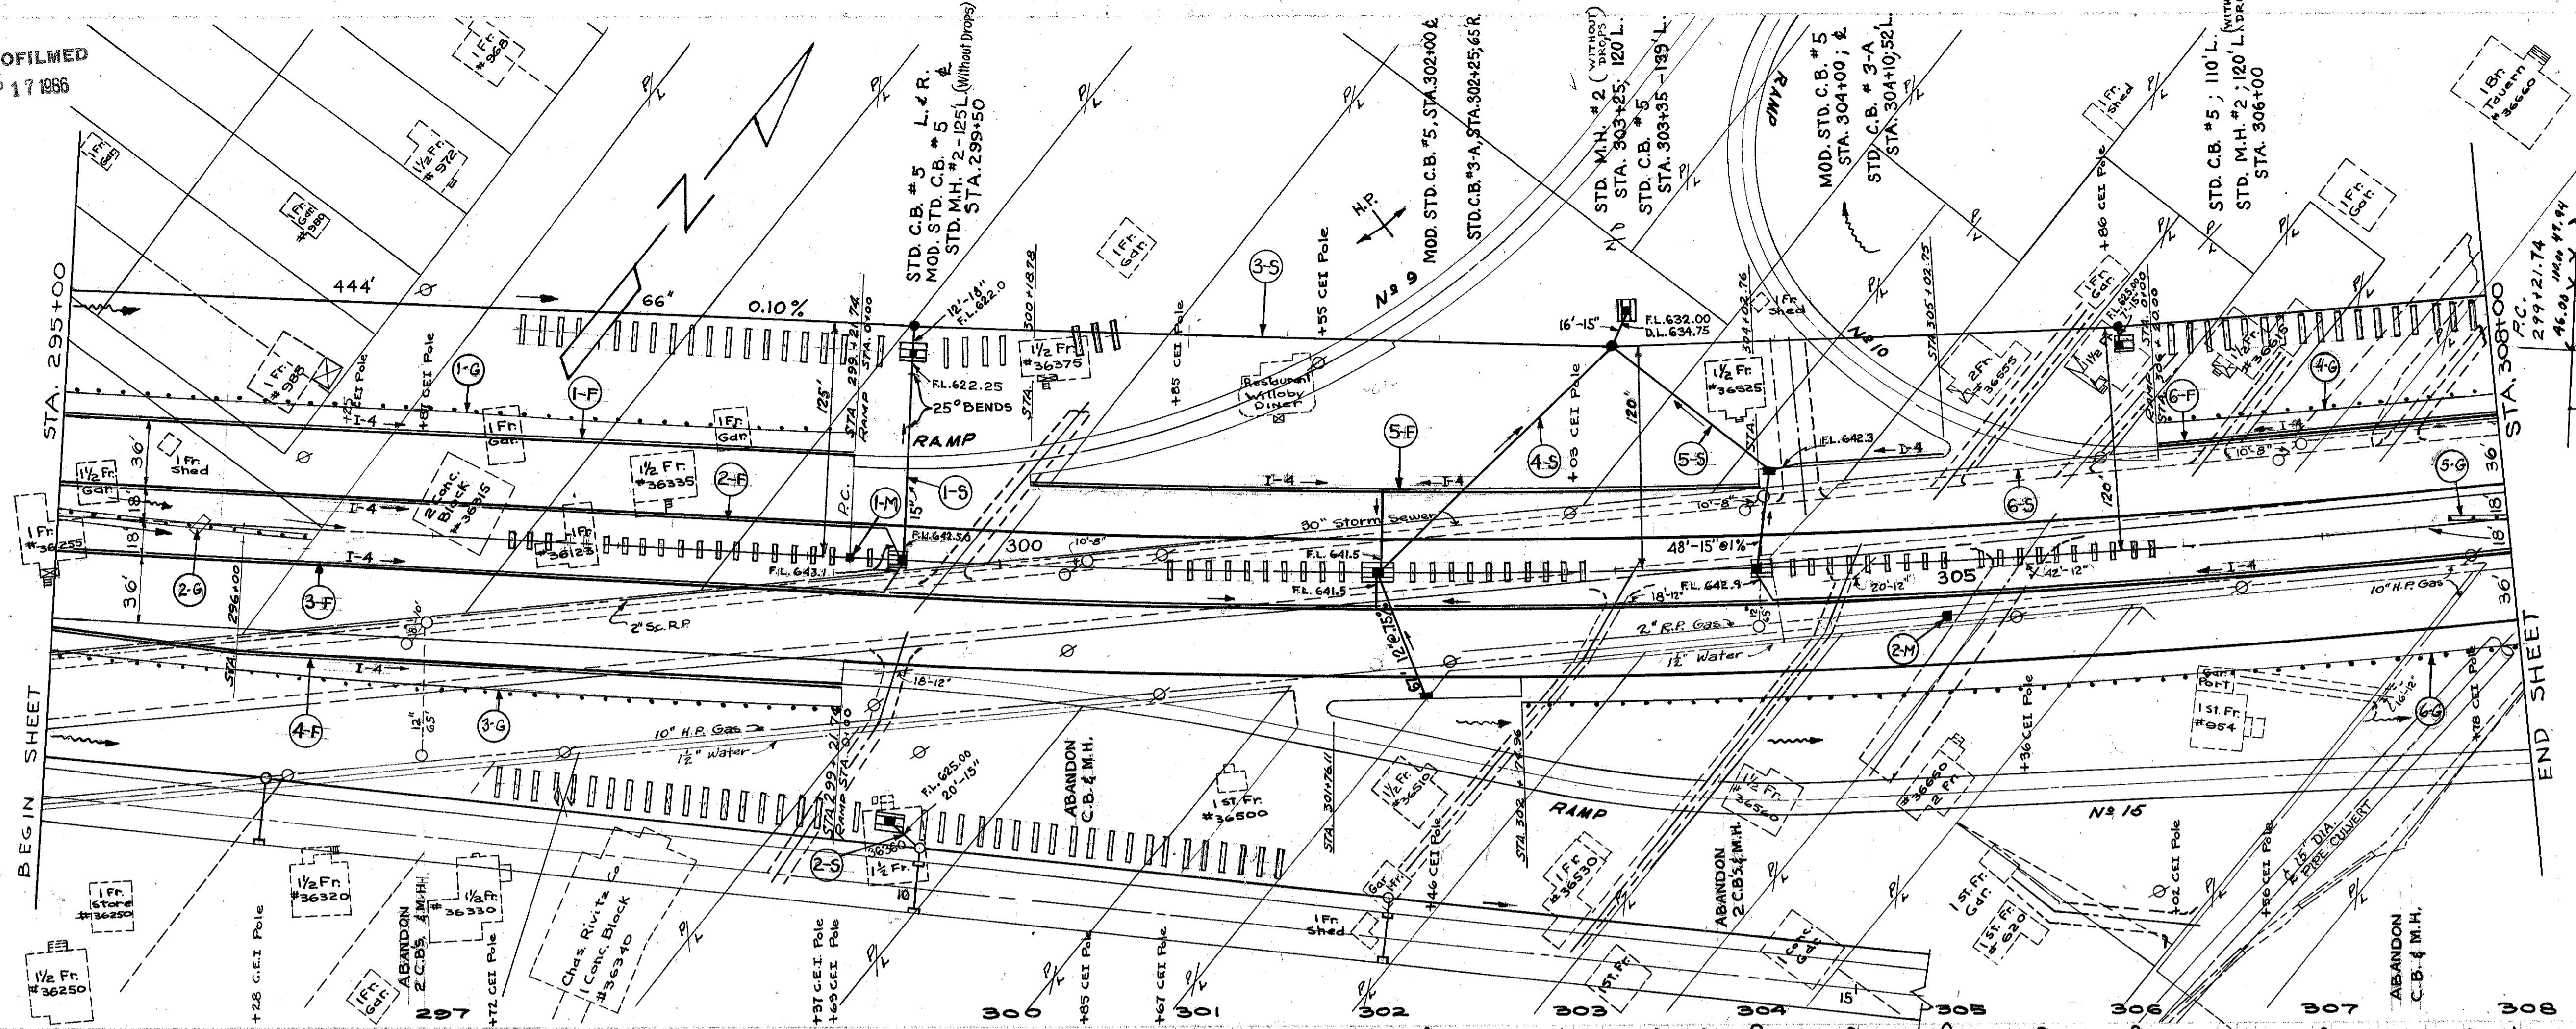

- 649.87
- 649.82
- 649.75
- 649.66
- 649.55
- 649.43
- 649.29
- 649.14
- 648.96
- 648.77
- 648.57
- 648.34
- 648.10
- 647.60
- 647.10
- 646.60
- 646.10
- 645.86
- 645.65
- 645.47
- 645.32
- 645.21
- 645.12
- 645.07
- 645.05
- 645.06
- 645.10
- 645.17
- 645.27
- 645.41
- 645.57
- 645.77
- 646.00
- 646.50
- 647.00
- 647.50
- 648.00
- 648.50
- 649.00
- 649.24
- 649.46
- 649.66
- 649.84

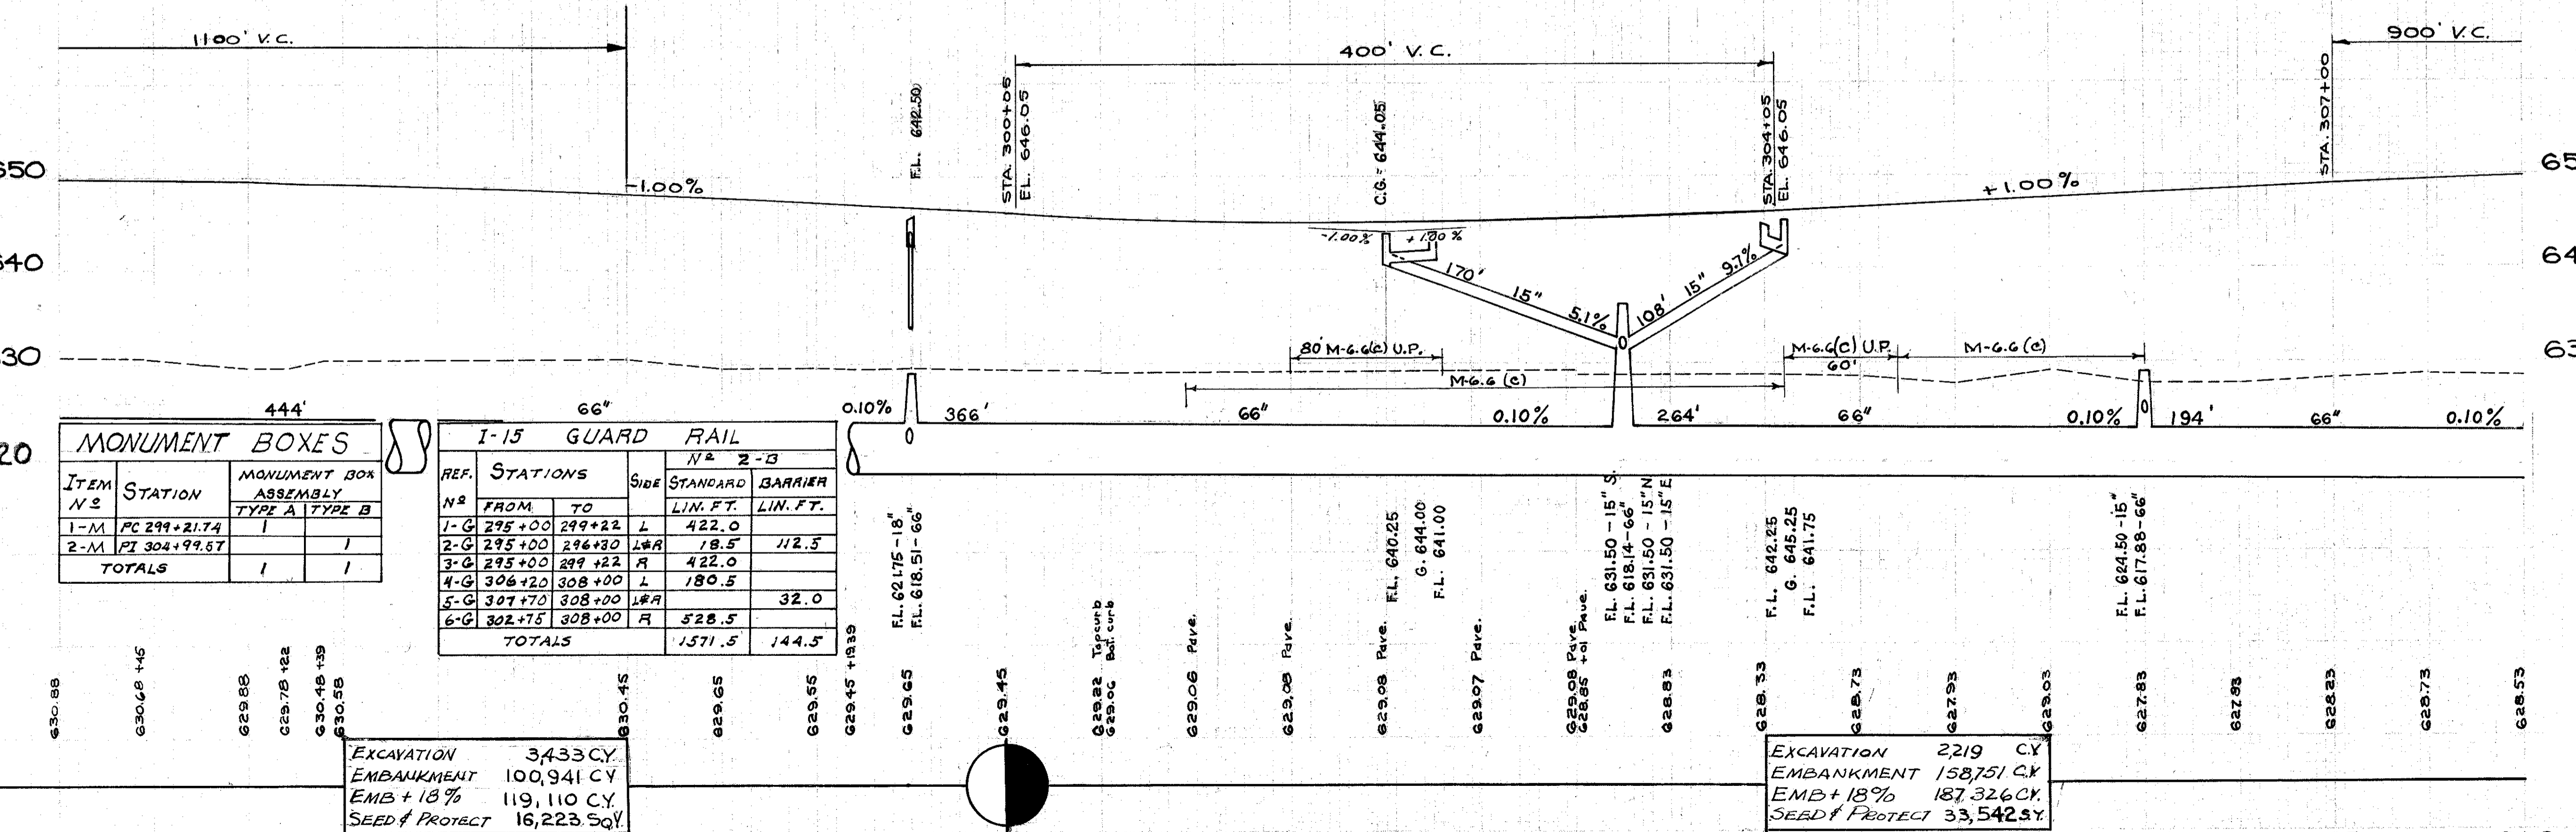

MONUMENT BOXES		
ITEM N°	STATION	MONUMENT BOX ASSEMBLY TYPE A TYPE B
1-M	PC 299+21.74	
2-M	PT 304+99.67	
TOTALS		

I-15 GUARD RAIL					
REF. N°	STATIONS		SIDE	N° 2-3	
	FROM	TO		STANDARD LIN. FT.	BARRIER LIN. FT.
1-G	295+00	299+22	L	422.0	
2-G	295+00	296+30	L/R	18.5	112.5
3-G	295+00	299+22	R	422.0	
4-G	306+20	308+00	L	180.5	
5-G	307+70	308+00	L/R		32.0
6-G	302+75	308+00	R	528.5	
TOTALS				1571.5	144.5

REF. STATION N°	6" UNDERDRAINS					
	I-2	I-4	I-5	I-5	I-5	I-5
FROM TO	SHALLOW OUTLET PIPE	SHALLOW OUTLET PIPE	SHALLOW OUTLET PIPE	SHALLOW OUTLET PIPE	SHALLOW OUTLET PIPE	SHALLOW OUTLET PIPE
1-F 295+00 299+22	422					
2-F 295+00 296+30	446					
3-F 295+00 299+22	1304					
4-F 295+00 299+22	422					
5-F 300+19 305+03	180					
6-F 306+20 308+00	180					
TOTALS						3248

EXCAVATION 3433 CY
 EMBANKMENT 100,941 CY
 EMB + 18% 119,110 CY
 SEED & PROTECT 16,223 SQ Y

EXCAVATION 2219 CY
 EMBANKMENT 158,751 CY
 EMB + 18% 187,326 CY
 SEED & PROTECT 33,542 SQ Y