

Detour Bridge Note:-

The contractor shall construct, maintain and remove (upon completion of new bridge) a temporary detour bridge and approaches. Capacity of this bridge shall be at least 10 ton truck, and the clear width of roadway shall be at least 16ft. The approaches shall be surfaced with gravel or similar material for a width of 16 feet and shall have a suitable gradient at each end. The bridge and approaches shall be located on right-of-way provided by the county commissioners.



FED. RD. DIST. NO.	STATE	FED. AID PROJECT	FISCAL YEAR
	OHIO		

I.G.H. N<sup>o</sup> 520 SEG. B.  
LAKE COUNTY

Left Edge of Pav.	Width	Station	Grade Elev.	Right Edge of Pav.	
589.79	9.00	144+00	589.96	9.00	589.79
589.79	9.00	144+25	589.96	9.00	589.79
589.79	9.00	144+50	589.96	9.00	589.79
589.74	9.00	144+75	589.91	9.00	589.39
589.57	9.00	145+0	589.74	9.00	590.07
589.30	9.00	145+25	589.47	9.00	590.05
588.92	9.00	145+50	589.09	9.00	589.92
588.49	9.00	145+75	588.66	9.00	589.49
588.05	9.00	146+0	588.22	9.00	589.05
587.63	9.00	146+25	587.79	9.00	588.63
587.19	9.00	146+50	587.35	9.00	588.19
586.74	9.00	146+75	586.91	9.00	587.74
585.87	9.00	147+0	586.48	9.00	586.87
585.44	9.00	147+25	586.04	9.00	586.44
585.00	9.00	147+50	585.61	9.00	586.00
584.57	9.00	148+0	585.17	9.00	585.57
584.13	9.00	148+25	584.74	9.00	585.13
583.70	9.00	148+50	584.30	9.00	584.70
583.32	9.00	148+75	583.87	9.00	584.32
583.05	9.00	149+0	583.44	9.00	583.95
582.88	9.00	149+25	583.01	9.00	583.58
582.83	9.00	149+50	583.00	9.00	583.53
582.83	9.00	149+75	583.00	9.00	583.53
582.83	9.00	150+0	583.00	9.00	582.83
582.83	9.00	150+25	583.00	9.00	582.83
582.83	9.00	150+50	583.00	9.00	582.83

0.0 Sq.yds extra Pavement

Sta. 146+02 to Sta. 146+52  
Build 50' x 24" Beam Bridge  
See Special Plan Sheet # B.2.9

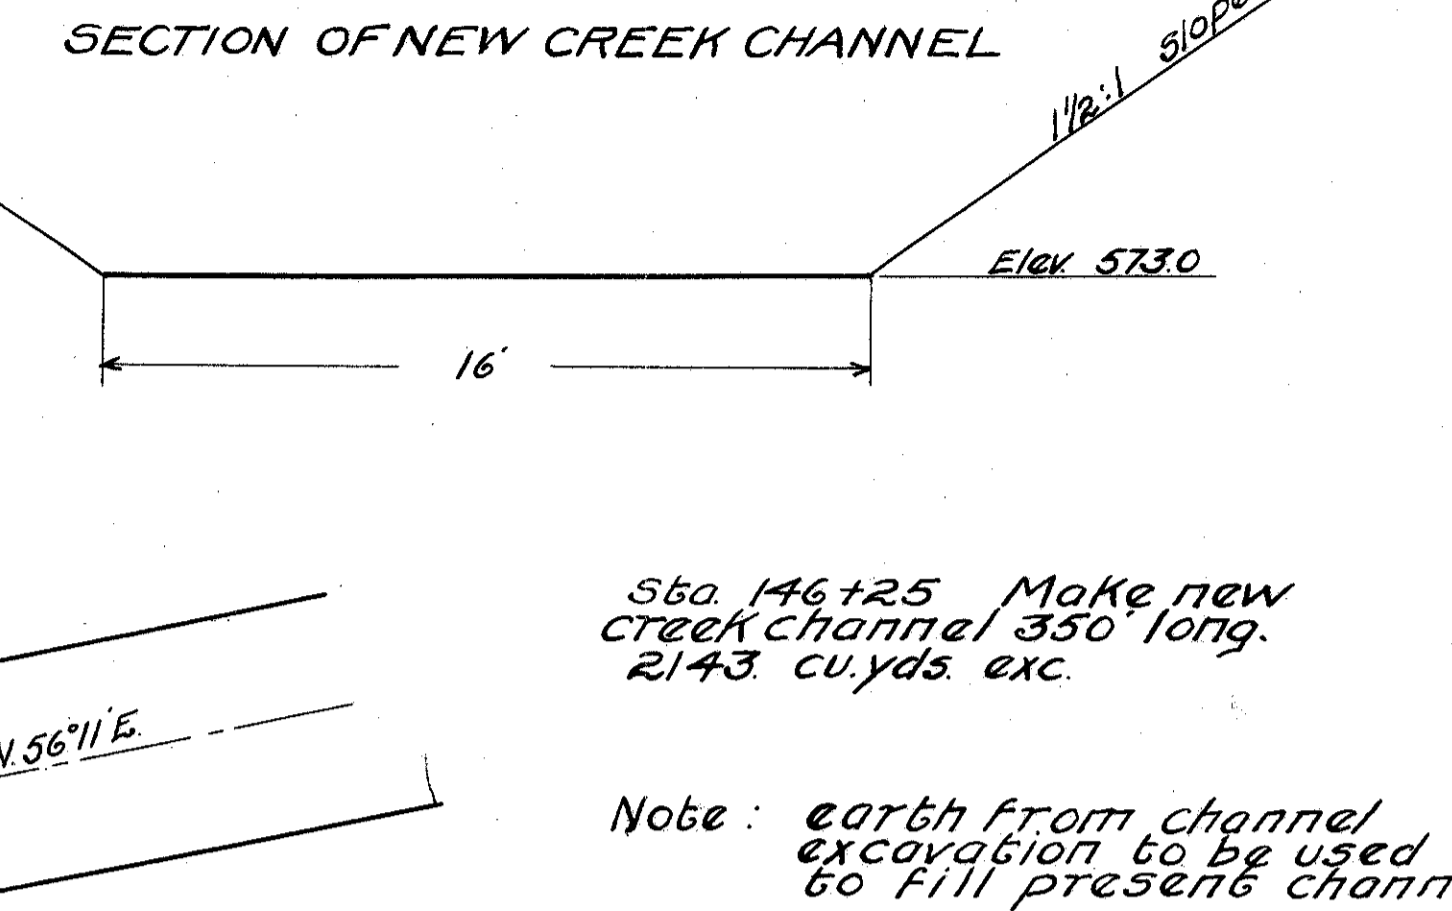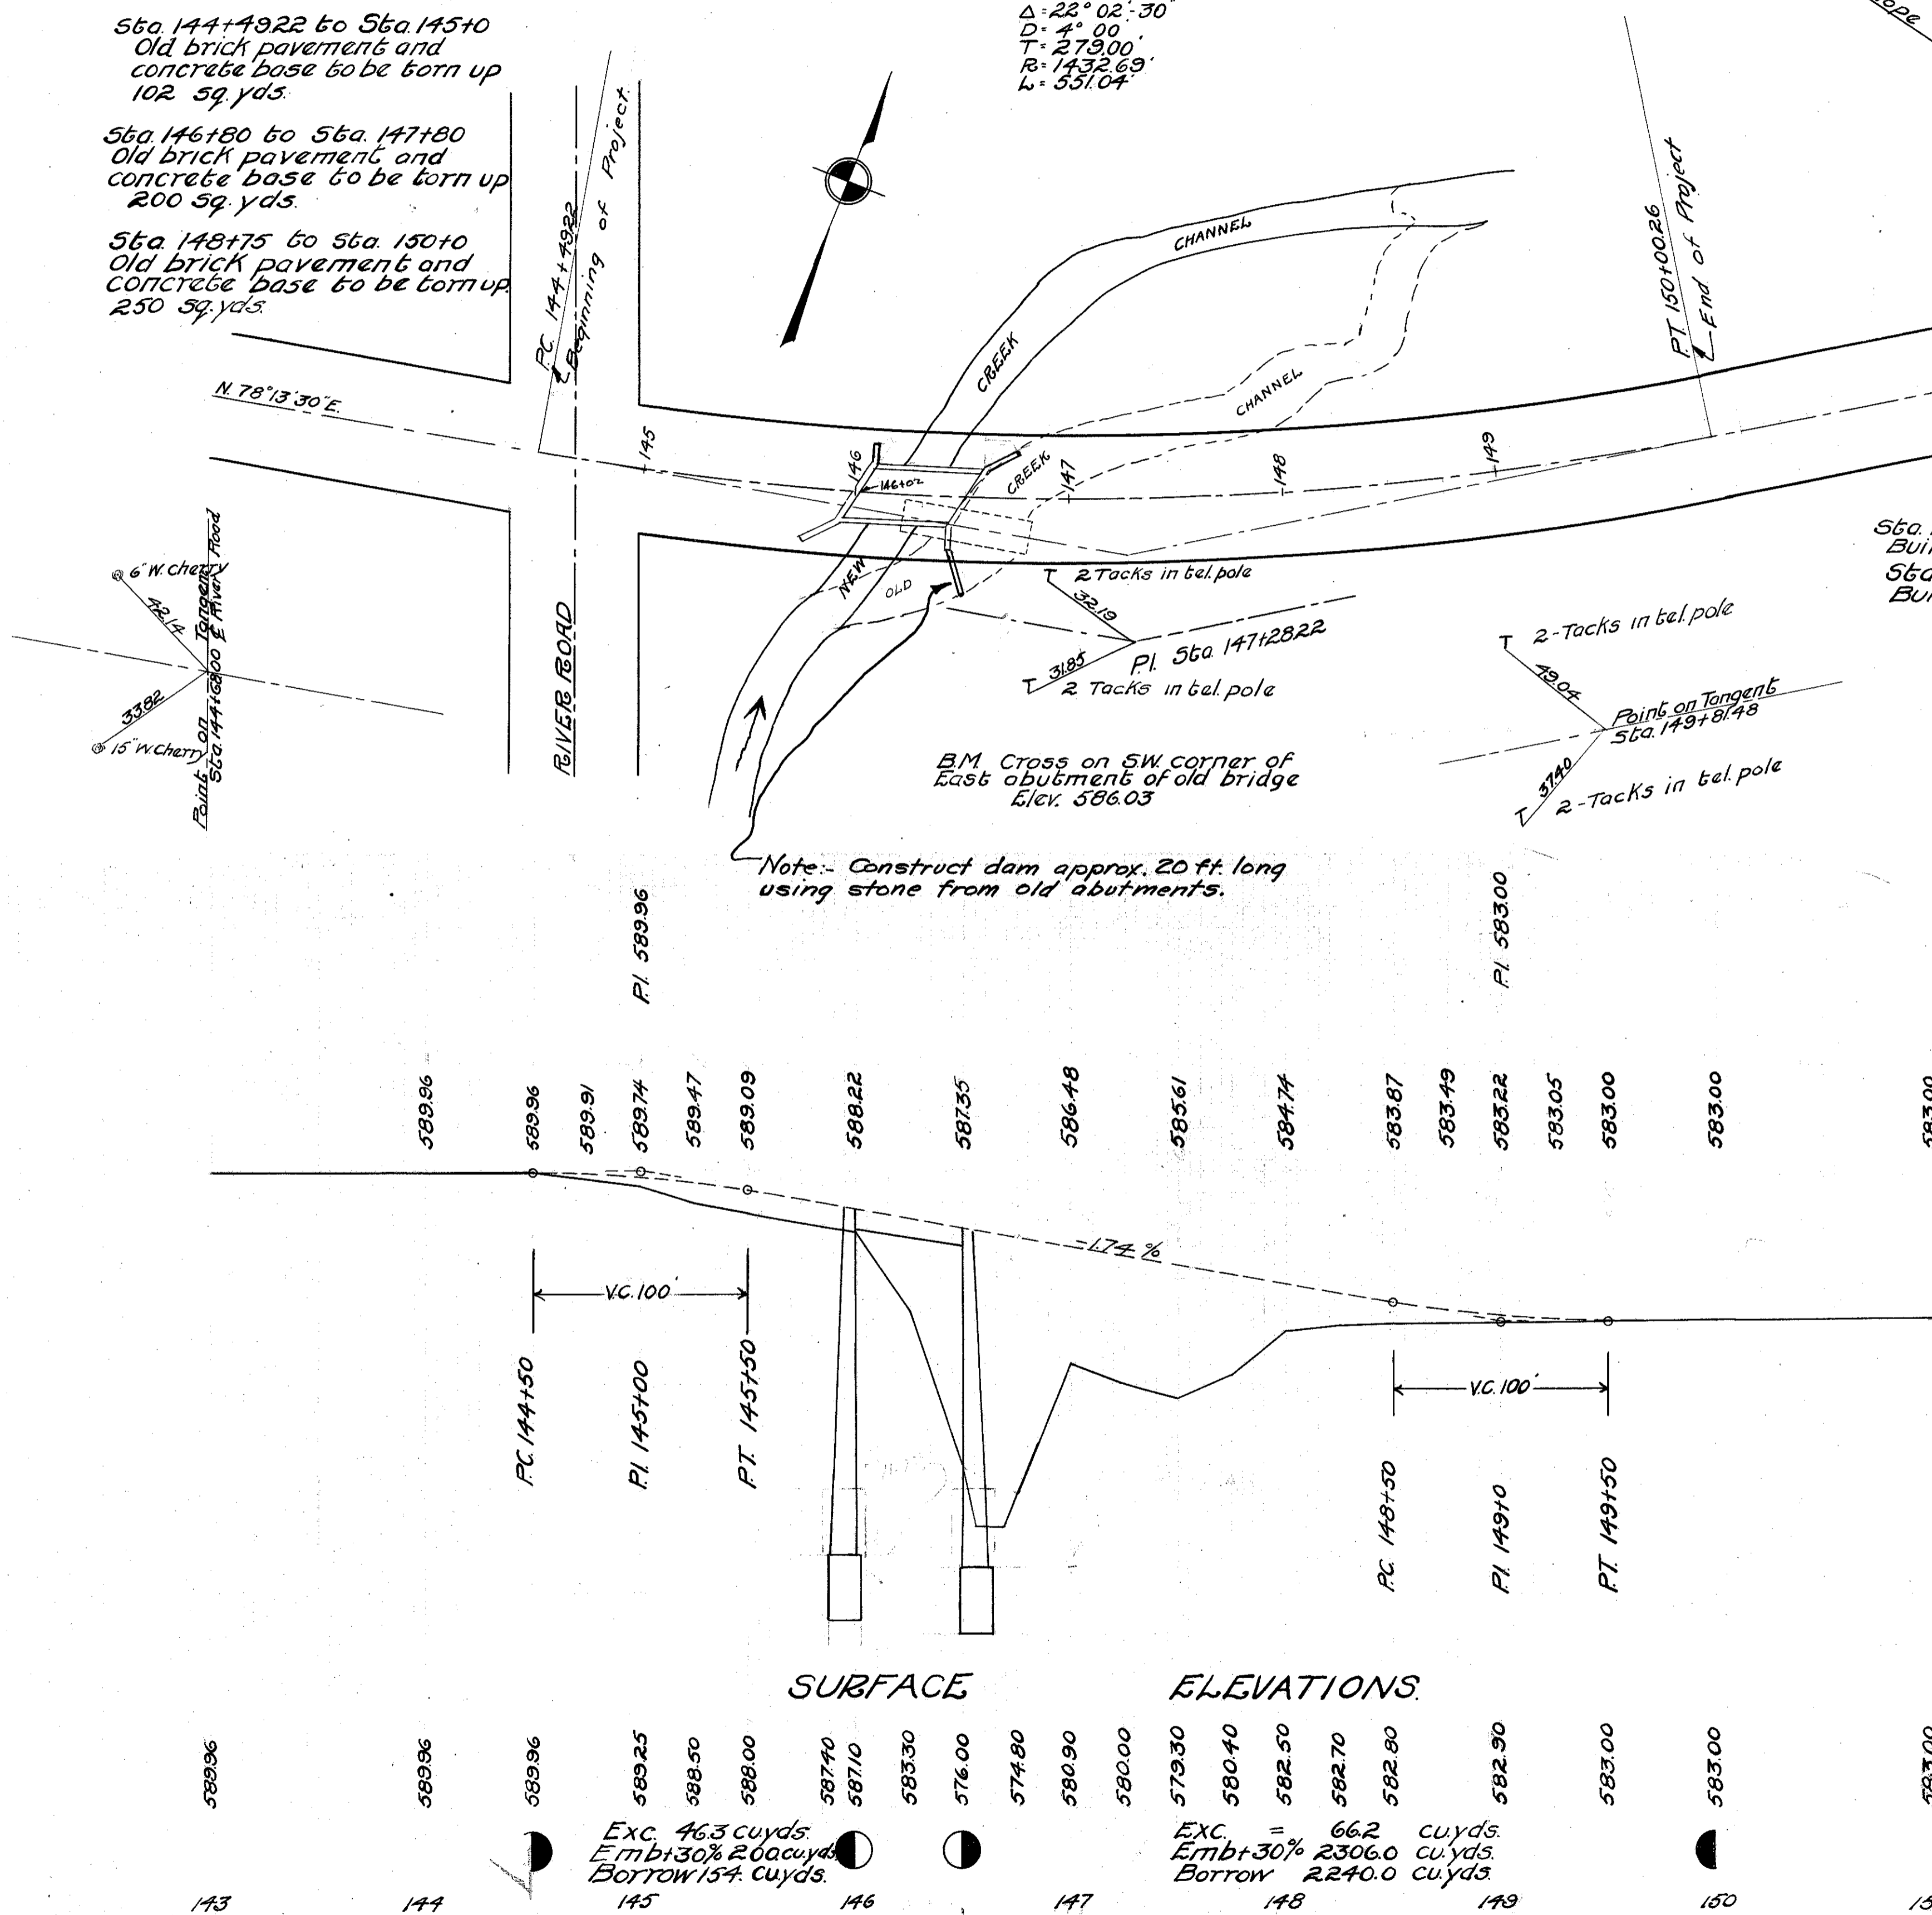

Sta. 146+42 to Sta. 146+82  
Build 40' Type E Guard Rail  
Sta. 146+60 to Sta. 148+0  
Build 140' Type E Guard Rail

Note:- Construct dam approx. 20 ft long using stone from old abutments.