


BR-37-89

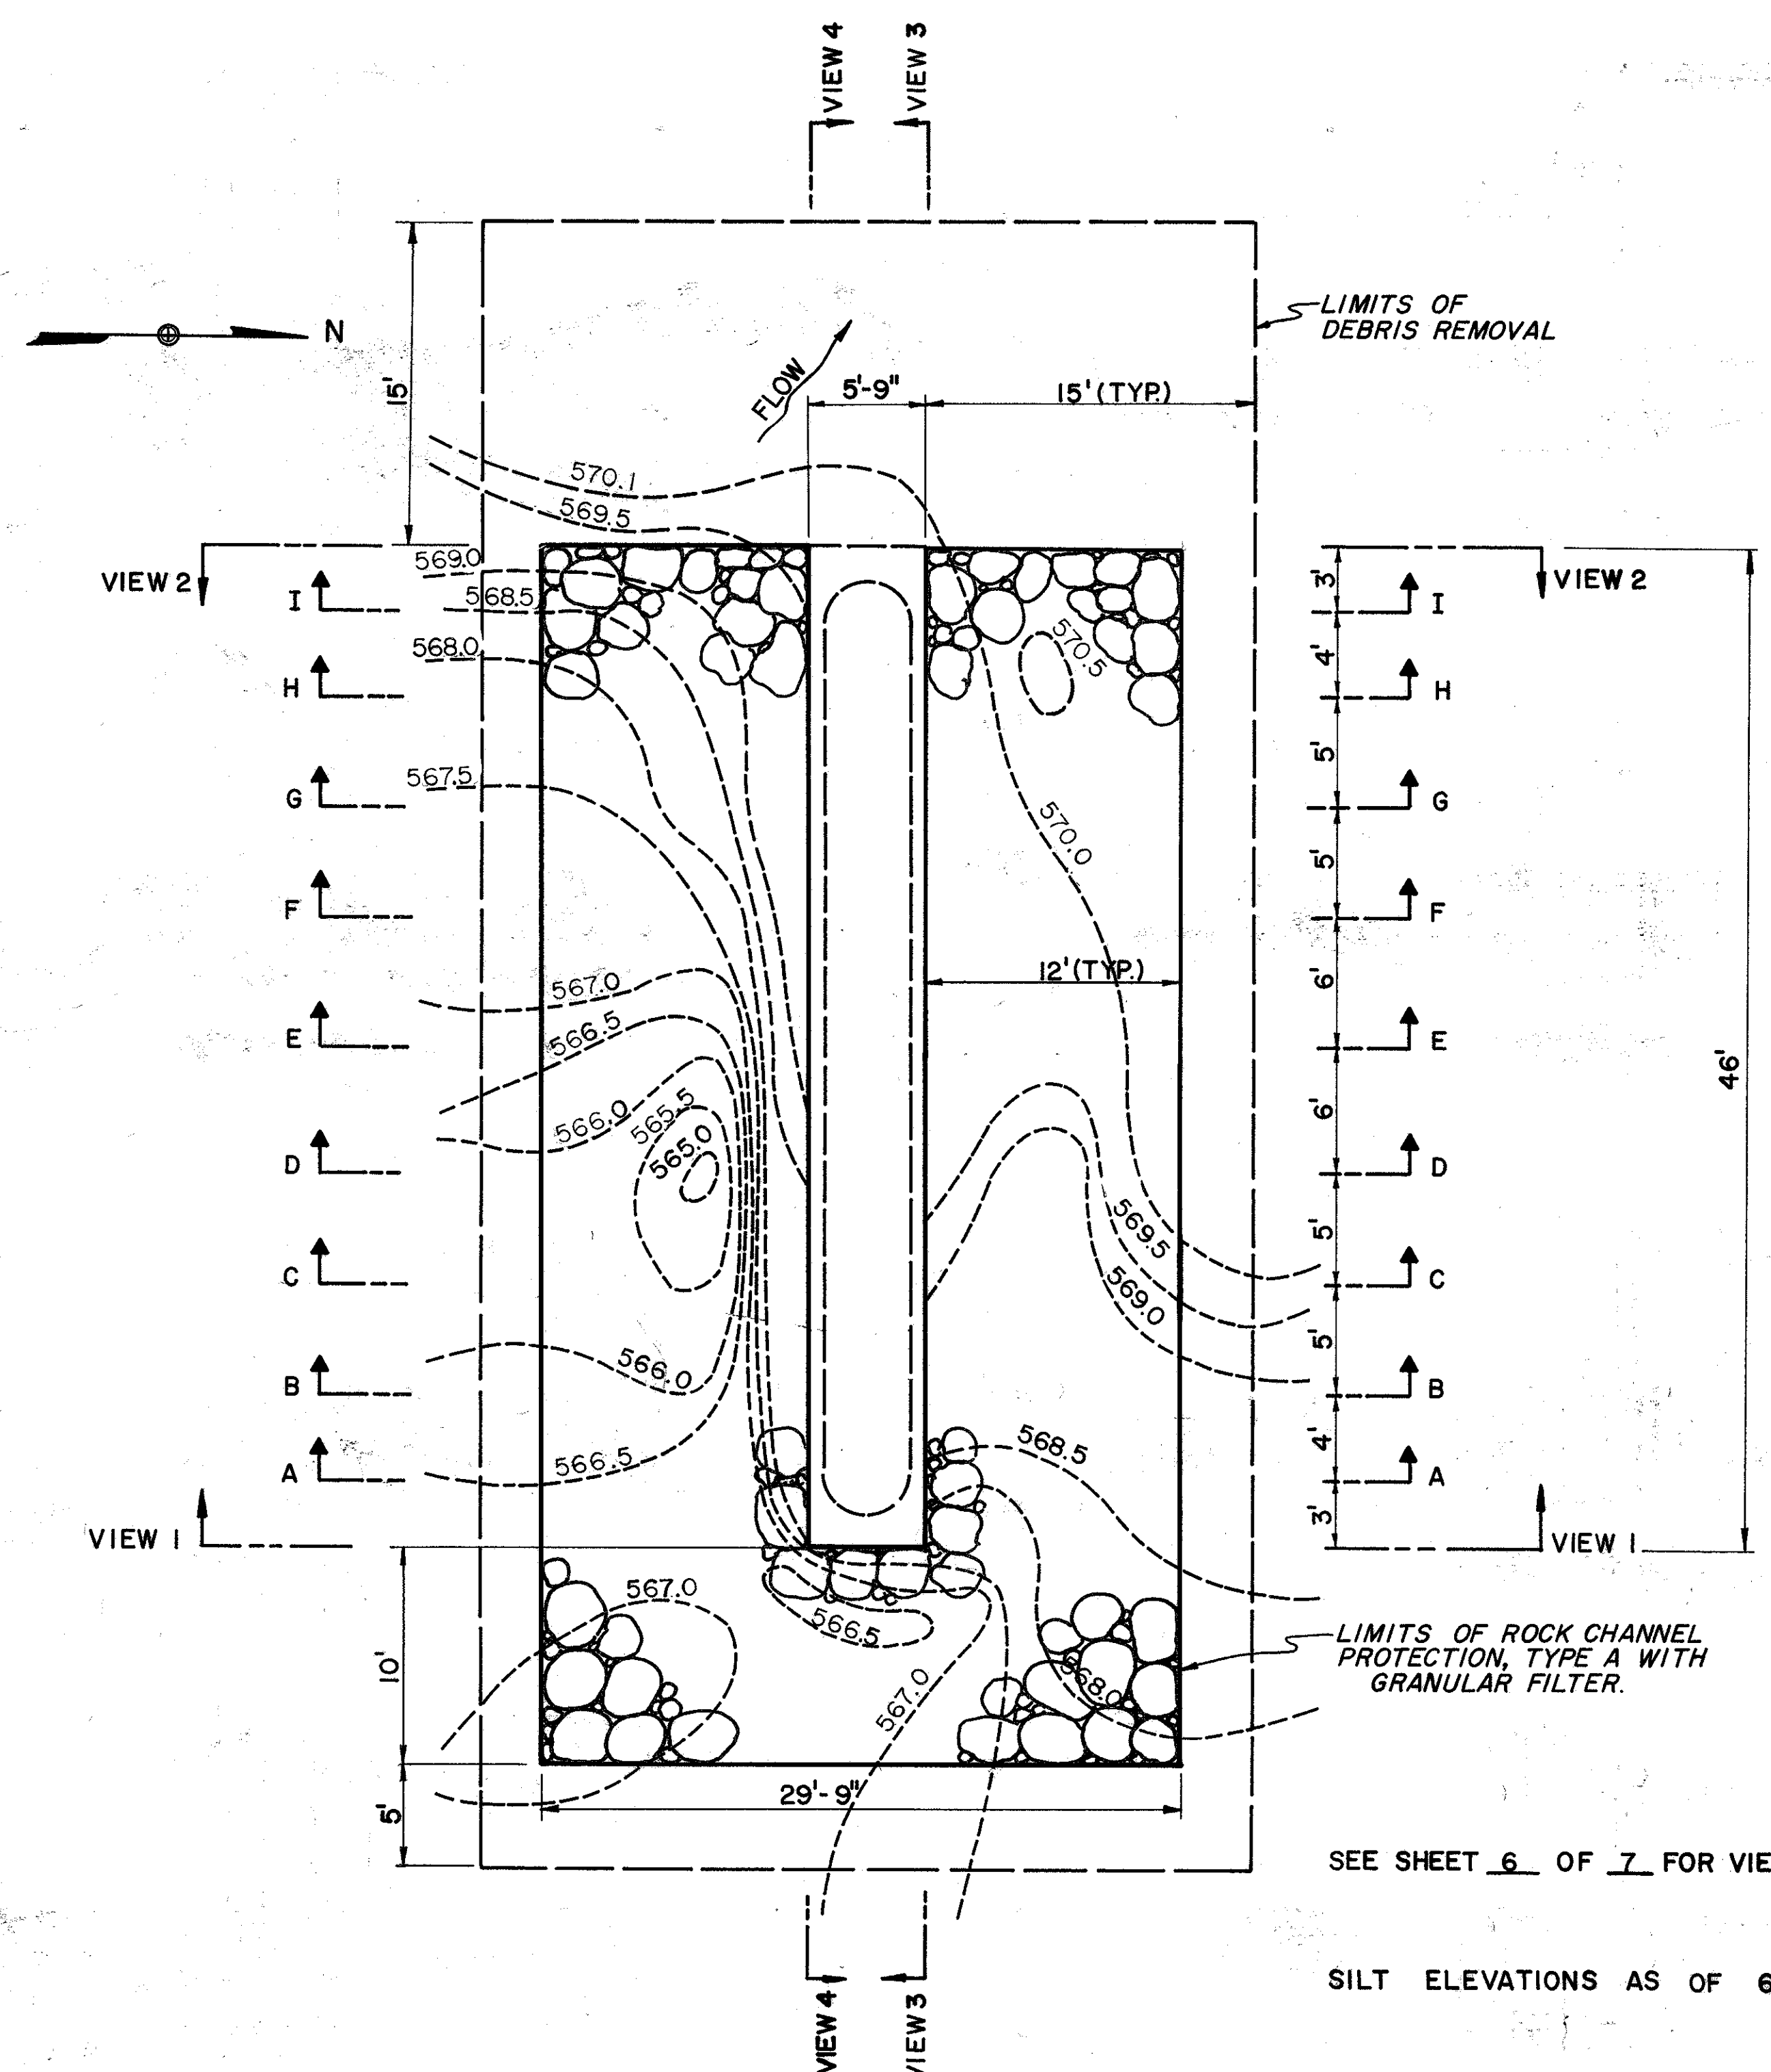

TOP OF FOOTER ELEV. = 569.4
 BOTTOM OF FOOTER ELEV. = 565.9

PLAN VIEW OF PIER NO. 3

SEE SHEET 6 OF 7 FOR VIEWS AND SECTIONS.

SILT ELEVATIONS AS OF 6/23/89.

ESTIMATED QUANTITIES - BR. NO. LAK-283-0472				
ITEM	ITEM EXT.	GRAND TOTAL	UNIT	DESCRIPTION
202		LUMP	SUM	DEBRIS REMOVAL
601		136	CU. YDS.	ROCK CHANNEL PROTECTION, TYPE A, WITH GRANULAR FILTER, AS PER PLAN
614		LUMP	SUM	MAINTAINING TRAFFIC

STATE OF OHIO					5/7
DEPARTMENT OF TRANSPORTATION					
DISTRICT 12 BRIDGE DEPARTMENT					
ESTIMATED QUANTITIES & PLAN VIEW OF PIER NO. 3					
BR. NO. LAK - 283 - 0472 OVER THE CHAGRIN RIVER					
LAKE COUNTY					OHIO
DESIGNED	DRAWN	TRACED	CHECKED	REVIEWED	DATE
BGW	BGW	GLC	GWM	DWL	6/27/89