

NOTES:

OUTLINES

ALL OUTLINES SHALL BE TWO INCHES WIDE UNLESS SHOWN OTHERWISE ON THE LAYOUT.

CORNER RADIUS

CORNER RADIUS SHALL BE GOVERNED BY THE HORIZONTAL WIDTH DIMENSION OR THE VERTICAL DIMENSION OF THE SIGN, WHICHEVER IS SMALLER: UP TO 2½' USE 3" CORNER RADIUS, 3' TO 4½' USE 6" CORNER RADIUS, 5' TO 6½' USE 9" CORNER RADIUS, 7' AND UP USE 12" CORNER RADIUS.

ARROWS

ALL DIAGONAL ARROWS SHALL BE PLACED AT 45° UNLESS SPECIFIED OTHERWISE ON THE LAYOUT DETAILS OF ARROWS A-1, B-1, C-1, A-5, B-5, C-5, ETC. ARE SHOWN ON SIGN DESIGN SHEET IA.

MARKERS

DETAILS OF ROUTE MARKERS SUCH AS M-1C-36-2, M-2C-36-2, M-5C-36-2, ETC. ARE SHOWN ON THE SIGN DESIGN SHEETS HAVING THE CORRESPONDING CODE NUMBERS.





LETTERING

LETTERING SHOWN AS "UC" AND "LC" INDICATES "UPPER CASE INTERSTATE" AND "LOWER CASE INTERSTATE" RESPECTIVELY. LETTERING SHOWN AS "E" INDICATES "E SERIES".


DIMENSIONING

DIMENSIONING SUCH AS SHALL BE INTERPRETED AS BEING ACCUMULATIVE. THE DISTANCE FROM POINT A TO POINT B, IN THIS EXAMPLE, BEING 25 INCHES. ALL DIMENSIONS GIVEN ON THE LAYOUTS ARE IN INCHES UNLESS OTHERWISE SHOWN.

FED. RD. DIVISION	STATE	PROJECT
2	OHIO	LAK-2-002

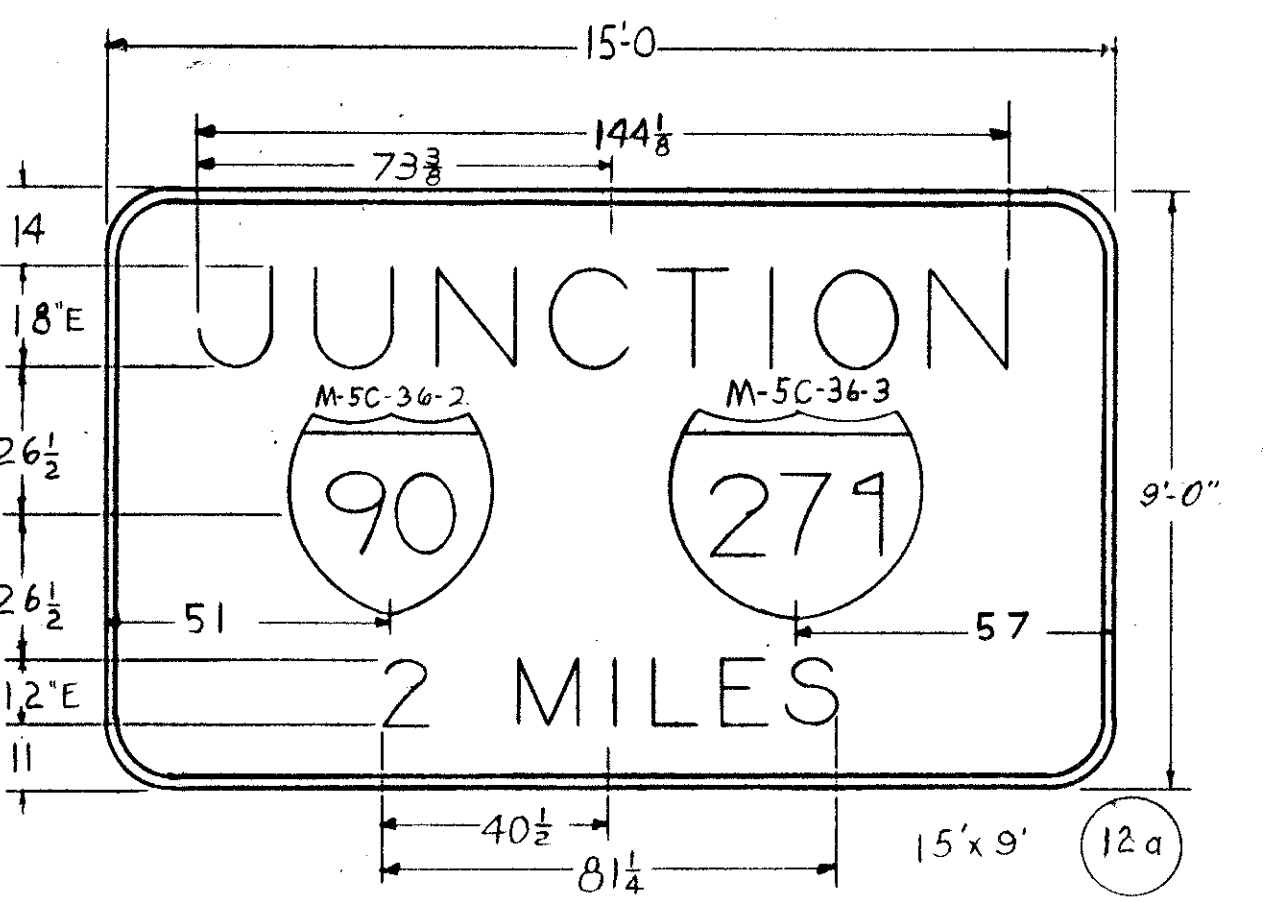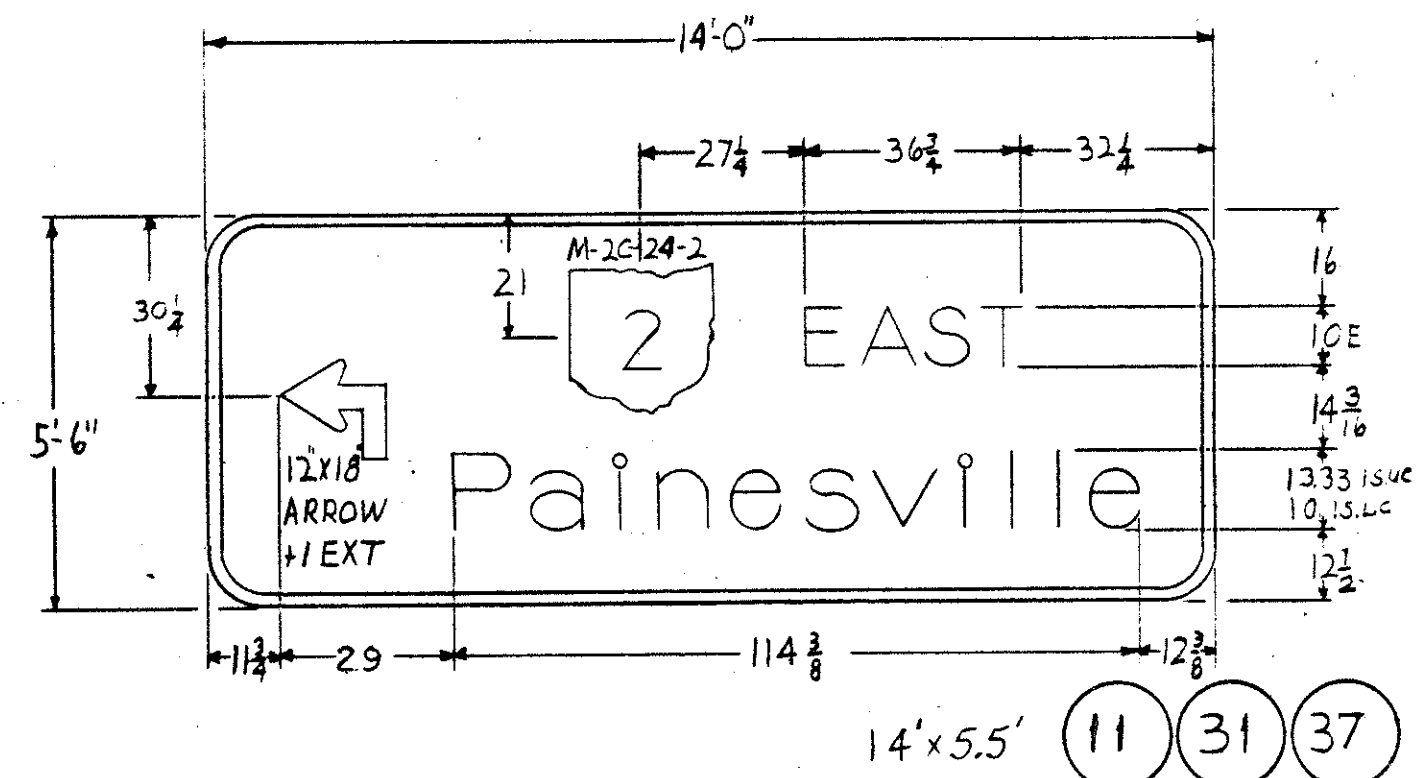
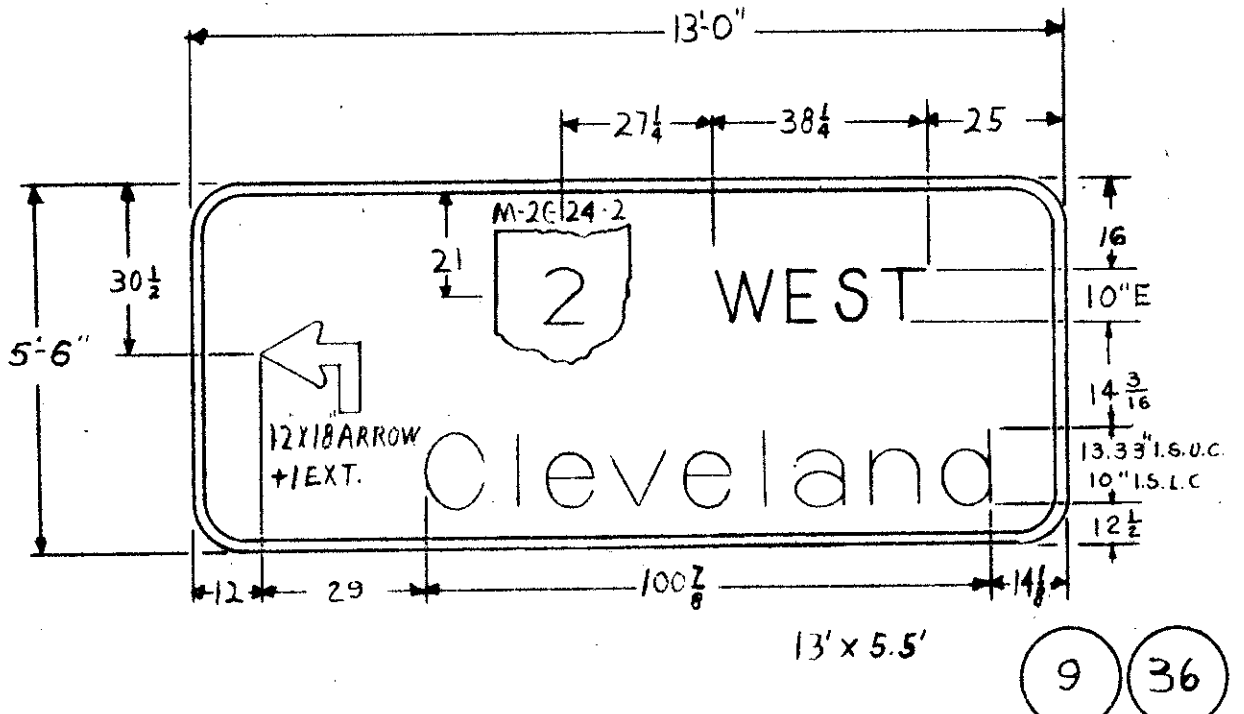
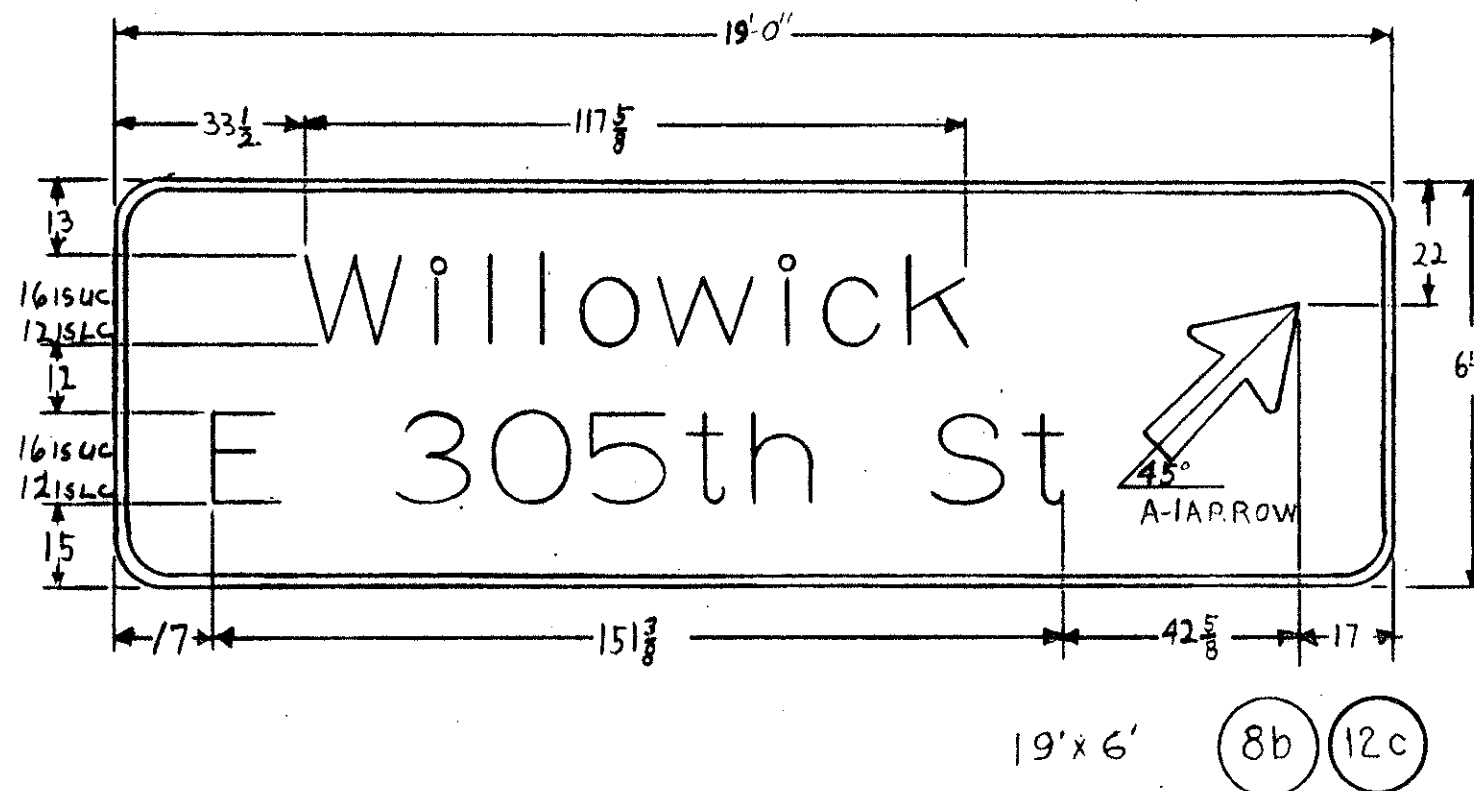


SEE SIGN DESIGN SHEET D-3B-24-0 10

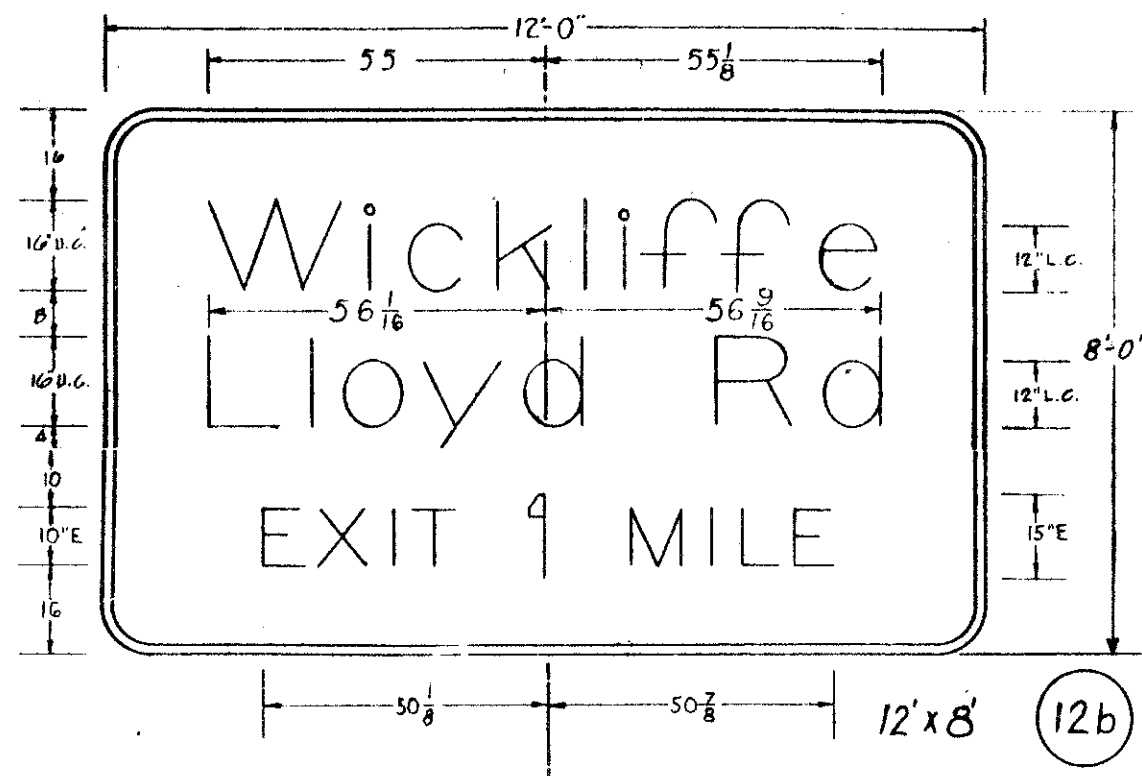

SEE DESIGN NO. 8B 12c

SEE DESIGN NO. 7 13

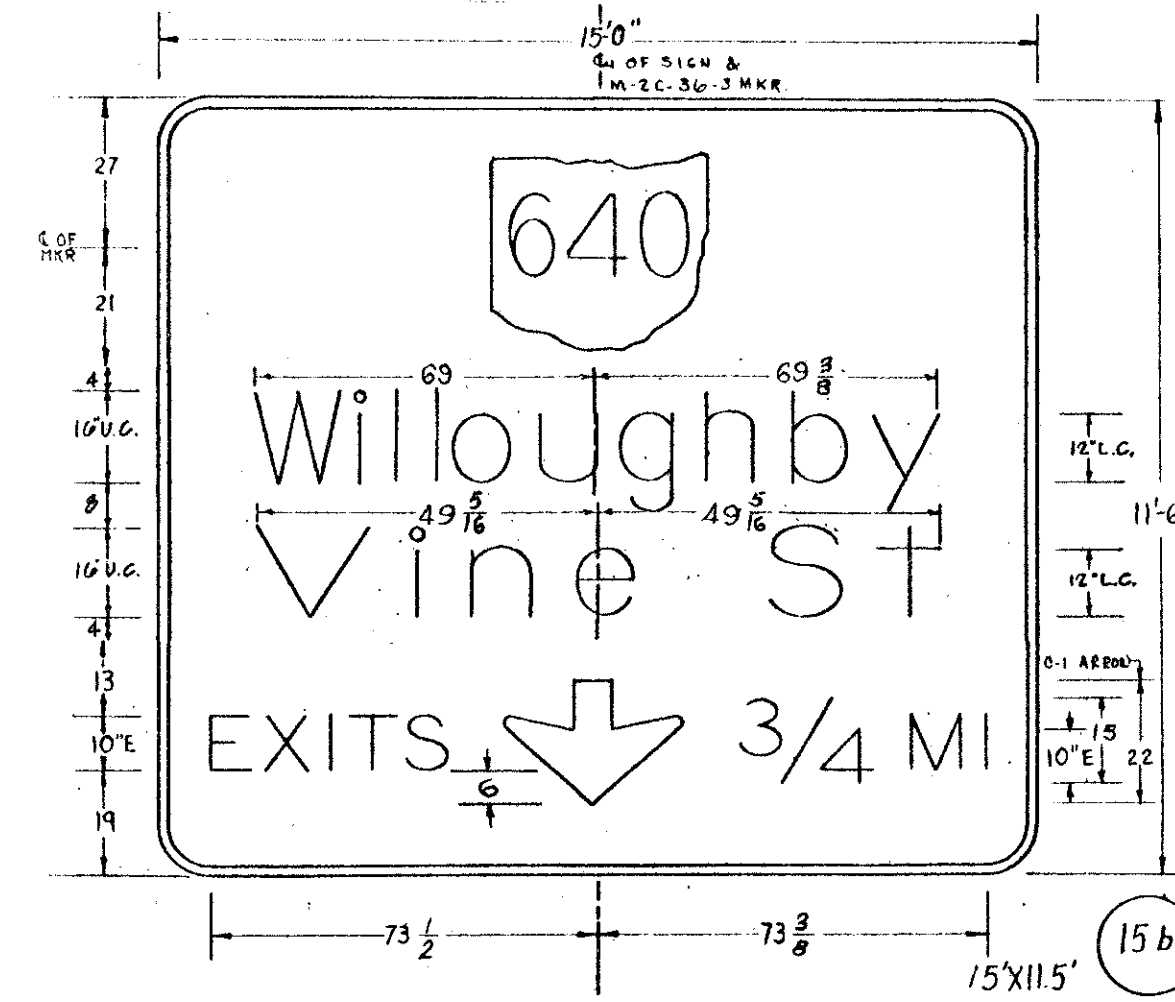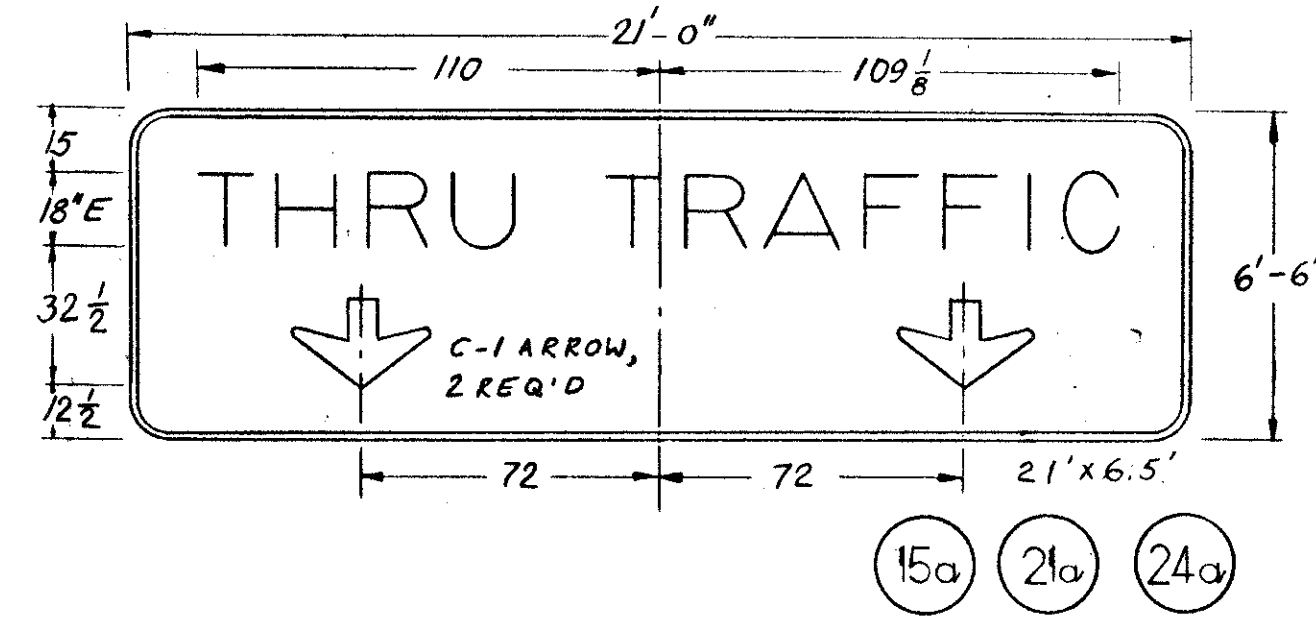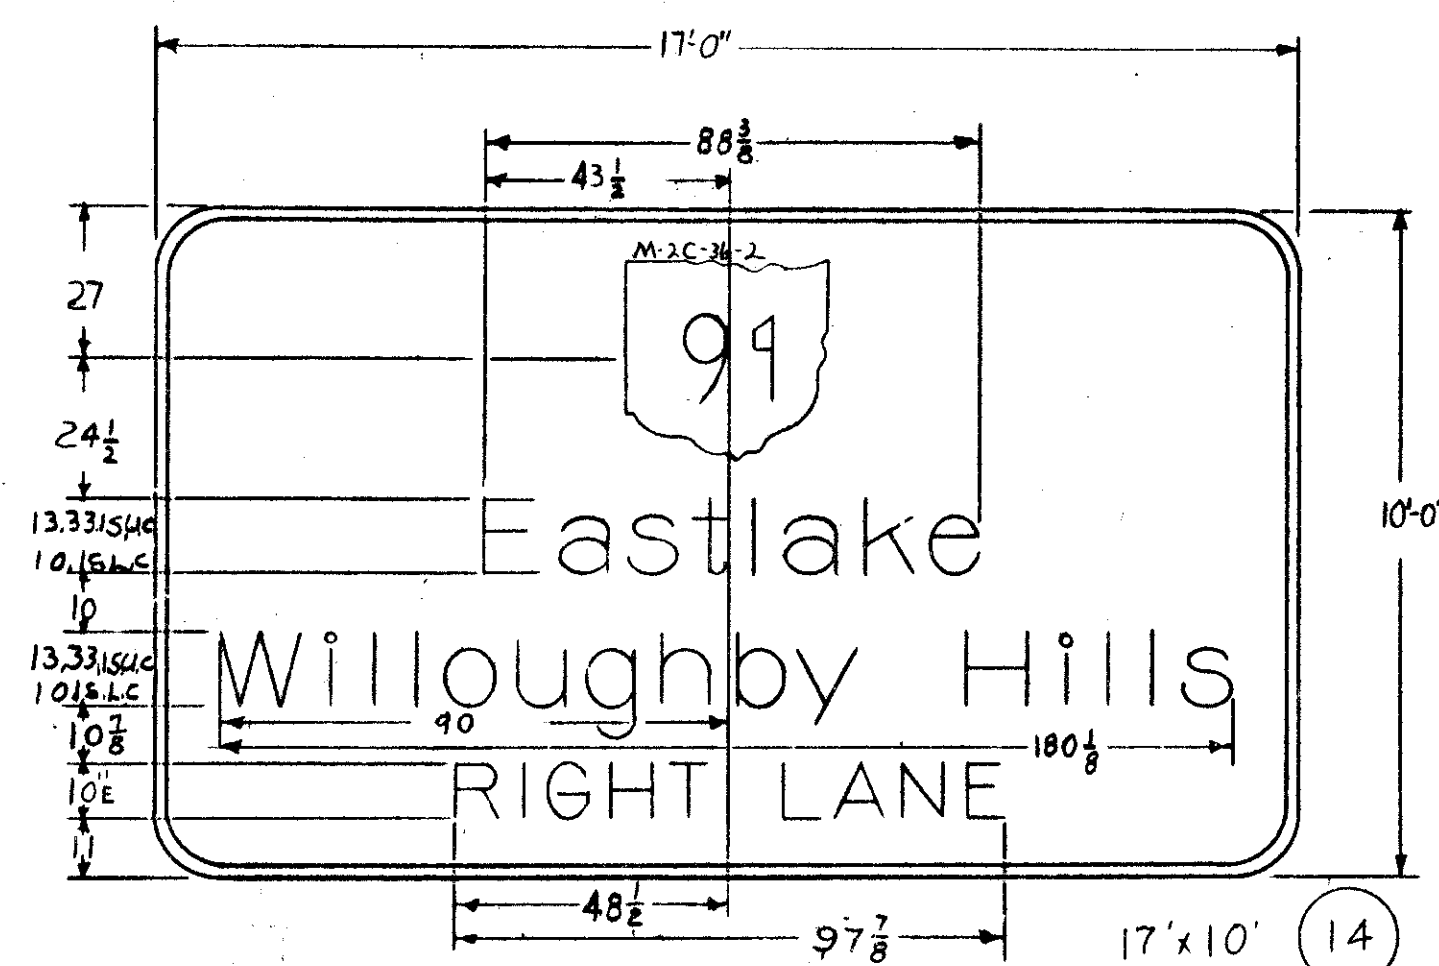

W	17.25	i	5.00	I	3.25	l	6.12	l	6.13	o	3.25	w	16.50	i	3.25	C	10.25	K	5.00		16" U.C. 12" L.C. LENGTH 117 5/8		
E	12.37	3	20.38	O	13.00	5	4.37	t	7.37	T	3.88		3.37		7.50	21.00	S	13.12	t	3.25	7.50	16" U.C. 12" L.C. LENGTH 151 3/8	
W	9.37	F	3.37	S	6.75	T	2.62															10"E LENGTH 38 1/4	
C	10.62	l	4.50	e	4.00	V	8.62	e	4.25	l	4.00	d	8.62	n	5.13	d	4.00					13.33 U.C. 10" L.C. LENGTH 100 7/8	
	6.75	A	2.50	S	9.00	T	2.37															10"E LENGTH 36 3/4	
P	9.75	d	3.25	i	5.12	V	8.50	e	2.87	s	8.62	v	10.62	l	3.75	i	5.12	l	2.62				13.33 U.C. 10" L.C. LENGTH 114 3/8

U	13.00	U	8.12	N	13.88	G	8.12	T	13.88	I	6.25	O	14.38	N	6.25							18"E LENGTH 144 1/8
																						12"E LENGTH 81 1/4
																						16" U.C. 12" L.C. LENGTH 112 5/8
																						10"E 15"E (l) LENGTH 101
																						13.33 U.C. 10" L.C. LENGTH 88 3/8
																						cont. LENGTH below
																						13.33 U.C. 10" L.C. LENGTH 180 1/8
																						10"E LENGTH 97.86
																						18"E LENGTH 219 1/8
																						16" U.C. 12" L.C. LENGTH 98 3/8
																						10"E LENGTH 146 7/8
																						16" U.C. 12" L.C. LENGTH 138 3/8
																						16" U.C. 12" L.C. LENGTH 110 1/8