


LAKE COUNTY
LAK-306-4.74

QUANTITY CALCULATIONS
BY: JZ DATE 2/25/81
CHKD: DA DATE 3/10/81
COLPETZER - WOODS CONSULTANTS

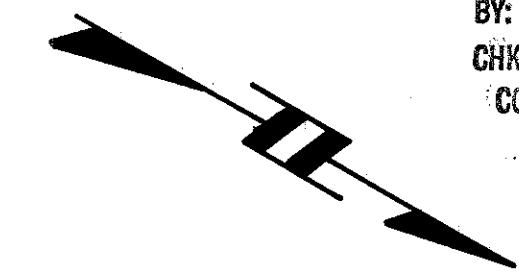


REMOVAL OF TRAFFIC SIGNAL INSTALLATION SUMMARY

1.) STATE ROUTE 306 & LAKELAND COLLEGE DRIVE

DESCRIPTION	LOCATION	SHEET N ^o
STRAIN POLE & FOUNDATION	STA. 260+48-43' RT.	55
CONTROLLER AND FOUNDATION	STA. 261+30-39' RT.	"
PULL BOX	STA. 258+80-40' RT.	"
"	STA. 259+95-42' RT.	"
"	STA. 260+26-43' RT.	"
"	STA. 260+73-48' RT.	"
"	STA. 261+30-45' LT.	"
"	STA. 262+20-36' LT.	"
"	STA. 263+30-34' LT.	56
"	STA. 264+50-36' LT.	"
"	STA. 265+65-65' LT.	"
"	STA. 266+86-40' LT.	"
"	STA. 268+00-34' LT.	"
3/4" G.I.P. CONDUIT	STA. 258+80-STA. 260+73	55
1 1/2" G.I.P. CONDUIT	STA. 261+30-STA. 263+00	"
"	STA. 263+00-STA. 268+00	56
"	STA. 268+00-STA. 269+32	57
MESSENGER WIRE, SIGNAL HEADS, & WIRING	S.R. 306 & COLLEGE DR.	55

2.) STATE ROUTE 306 & I-90 RAMPS "C" & "D"

DESCRIPTION	LOCATION	SHEET N ^o
CONTROLLER AND FOUNDATION	STA. 272+85-73' LT.	58
1 1/2" G.I.P. CONDUIT	STA. 272+73-STA. 272+85	"
"	STA. 272+85-STA. 272+96	"
"	STA. 272+96-STA. 273+25	"
MESSENGER WIRE, SIGNAL HEADS & WIRING	S.R. 306 & RAMPS "C" & "D"	"

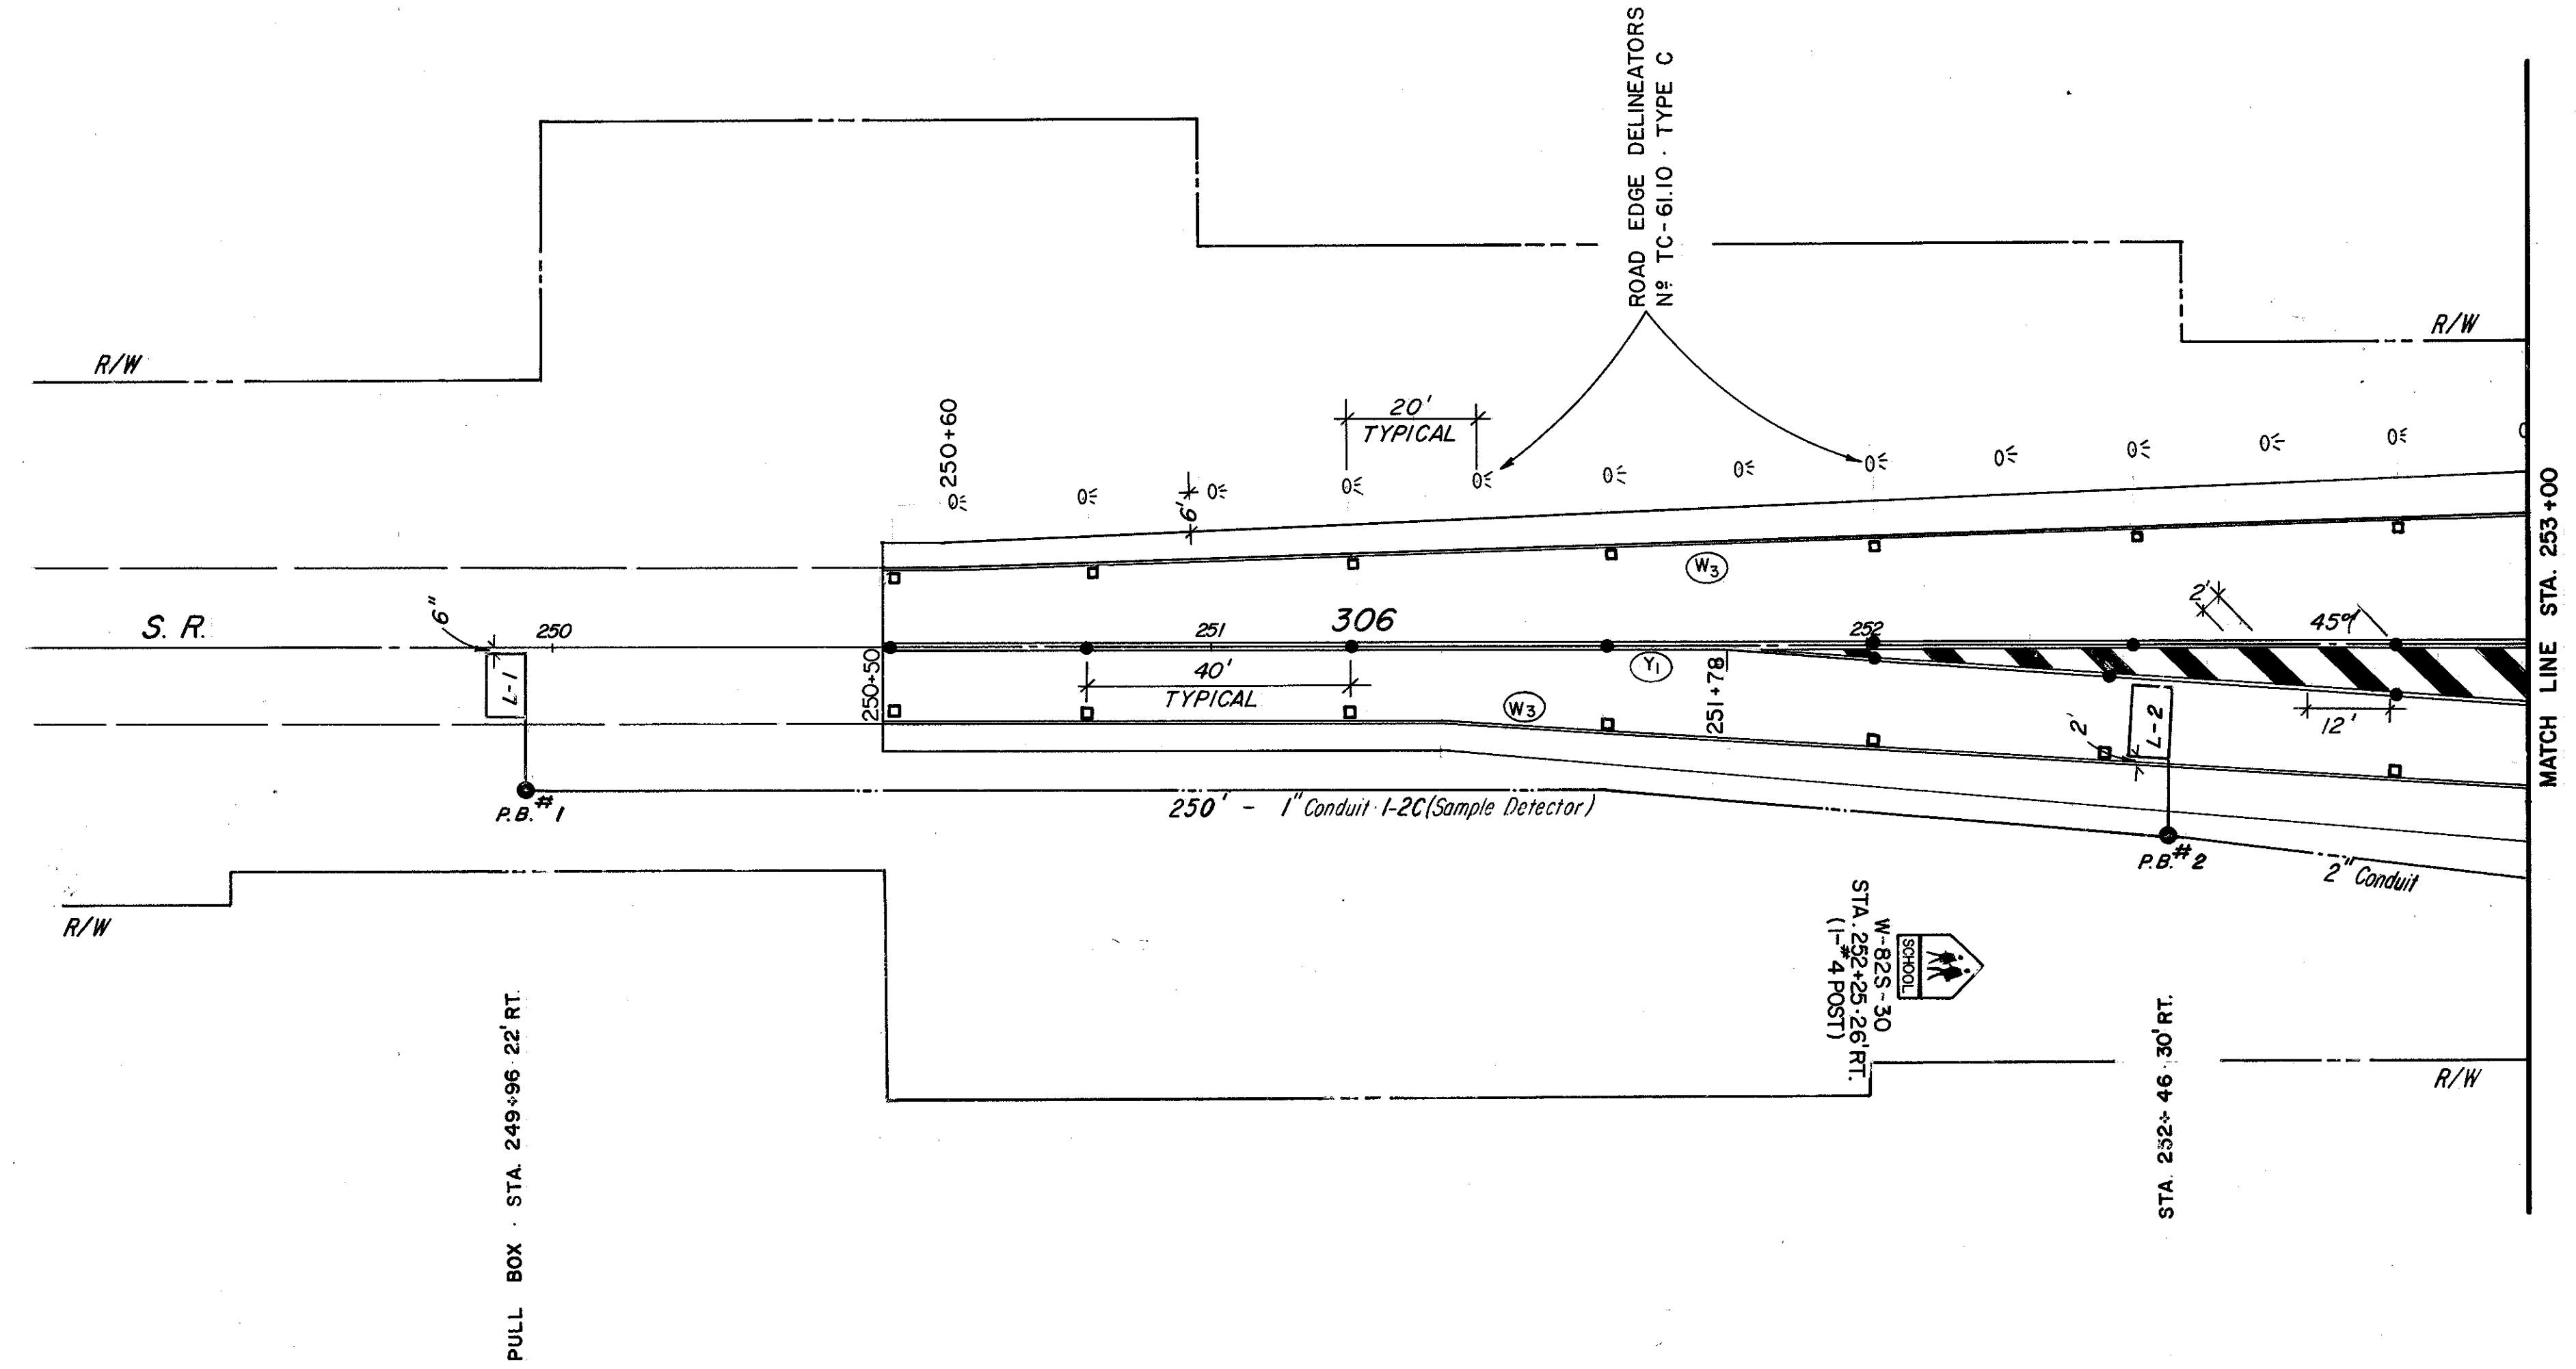

NOTE: ALL RAISED PAVEMENT MARKERS SHOWN ON THIS SHEET ARE AT 40' SPACING.

RAISED PAVEMENT MARKER SUBSUMMARY TABLE

SHEET N ^o	1-WAY MARKER		2-WAY MARKER			
	WHITE	YELLOW	WHITE/WHITE	YELLOW/YELLOW	WHITE/RED	YELLOW/RED
53	14			10		
54	50			25	9	
55	53			32	16	
56	39			28	14	
57	25			36	12	
58	24			27	13	
59	37			16		
SUBTOTAL	242	0	0	174	64	0
GRAND TOTAL	480					

PAVEMENT MARKING LEGEND

	24" BROAD TRANSVERSE LINES
	4" WHITE LANE LINE (10' LONG W/30' GAPS)
	8" WHITE CHANNELIZING LINE
	24" STOP LINE
	4" DOUBLE YELLOW CENTERLINE (4" APART)
	4" WHITE EDGE LINE
	LANE ARROWS
	2 WAY RAISED MARKER - YELLOW/YELLOW
	2 WAY RAISED MARKER - WHITE/WHITE
	1 WAY RAISED MARKER - WHITE

COLPETZER - WOODS CONSULTANTS INC.
MENTOR, OHIO

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION

DESIGNED	DRAWN	TRACED	CHECKED	REVIEW DATE	REVISED