


LAKE COUNTY
LAK-306-615



CALC: PCB 11-78
CHK: ROB 12-78

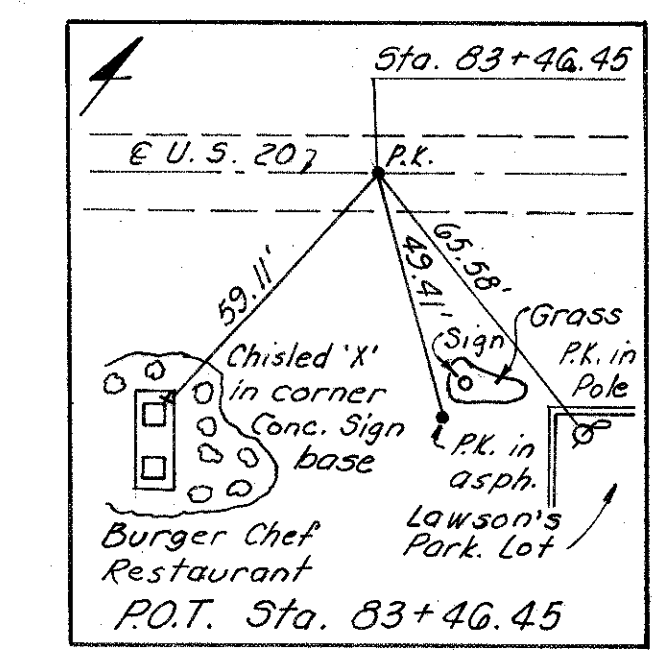

NOTE
1. FOR PAVEMENT DETAIL SEE SHEET 29.

CALCULATIONS
1-R ITEM 202 (14x5) = 710 SF.
2-R ITEM 202 (18.5x4+9) = 389 SF.
SEEDING 1/2(6+2)68+9 = 30 SF.

LEGEND
 ITEM 202 PAVEMENT REMOVED
 ITEM 452 8" PORTLAND CEMENT CONCRETE

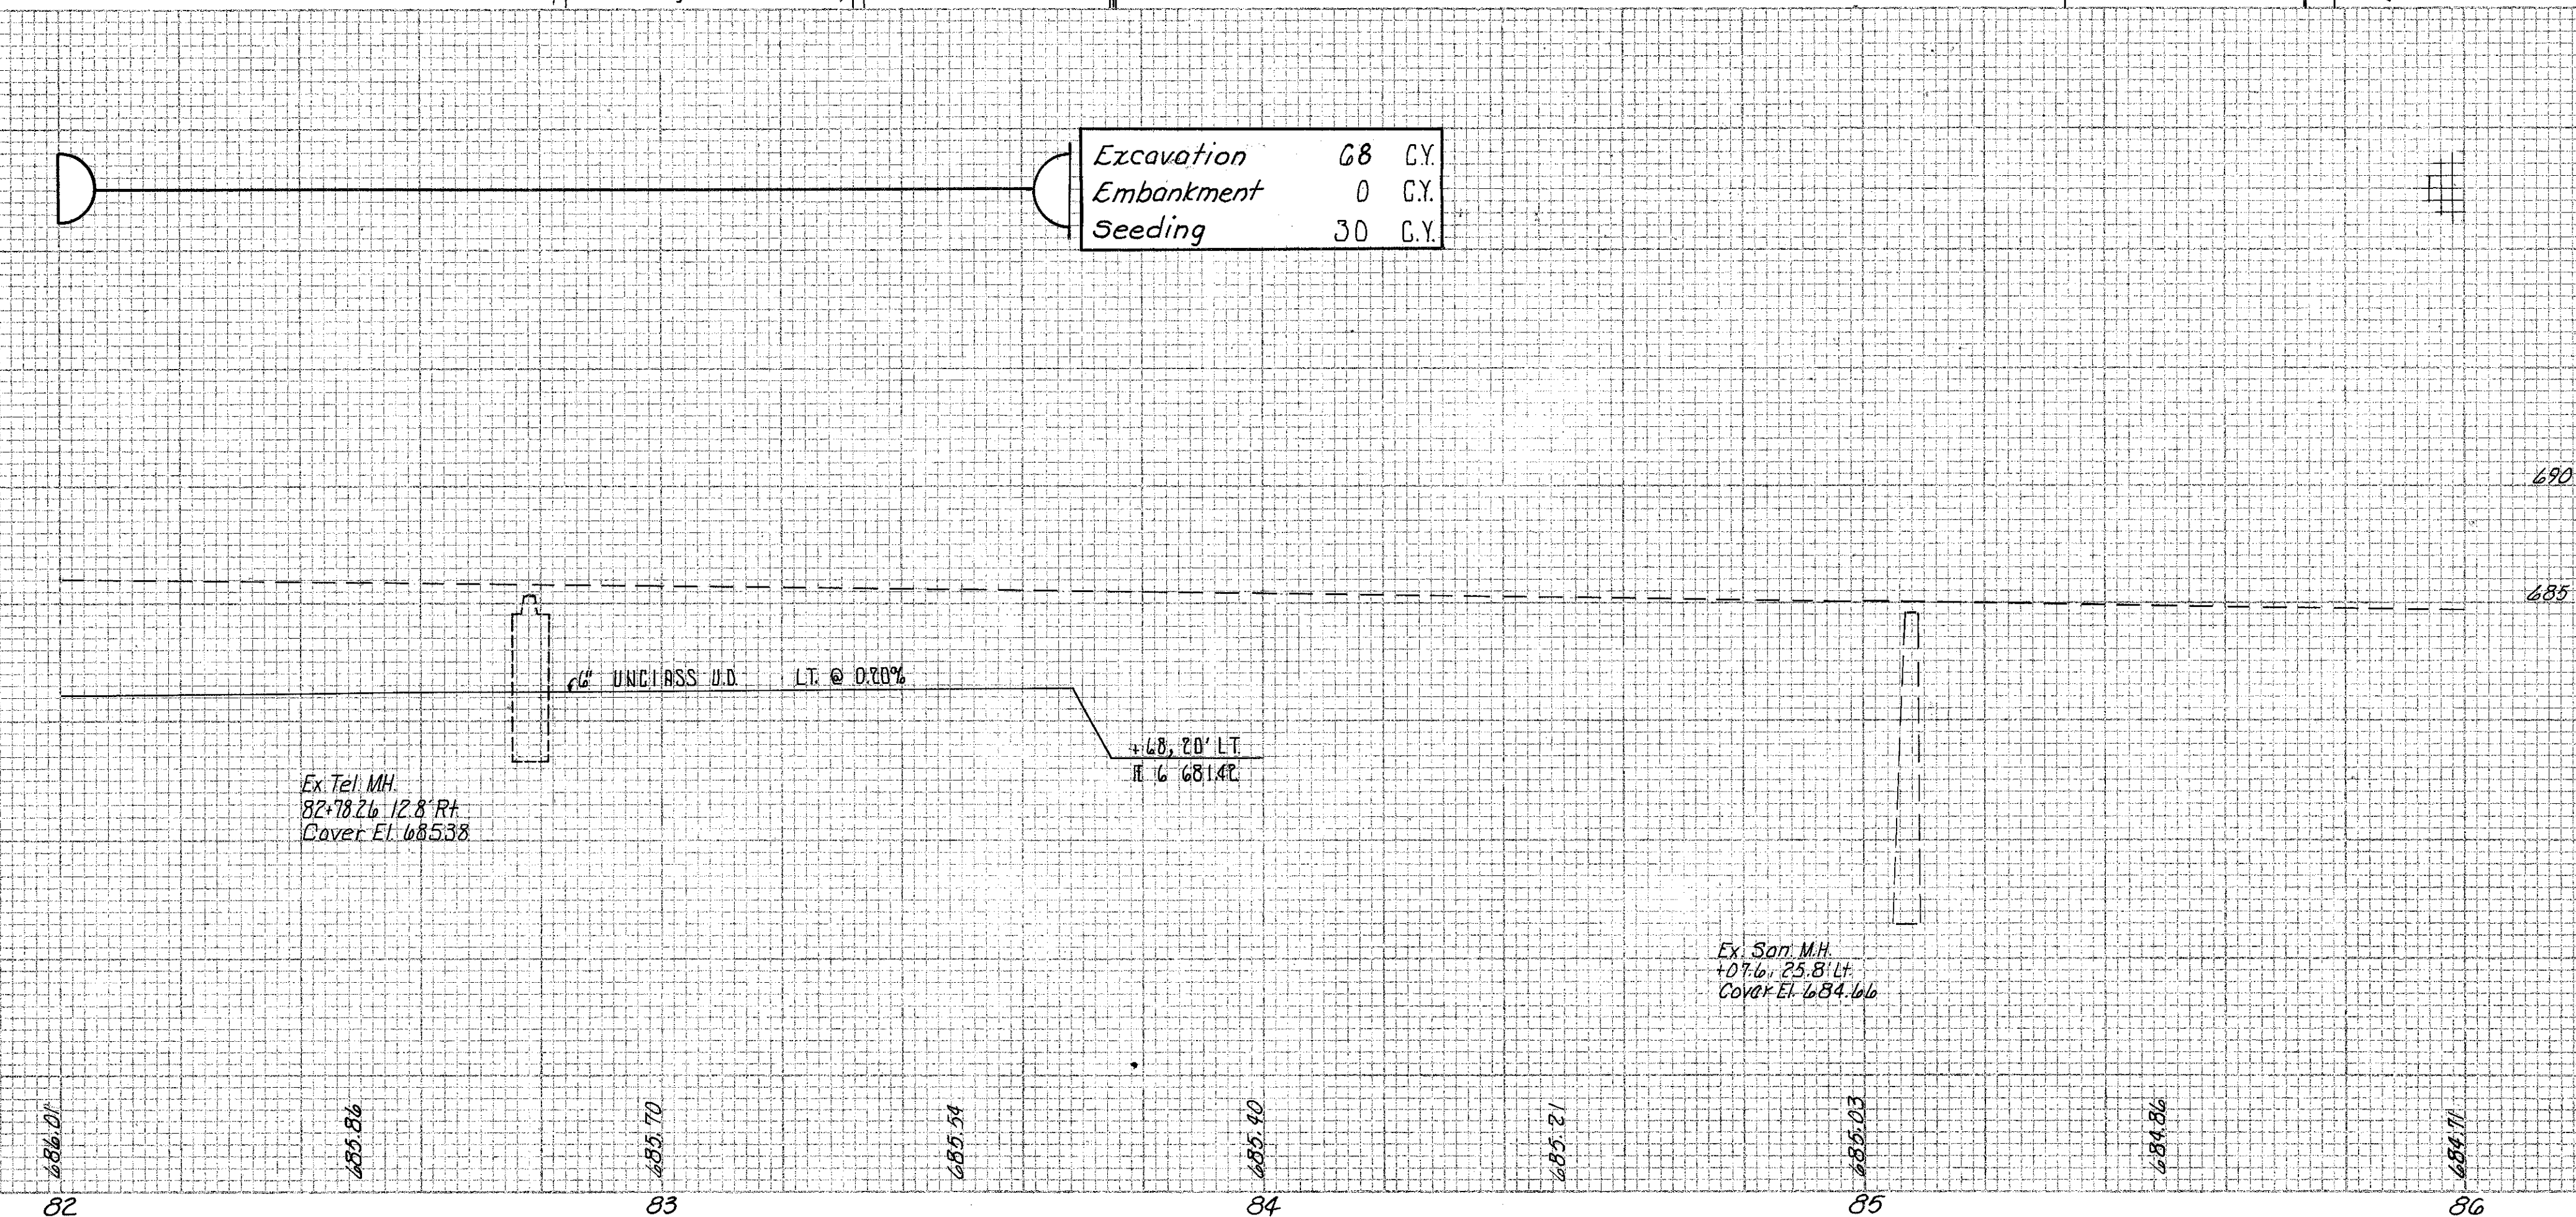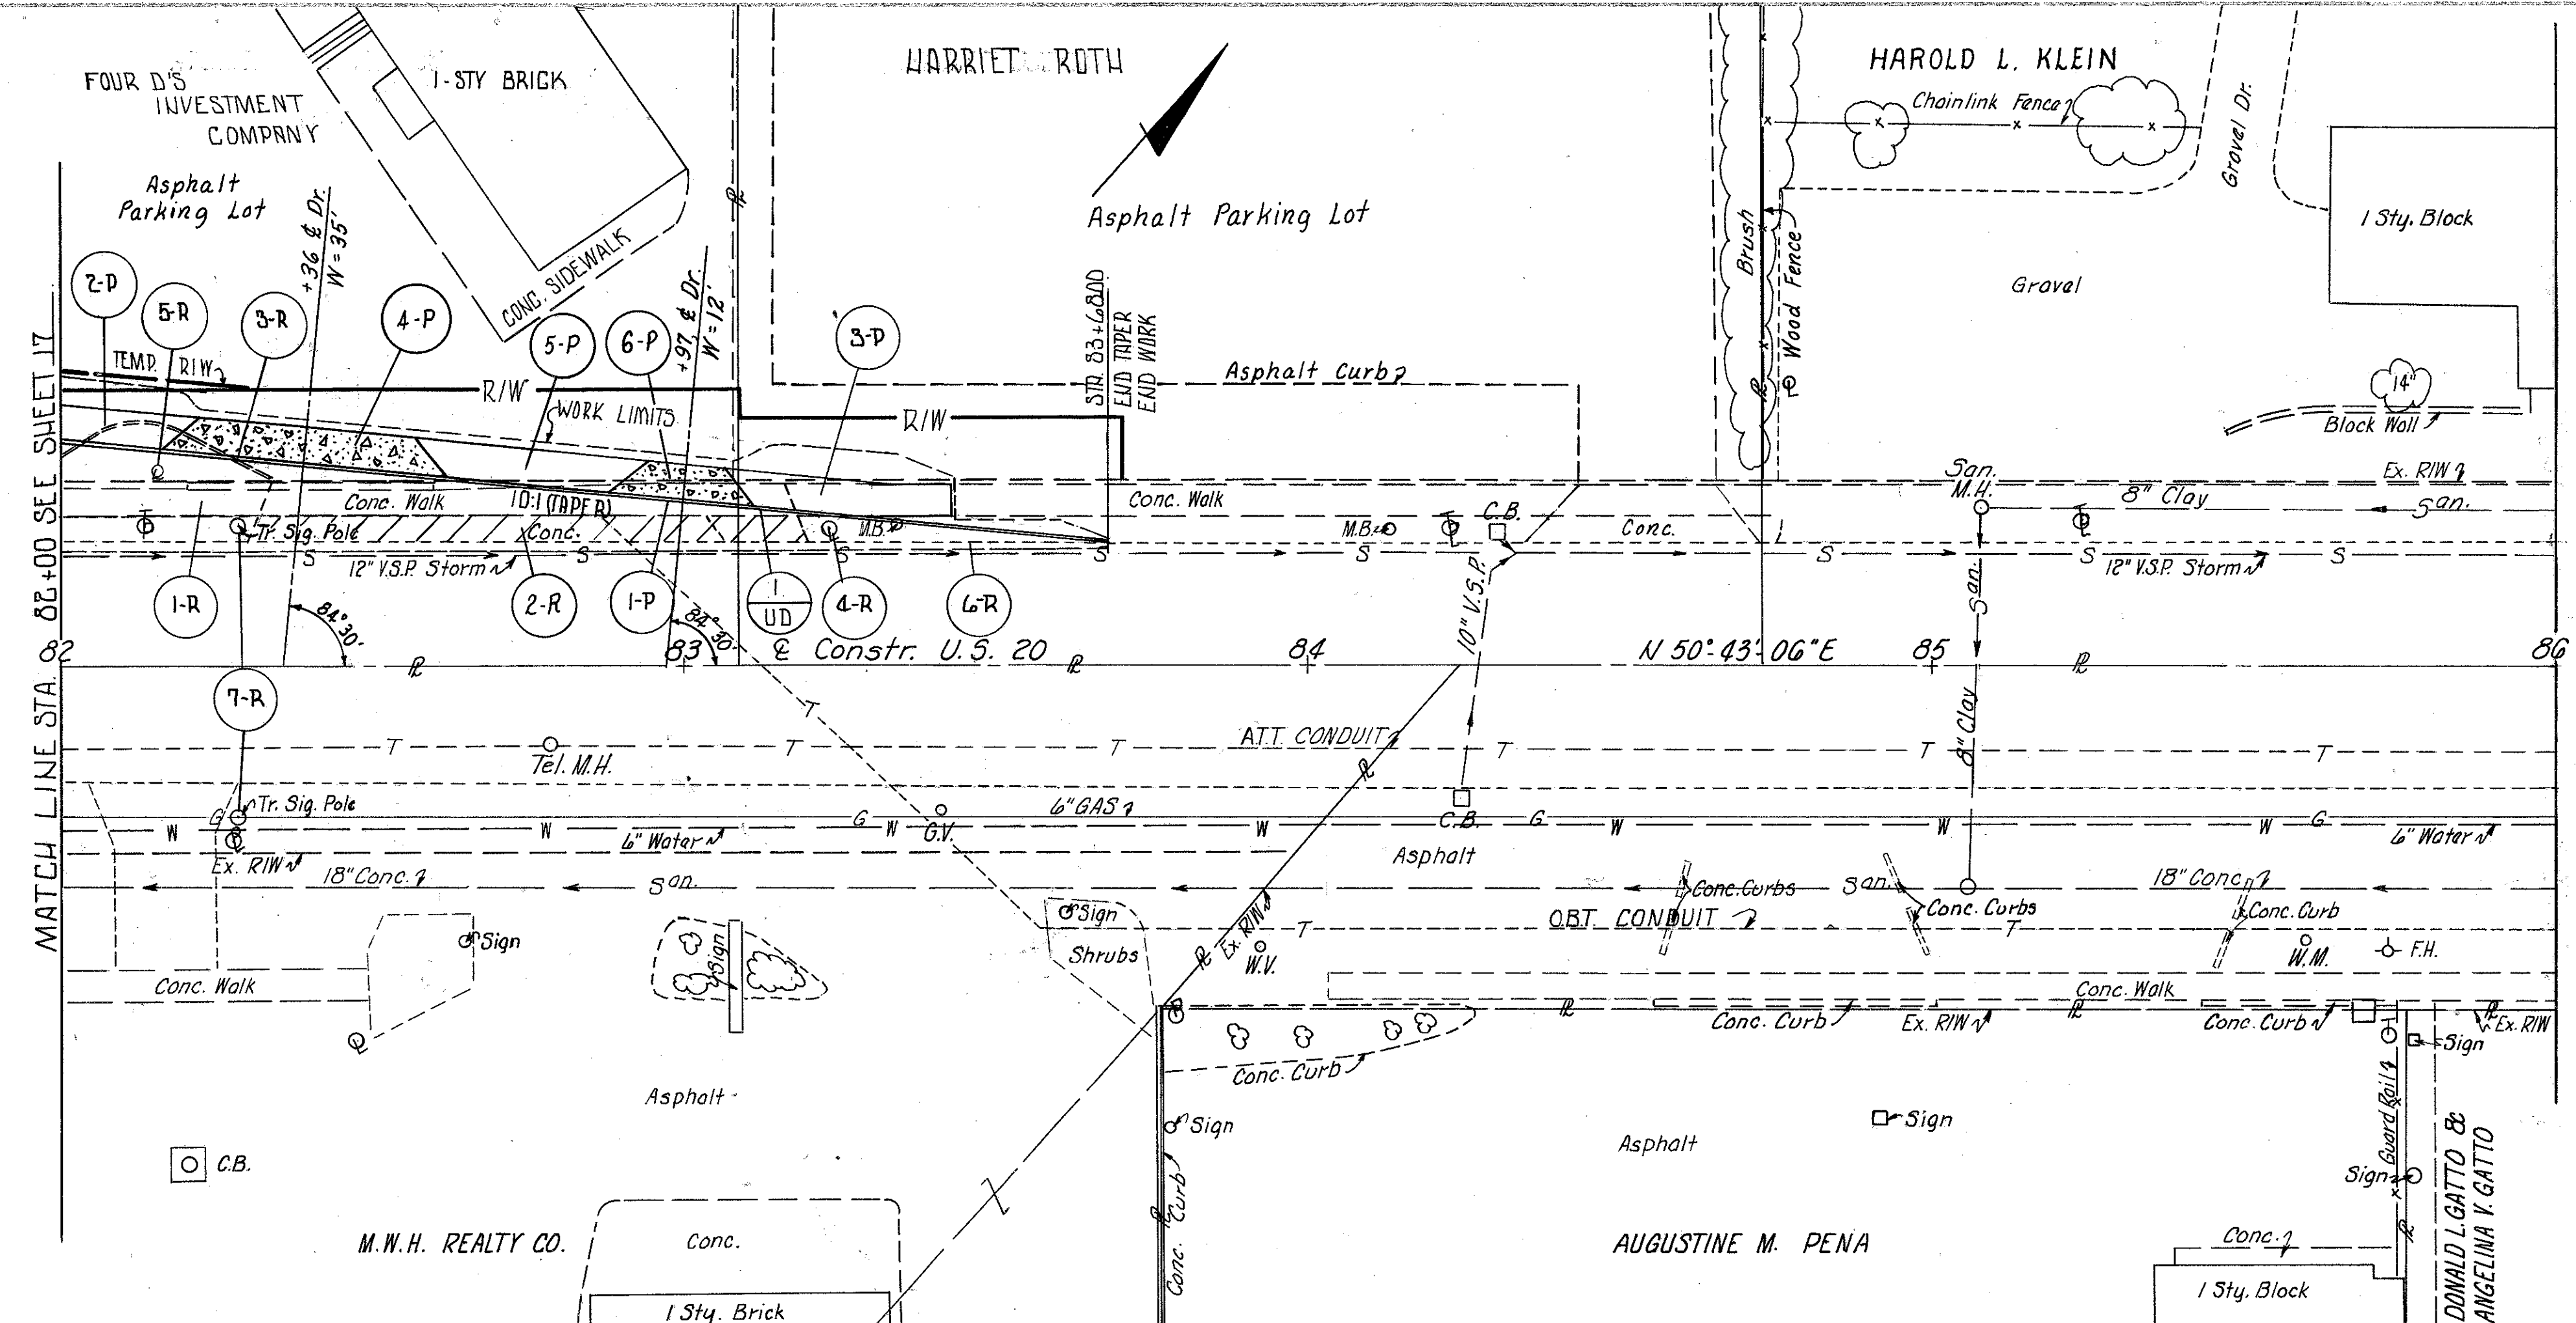

| | | |
|------------|----|------|
| Excavation | 68 | G.Y. |
| Embankment | 0 | G.Y. |
| Seeding | 30 | G.Y. |

| Ref. | Station to Station | Side | 202 | 202 | 202 | 202 | 202 | 605 | |
|--------|--------------------|-------|------------------|--------------|--------------|-----------------------|------------------------------|----------------------------|--|
| | | | PAVEMENT REMOVED | WALK REMOVED | CURB REMOVED | CURB & GUTTER REMOVED | CONCRETE FOUNDATIONS REMOVED | 6" UNCLASS PIPE UNDERDRAIN | |
| | | | S.Y. | S.F. | L.F. | L.F. | E.A. | L.F. | |
| 1-R | 82+00 TO 83+42 | LT. | | 710 | | | | | |
| 2-R | 82+30 TO 83+20 | LT. | 39 | | | | | | |
| 3-R | 82+00 TO 82+35 | LT. | | | 38 | | | | |
| 4-R | 83+23 | LT. | | | | | 1 | | |
| 5-R | 82+15 | LT. | | | | | 1 | | |
| 6-R | 82+00 TO 83+68 | LT. | | | | 168 | | | |
| 7-R | 82+28 | LT&RT | | | | | 2 | | |
| 1-UD | 82+00 TO 83+68 | LT. | | | | | | 168 | |
| TOTALS | | | 39 | 710 | 38 | 168 | 4 | 168 | |