




NOTE:  
MINIMUM VERTICAL SIGN CLEARANCE IS 17 FEET FOR OVERHEAD SIGN SUPPORTS AND 7 FEET FROM THE OUTSIDE EDGE OF PAVEMENT FOR CUT SECTIONS AND 5.0 FROM THE GROUND FOR FILL SECTIONS FOR GROUND MOUNTED SIGNS. ACTUAL VERTICAL SIGN CLEARANCE IS SHOWN IN THE ELEVATION VIEW.

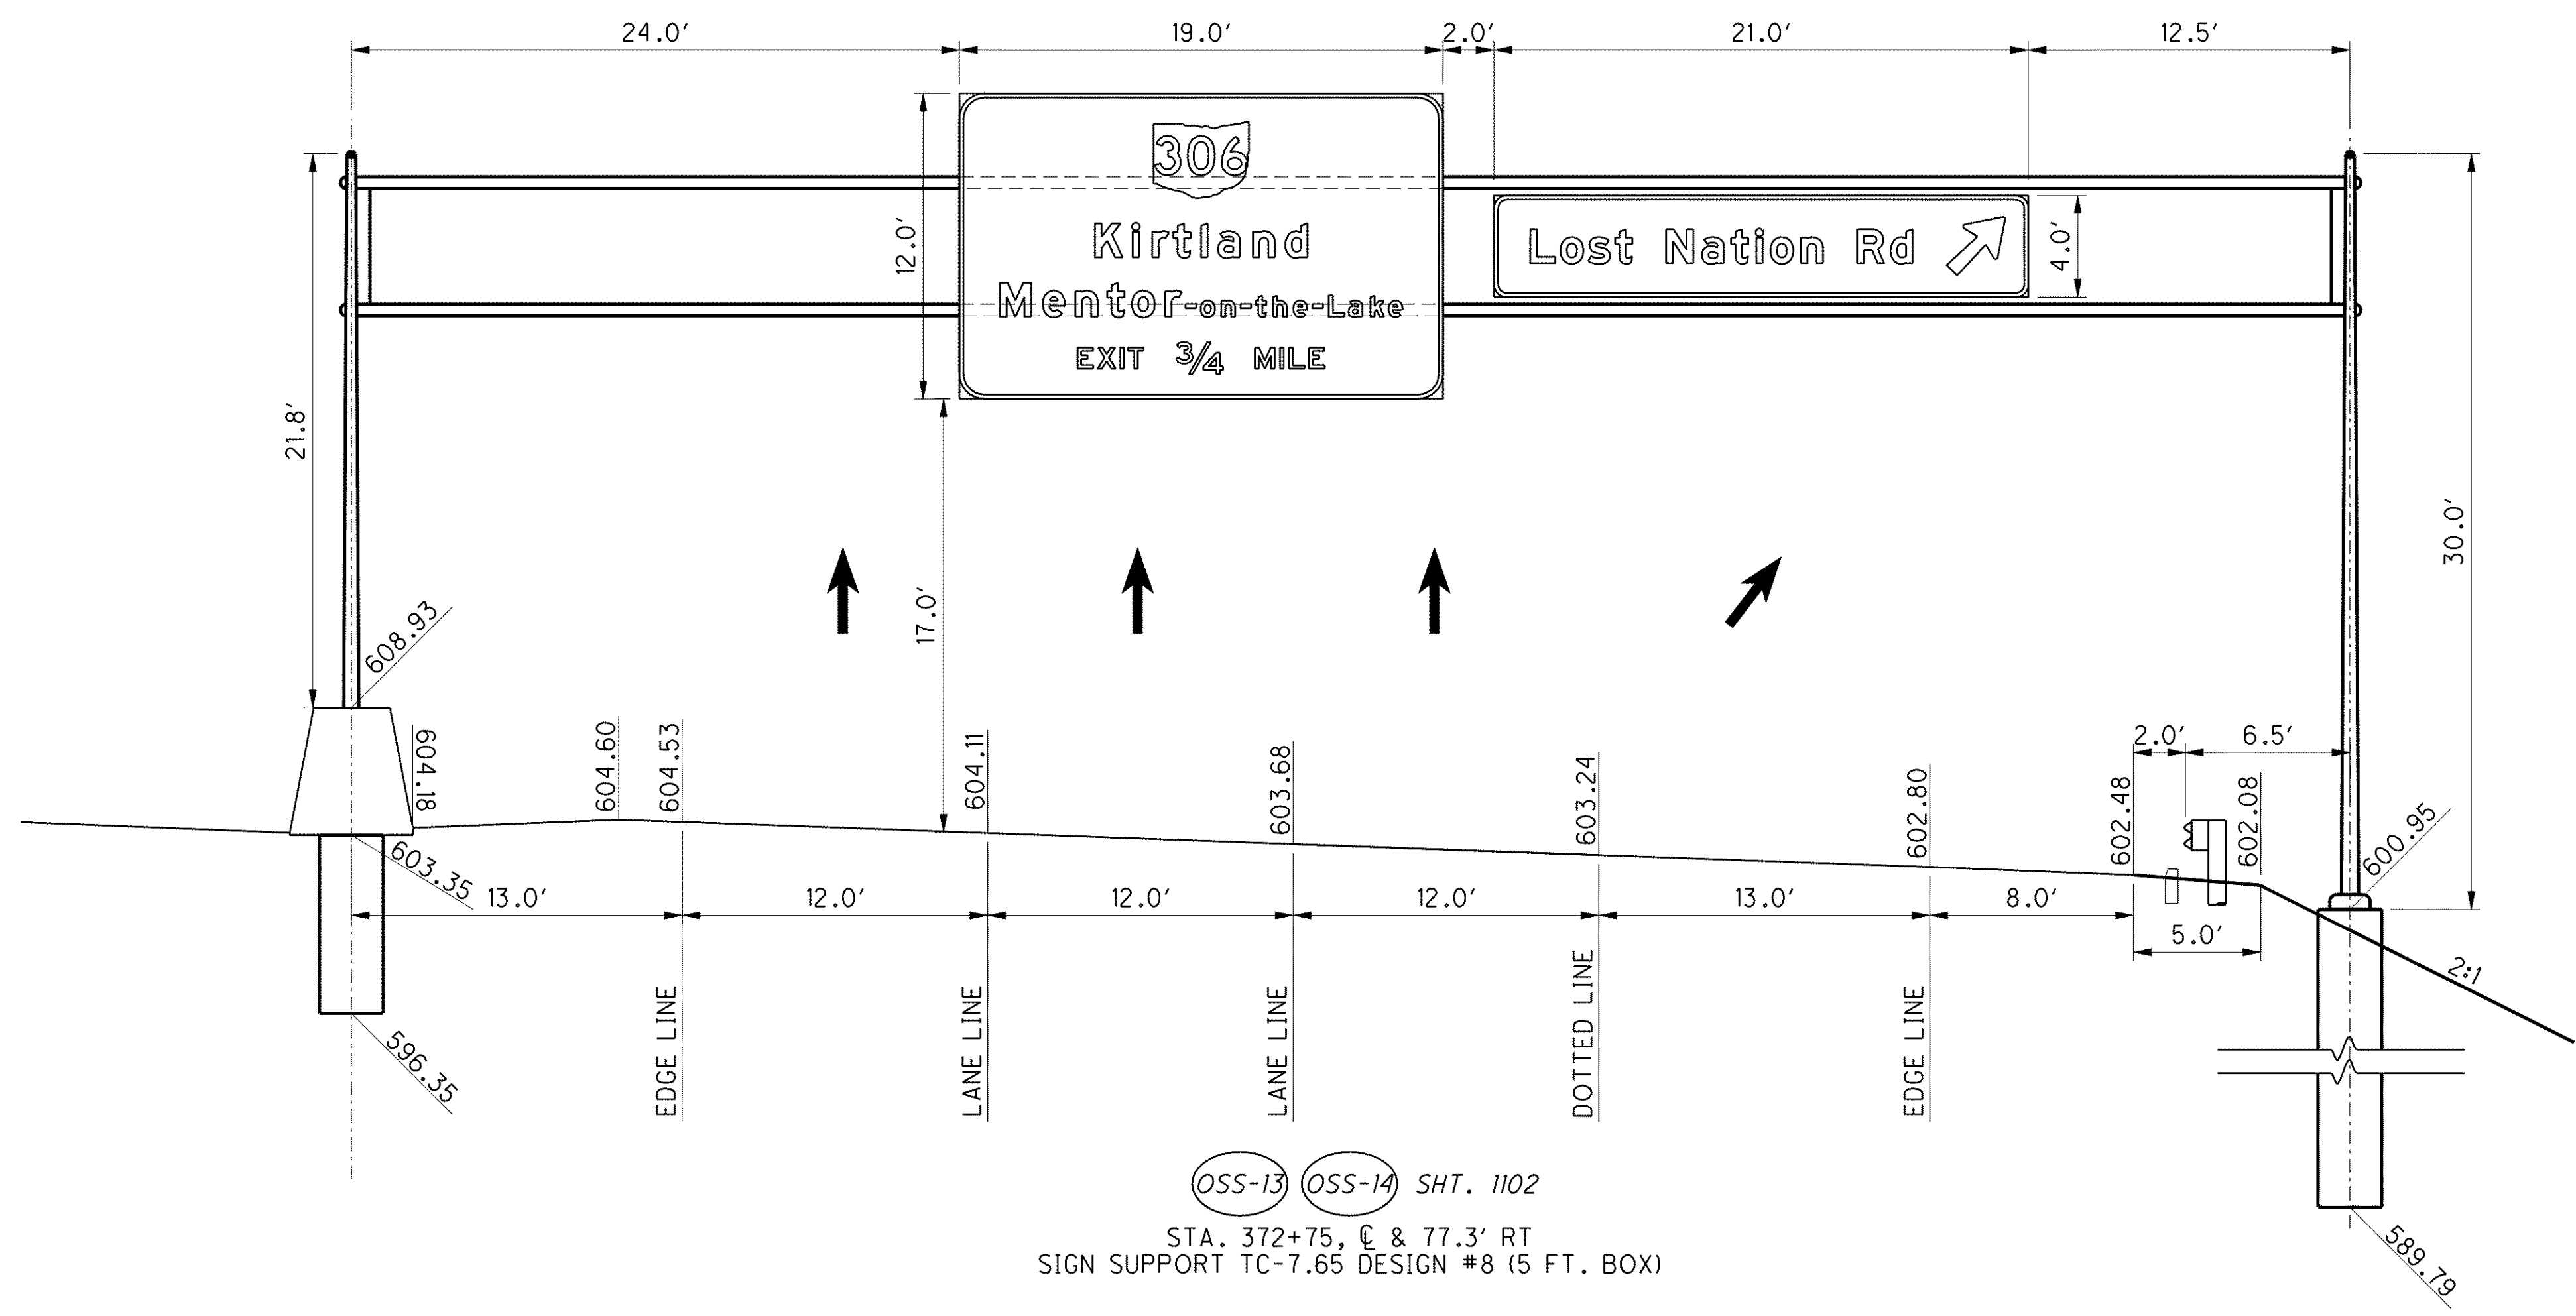

(OSS-13) (OSS-14) SHT. 1102  
STA. 372+75, C & 77.3' RT  
SIGN SUPPORT TC-7.65 DESIGN #8 (5 FT. BOX)

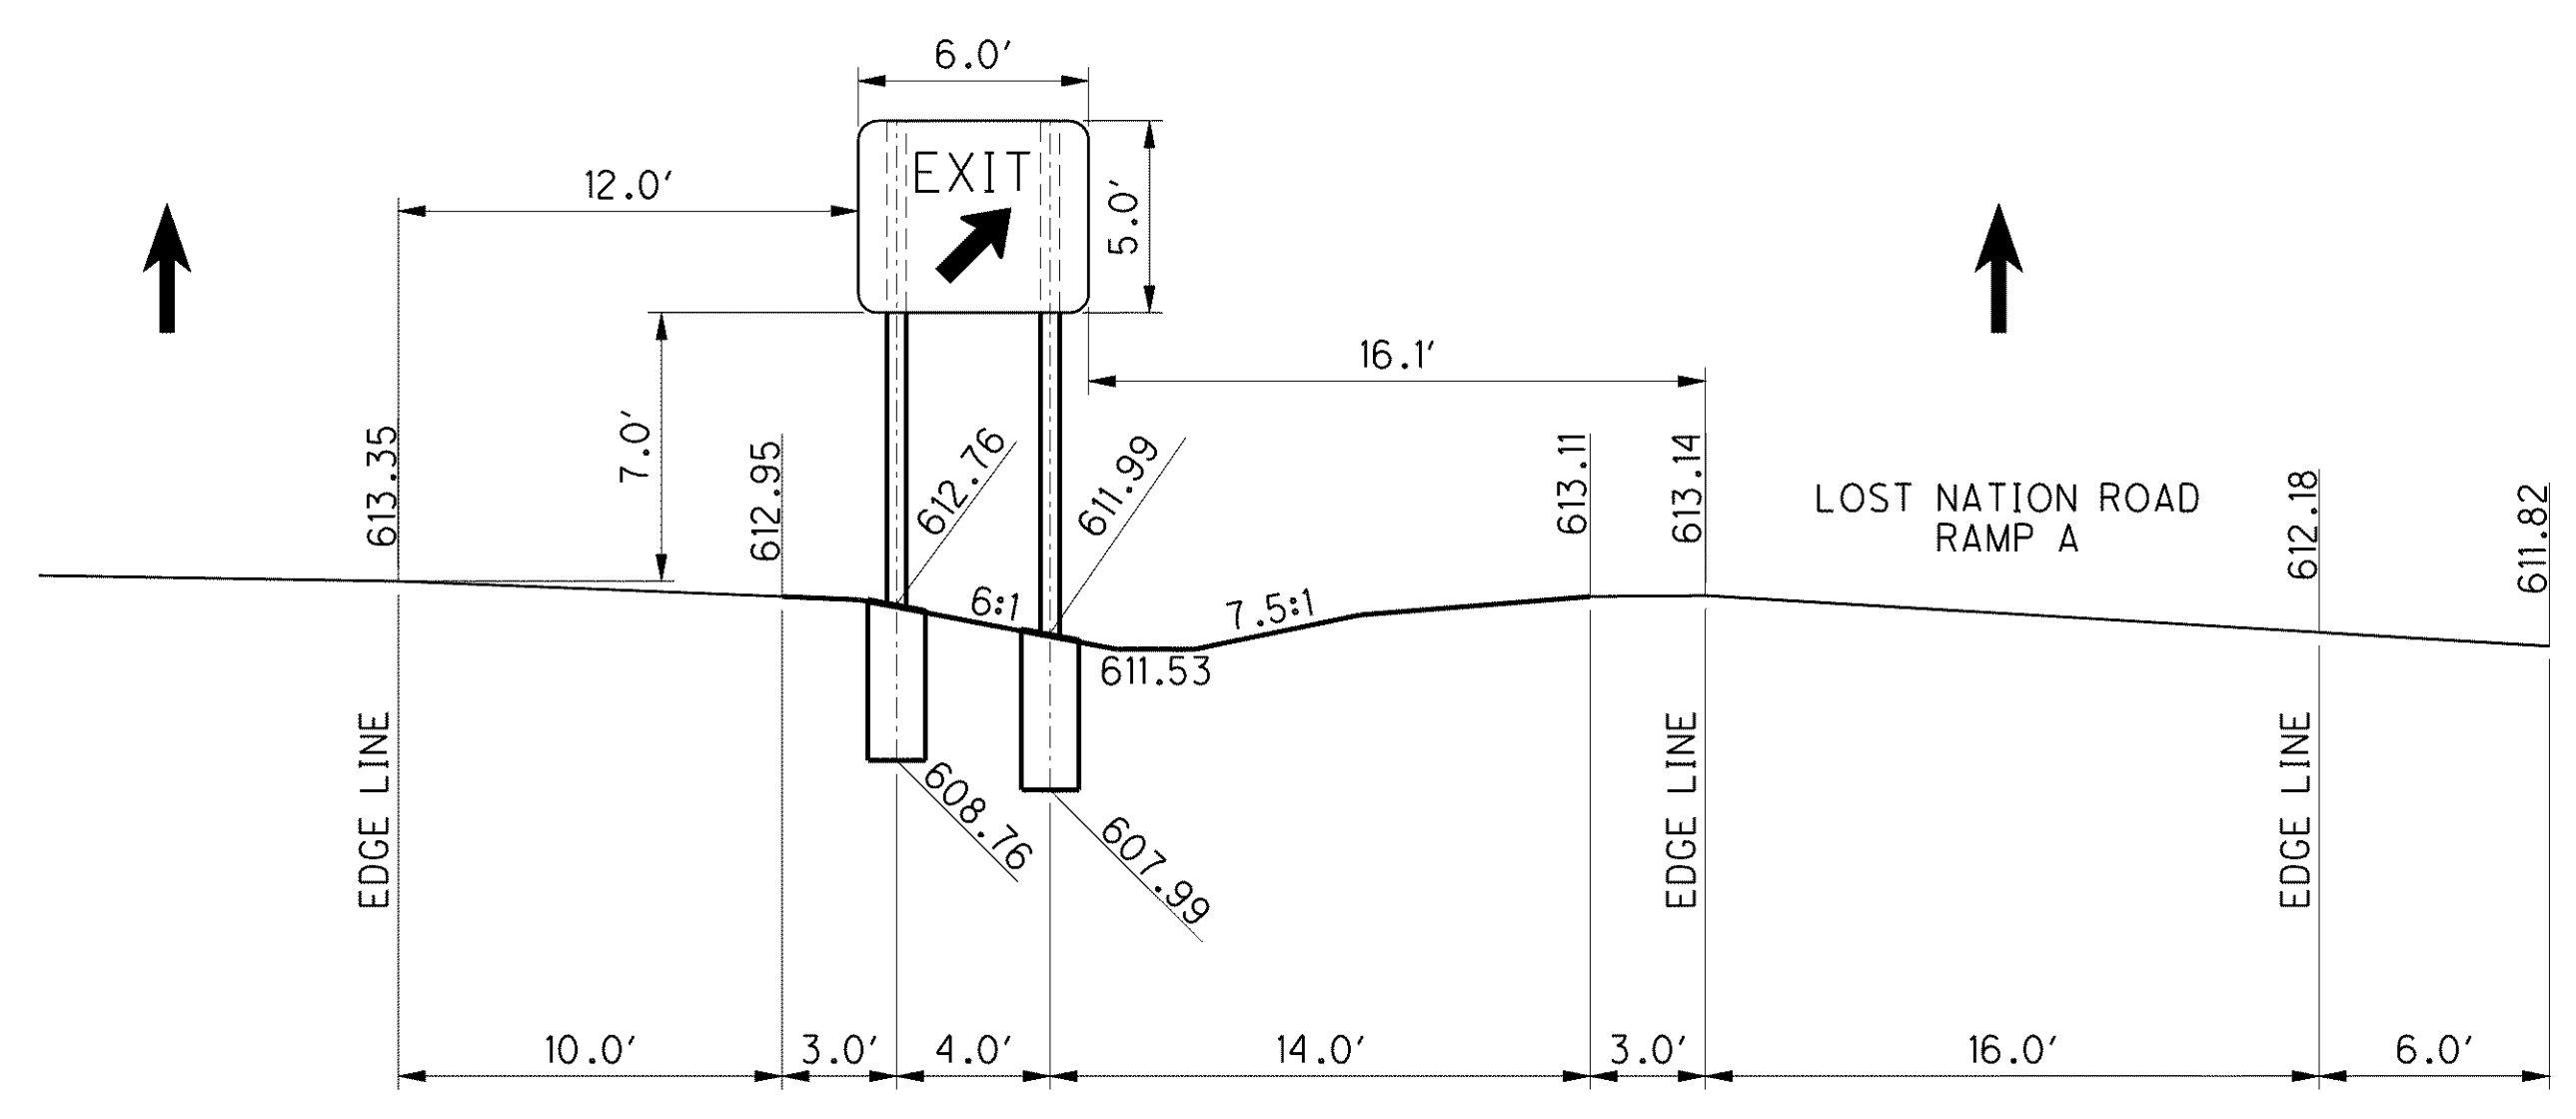

(S-2) SHT. 1104  
STA. 398+55, 69.5' LT  
WESTBOUND S.R. 2  
2 - S4 X 7.7 BEAM SUPPORTS  
WITH BREAKAWAY CONNECTIONS  
17.0' & 16.5'  
FOUNDATION 2 - 1.5' DIA. X 4.0' DEEP

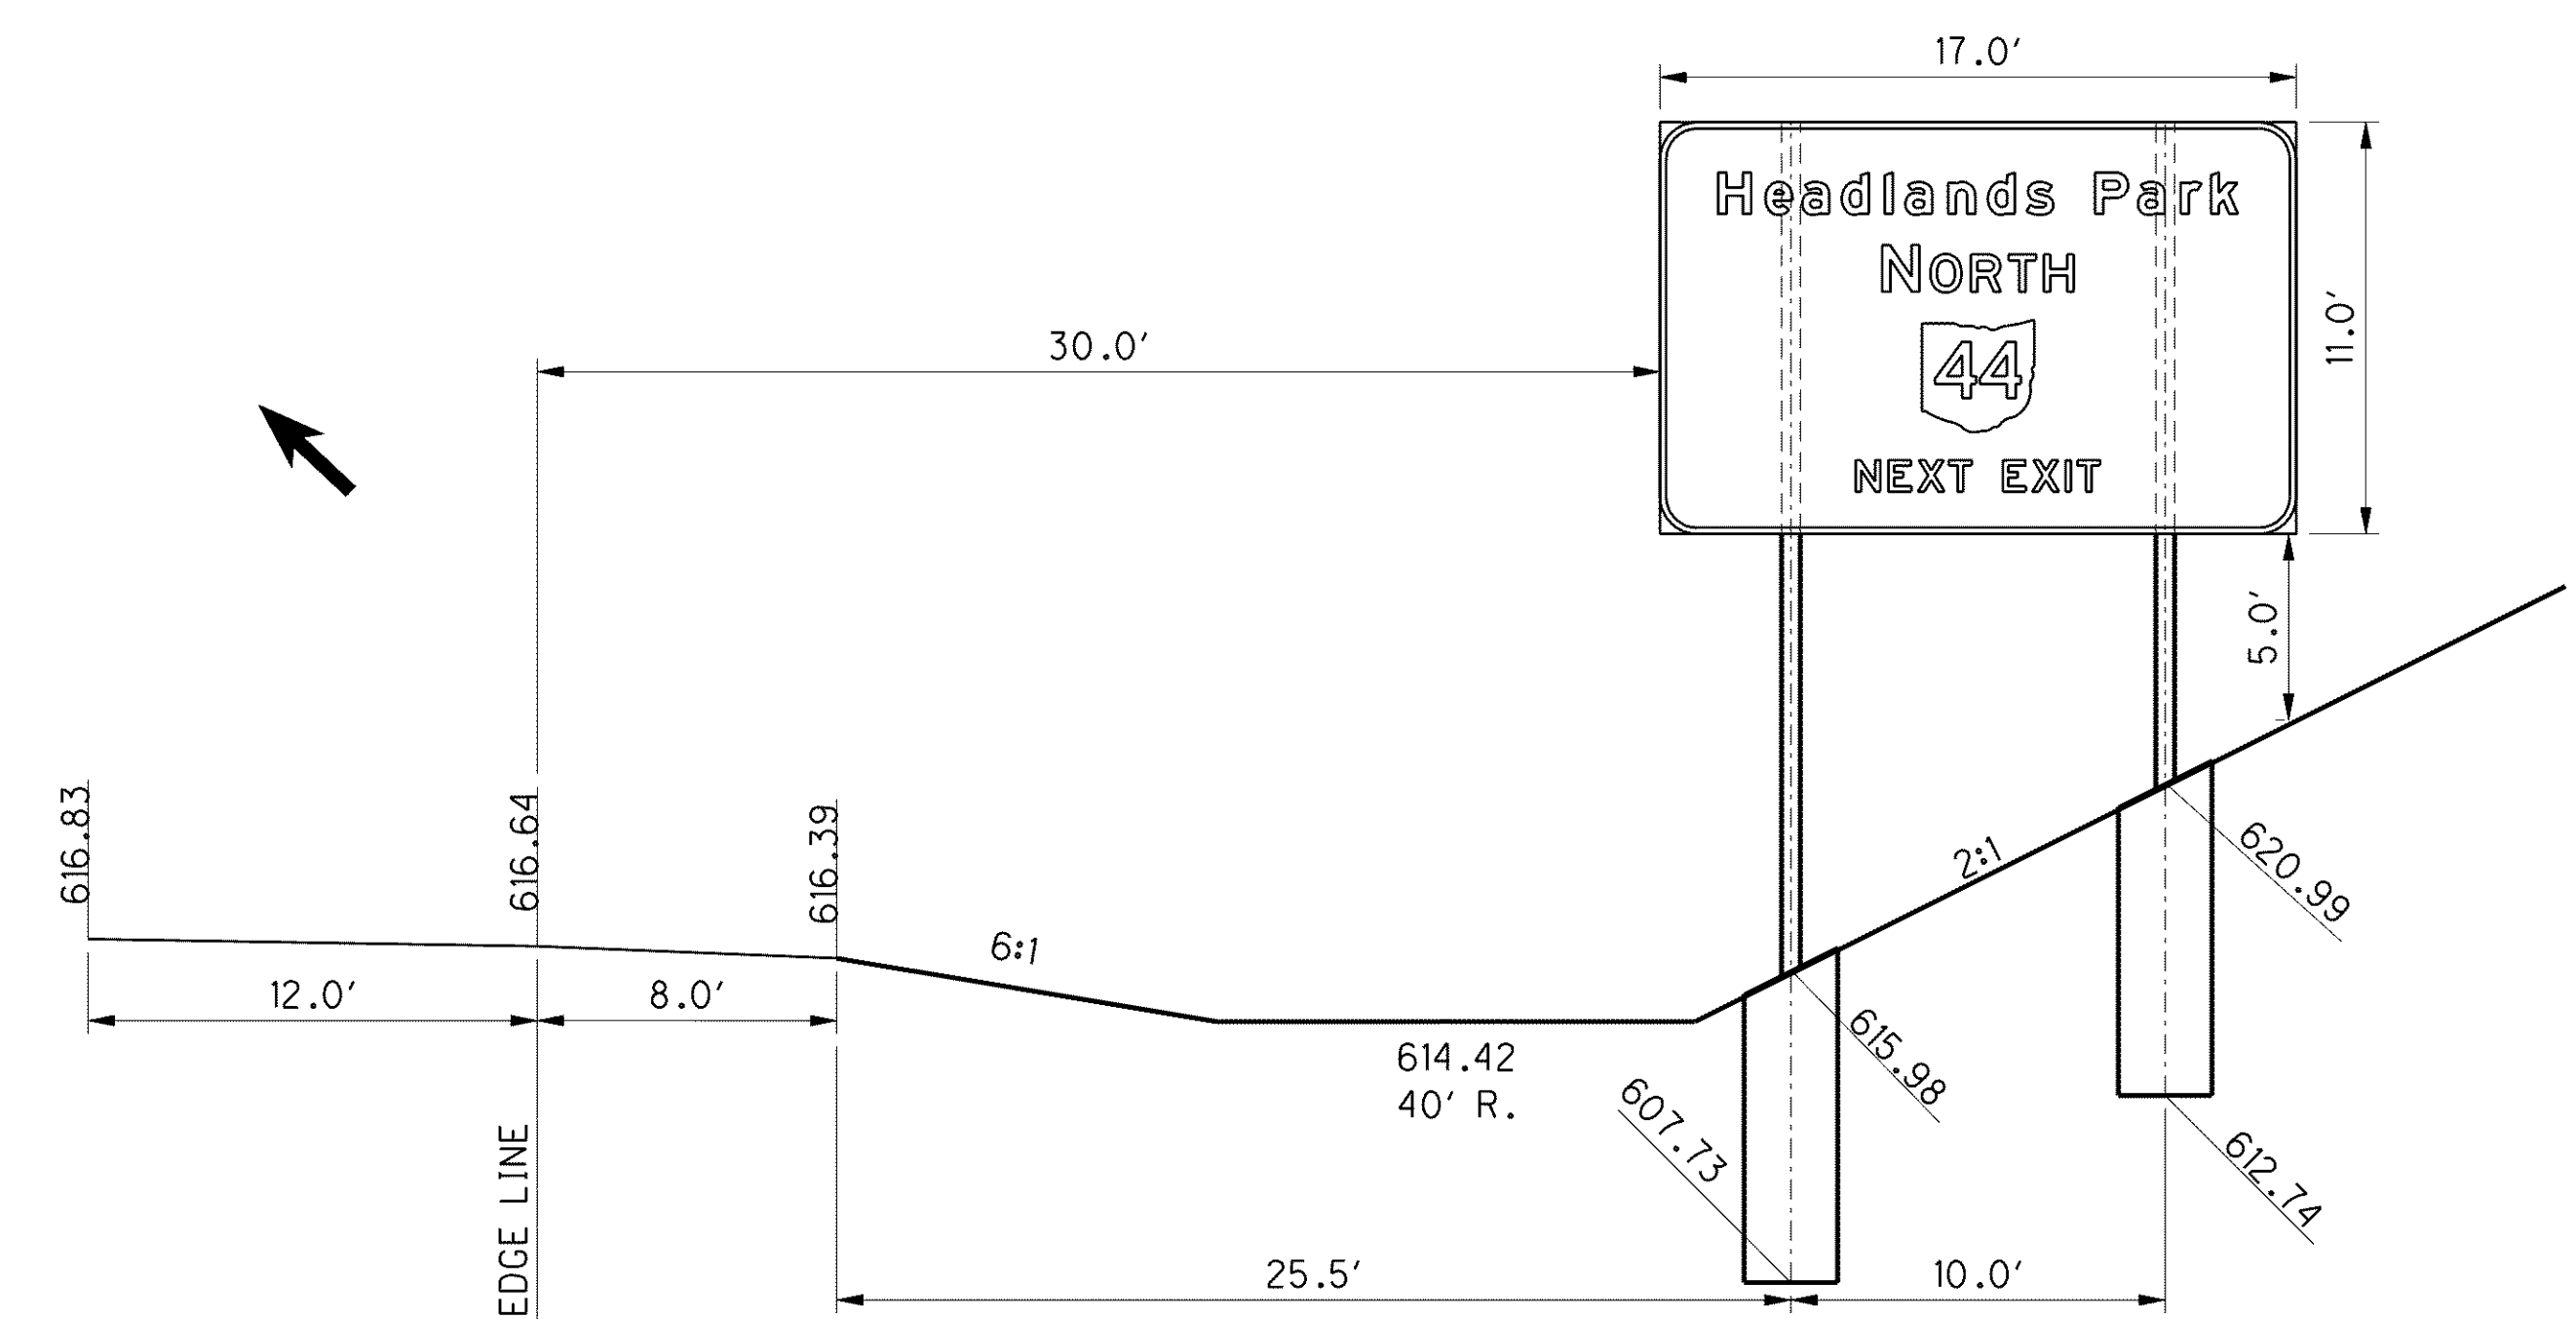

(S-1) SHT. 1105  
STA. 406+55, 99.4' RT  
EASTBOUND S.R. 2  
2 - W12 X 30 BEAM SUPPORTS  
WITH BREAKAWAY CONNECTIONS  
31.0' X 26.0'  
FOUNDATION 2 - 2.5' DIA. X 8.25' DEEP

g:\project\lak\13486\traffic\sheets\13486TE006.dgn 6/23/2008 10:55:43 AM jmadaria