


PLAN

LEGEND:

- * - 3-A601, S529 & PAIR S531 @ 8" = 1'-4"
- ** - BARS TO BE PLACED PARALLEL TO \bar{C} CONSTRUCTION
- *** - 4-A601, S529 & PAIR S531 @ 9" = 2'-3"
- **** - 4-A601, S529 & PAIR S531 @ 11" = 2'-9"

NOTES:

1. ABUTMENT DIAPHRAGM CONCRETE, STEEL SUPERSTRUCTURE, PHASED CONSTRUCTION: PLACE THE CONCRETE IN THE ABUTMENT DIAPHRAGM ENCASEING STRUCTURAL STEEL MEMBERS OF AN INDIVIDUAL PHASE SEPARATELY OR WITH THE DECK CONCRETE OF THAT PHASE. IF THE DIAPHRAGM CONCRETE IS PLACED SEPARATELY, ALLOW AT LEAST 48 HOURS OF SET TIME BEFORE PLACING DECK CONCRETE. LOCATE THE HORIZONTAL CONSTRUCTION JOINT BETWEEN THE DIAPHRAGM AND DECK CONCRETE AT THE APPROACH SLAB SEAT.
2. FOR SECTION A-A AND ADDITIONAL NOTES SEE SHEET 53/70.
3. FOR LIST OF ABBREVIATIONS SEE SHEET 4/70.
4. MINIMUM BAR LAPS: # 5 BAR = 2'-5"

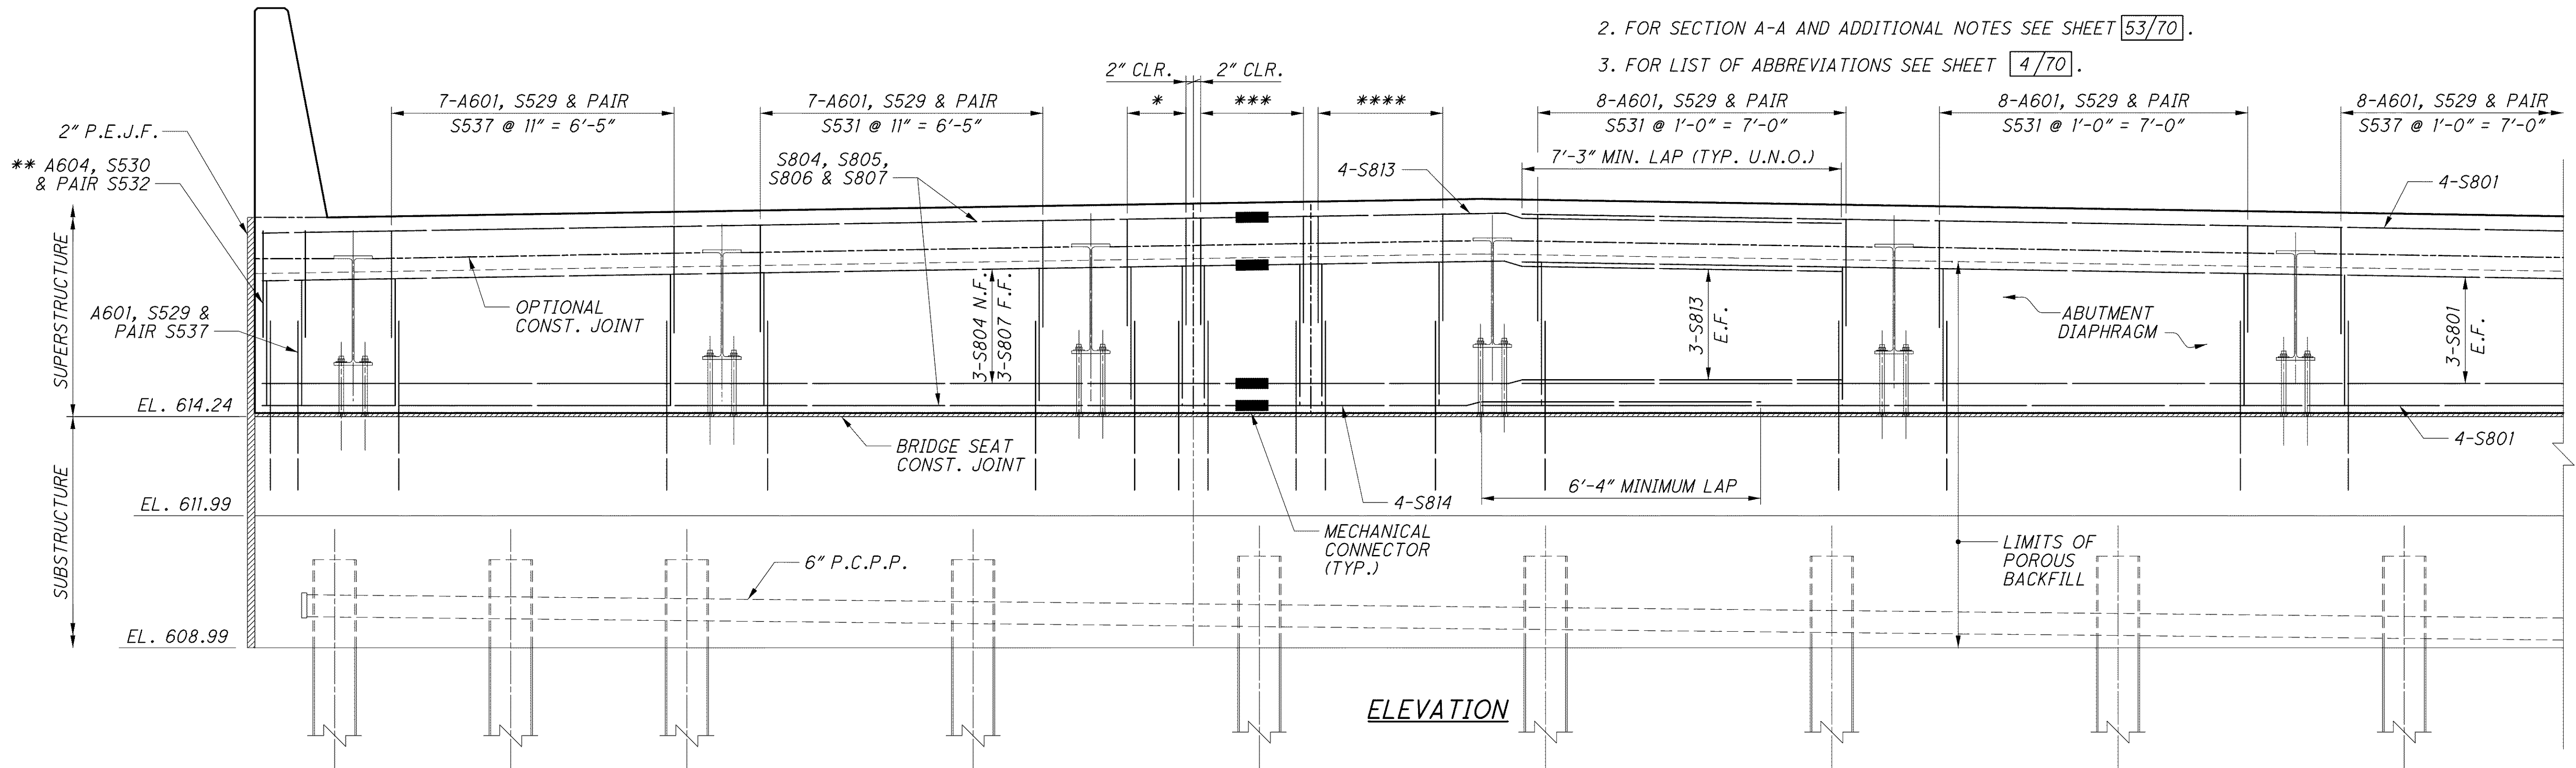

ELEVATION

j:\LAK\13486\bridge\LAK002_0486\csheets\02_0486CSD011.dgn 03-JUL-2008 1:46PM lntn

DESIGNED	P.J.L.	CHECKED	EBS
DRAWN	L.E.L.	REVISED	
REVIEWED	R.J.O.	STRUCTURE FILE NUMBER	4300696 (L/ 4300726 (R))
DATE	6-19-08		