



NOTES

1. MINIMUM BAR LAPS ARE AS FOLLOWS:
#5 BAR = 38"
#8 BAR = 87"
2. FOR 3/4" DIA. THREADED ROD DETAILS AND NOTES SEE STANDARD DWG. PSID-I-99.
3. FOR LIST OF ABBREVIATIONS SEE SHEET 4/25.

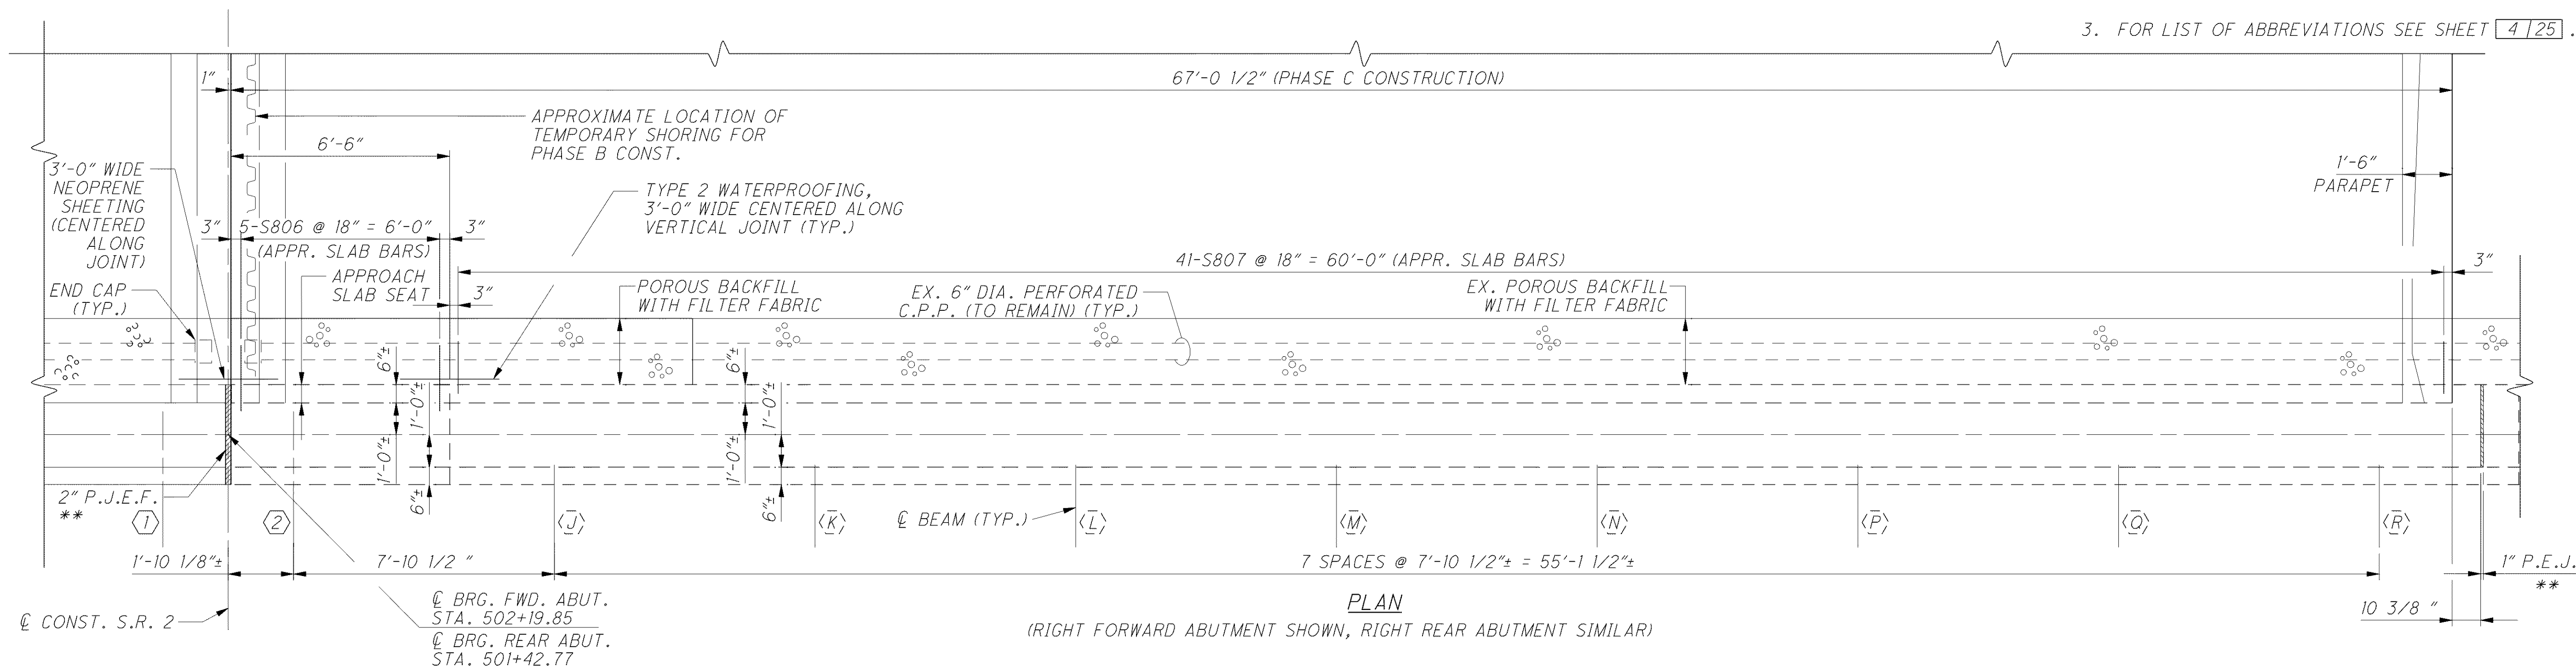

PLAN
(RIGHT FORWARD ABUTMENT SHOWN, RIGHT REAR ABUTMENT SIMILAR)

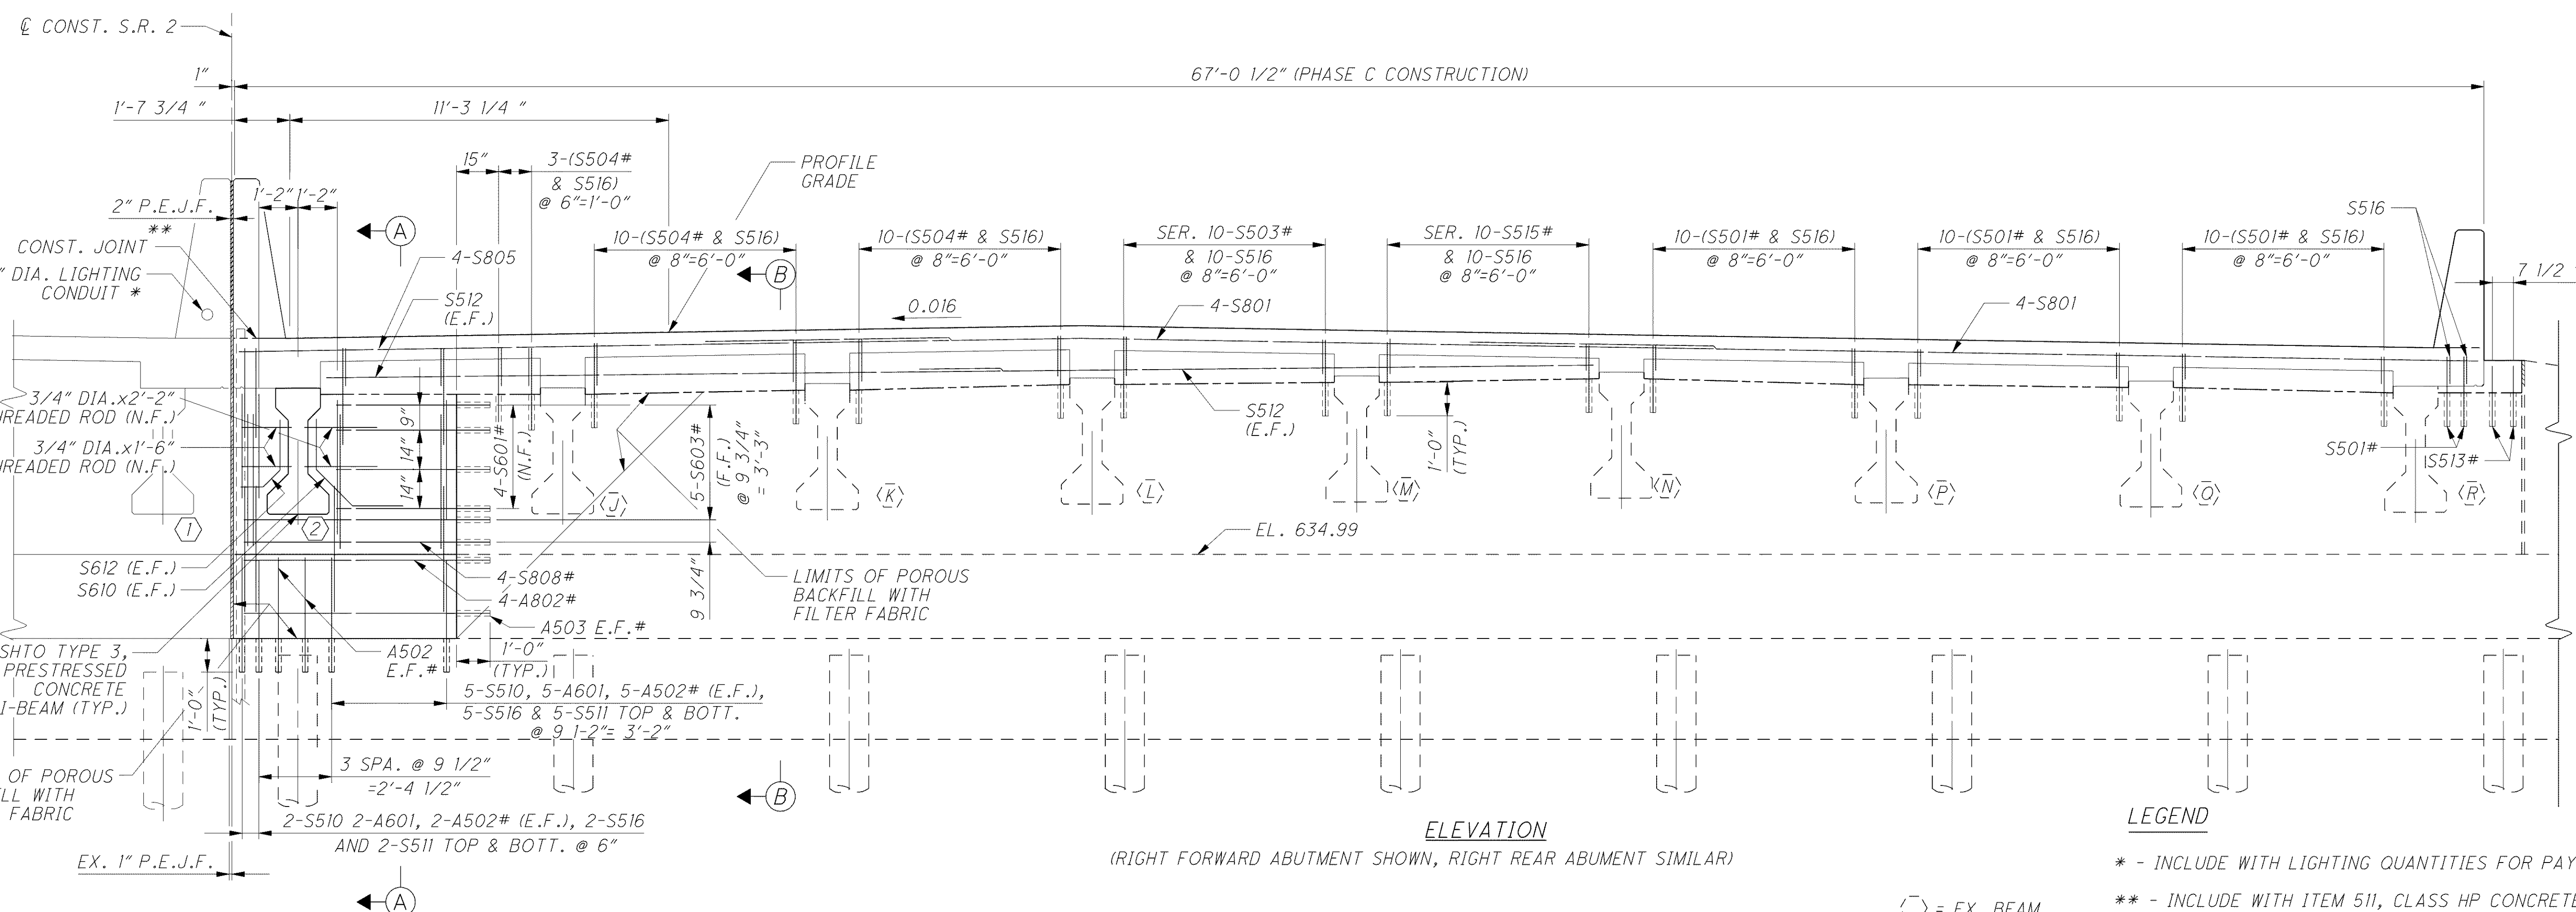

ELEVATION
(RIGHT FORWARD ABUTMENT SHOWN, RIGHT REAR ABUTMENT SIMILAR)

LEGEND

- * - INCLUDE WITH LIGHTING QUANTITIES FOR PAYMENT
- ** - INCLUDE WITH ITEM 511, CLASS HP CONCRETE, BRIDGE DECK, AS PER PLAN FOR PAYMENT
- # DOWEL BARS
- ⬡ = EX. BEAM
- ⬢ = PROP. BEAM

DESIGN AGENCY: **ARCADIS**
 ARCADIS U.S., Inc.
 100 Superior Avenue, Suite 1250 Cleveland, Ohio 44114
 Tel: 216-781-6177 Fax: 216-781-6243 www.arcadis-us.com

DATE: 12/07
 REVIEWED: CMD/FJG
 STRUCTURE FILE NUMBER: 4300092(L) 43000920(R)

DESIGNED: SKS
 CHECKED: RBB

ABUTMENT AND DIAPHRAM DETAILS
 BRIDGE NO. LAK-2-0760 L&R
 STATE ROUTE 2 OVER NEWELL CREEK

LAK-2-3.32
PID 13486

12 / 25
 1605
 1679

o:\project\c000048a001\drawing\lak\13486\bridge\lak002_0760\02_sheets\002_0760CAF002.dgn 6/23/2008 5:13:20 PM troxberry