

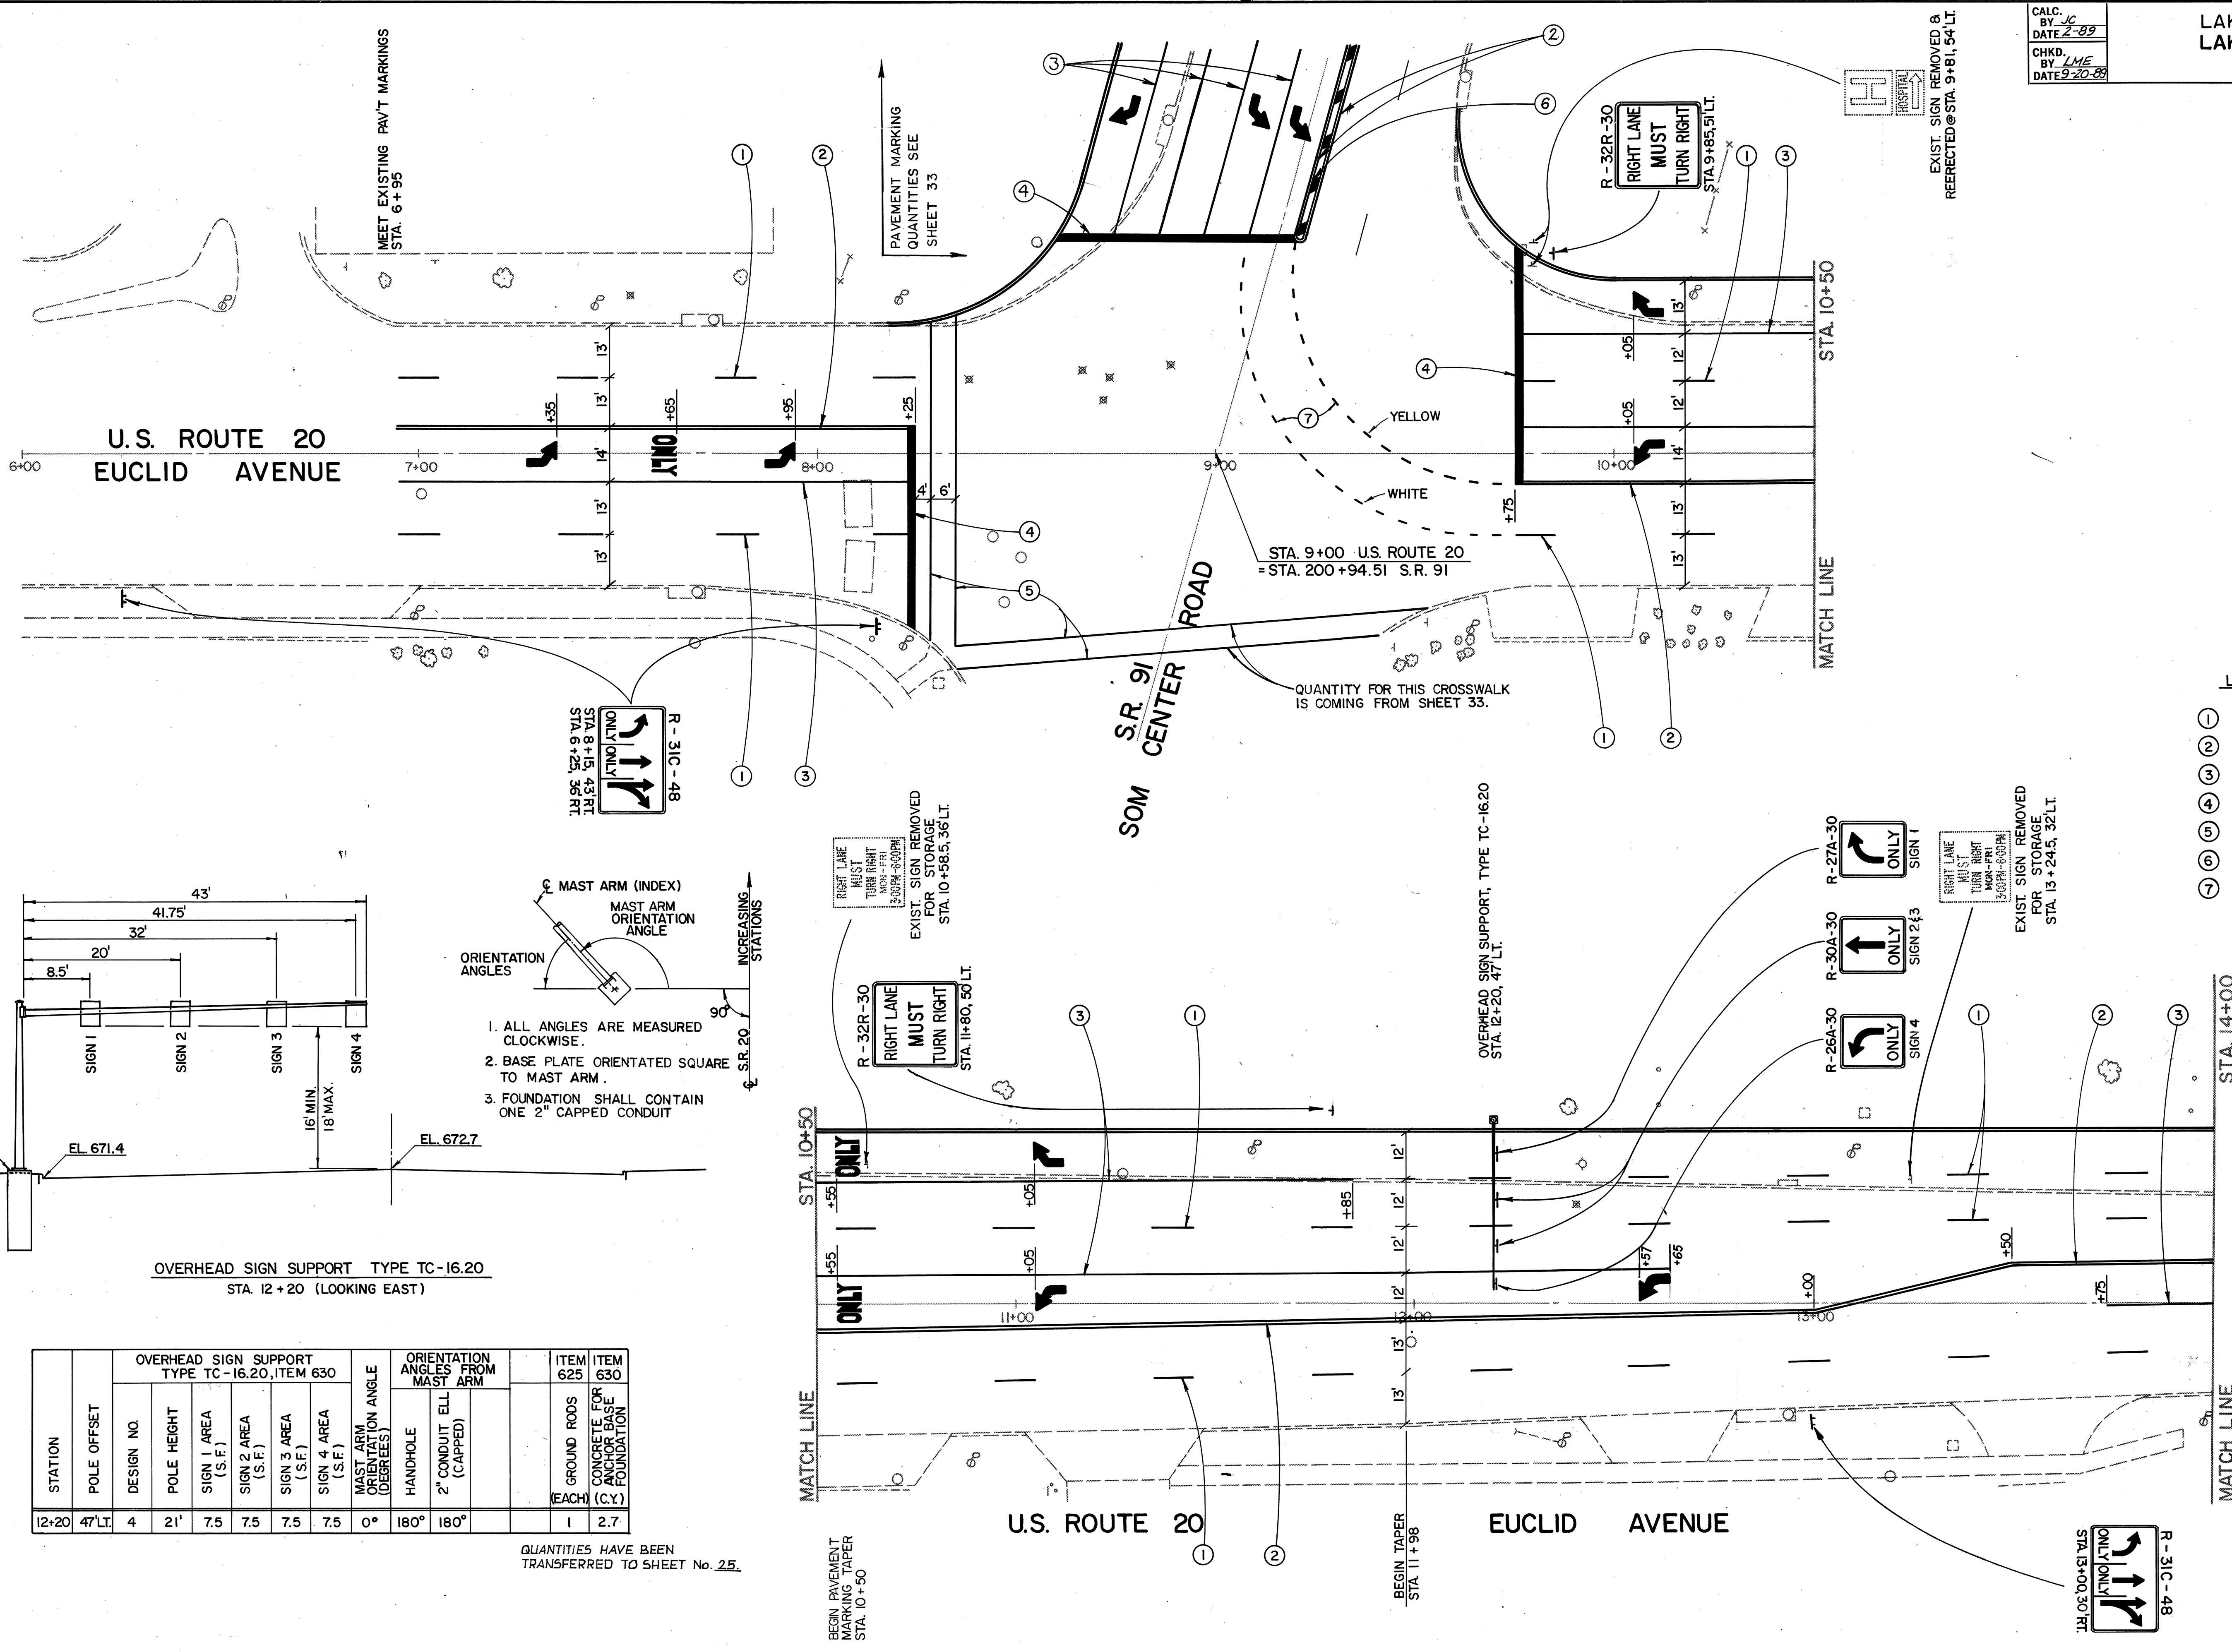


CALC. BY: JC
 DATE: 2-89
 CHKD. BY: LME
 DATE: 9-20-88

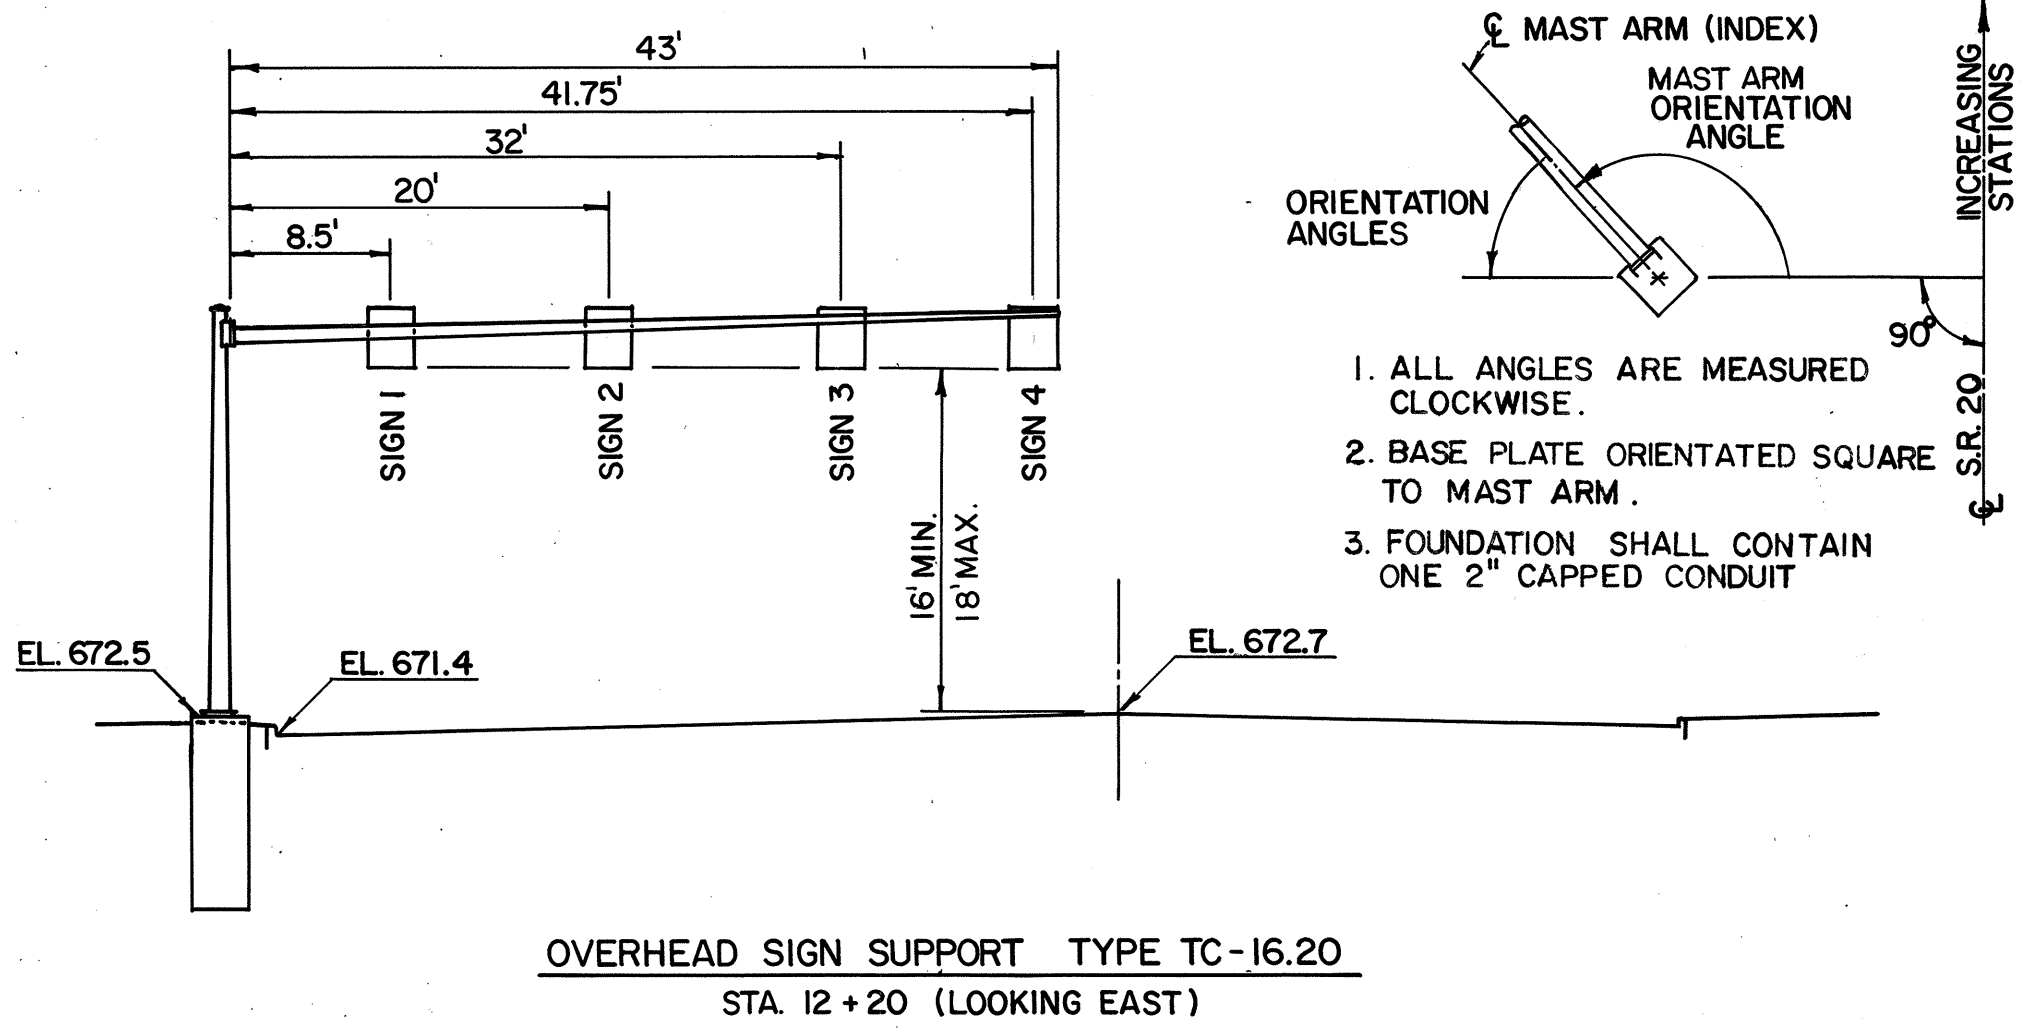

- LEGEND**
- ① LANE LINES
 - ② CENTER LINES (DOUBLE YELLOW)
 - ③ CHANNELIZING LINES
 - ④ STOP LINES
 - ⑤ CROSSWALK LINES
 - ⑥ TRANSVERSE LINES (YELLOW) (24"-12"/C-45°)
 - ⑦ DOTTED LINES, 4 in.

PAVEMENT MARKING QUANTITIES HAVE BEEN TRANSFERRED TO SHEET No. 25
 FOR SIGN SUBSUMMARIES SEE SHEET No. 27.

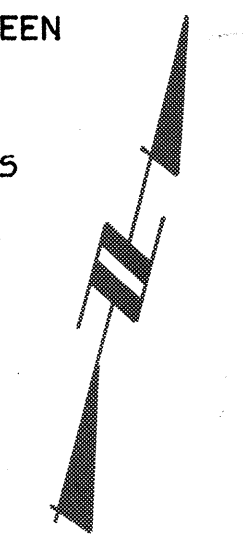

- ORIENTATION ANGLES**
1. ALL ANGLES ARE MEASURED CLOCKWISE.
 2. BASE PLATE ORIENTATED SQUARE TO MAST ARM.
 3. FOUNDATION SHALL CONTAIN ONE 2" CAPPED CONDUIT

STATION	POLE OFFSET	OVERHEAD SIGN SUPPORT TYPE TC-16.20, ITEM 630				MAST ARM ORIENTATION ANGLE (DEGREES)	HANDHOLE	ORIENTATION ANGLES FROM MAST ARM		ITEM 625 (EACH)	ITEM 630 (C.Y.)
		DESIGN NO.	POLE HEIGHT	SIGN 1 AREA (S.F.)	SIGN 2 AREA (S.F.)			SIGN 3 AREA (S.F.)	SIGN 4 AREA (S.F.)		
12+20	47' LT.	4	21'	7.5	7.5	7.5	7.5	0°	180°	1	2.7

QUANTITIES HAVE BEEN TRANSFERRED TO SHEET No. 25.