


COLOR SEQUENCE CHART

SIGNAL NO	LENS	DIAL SETTINGS (Seconds)			
		1	2	3	4
1	R				
	Y				
2	R				
	Y				

Interval: 1 2 3 4

Offset 1: 35 Seconds
Offset 2: 50 Seconds
Offset 3: 16 Seconds

Offset 1 - Average
Offset 2 - Inbound
Offset 3 - Outbound
NOTE: S.L. - Stop Line

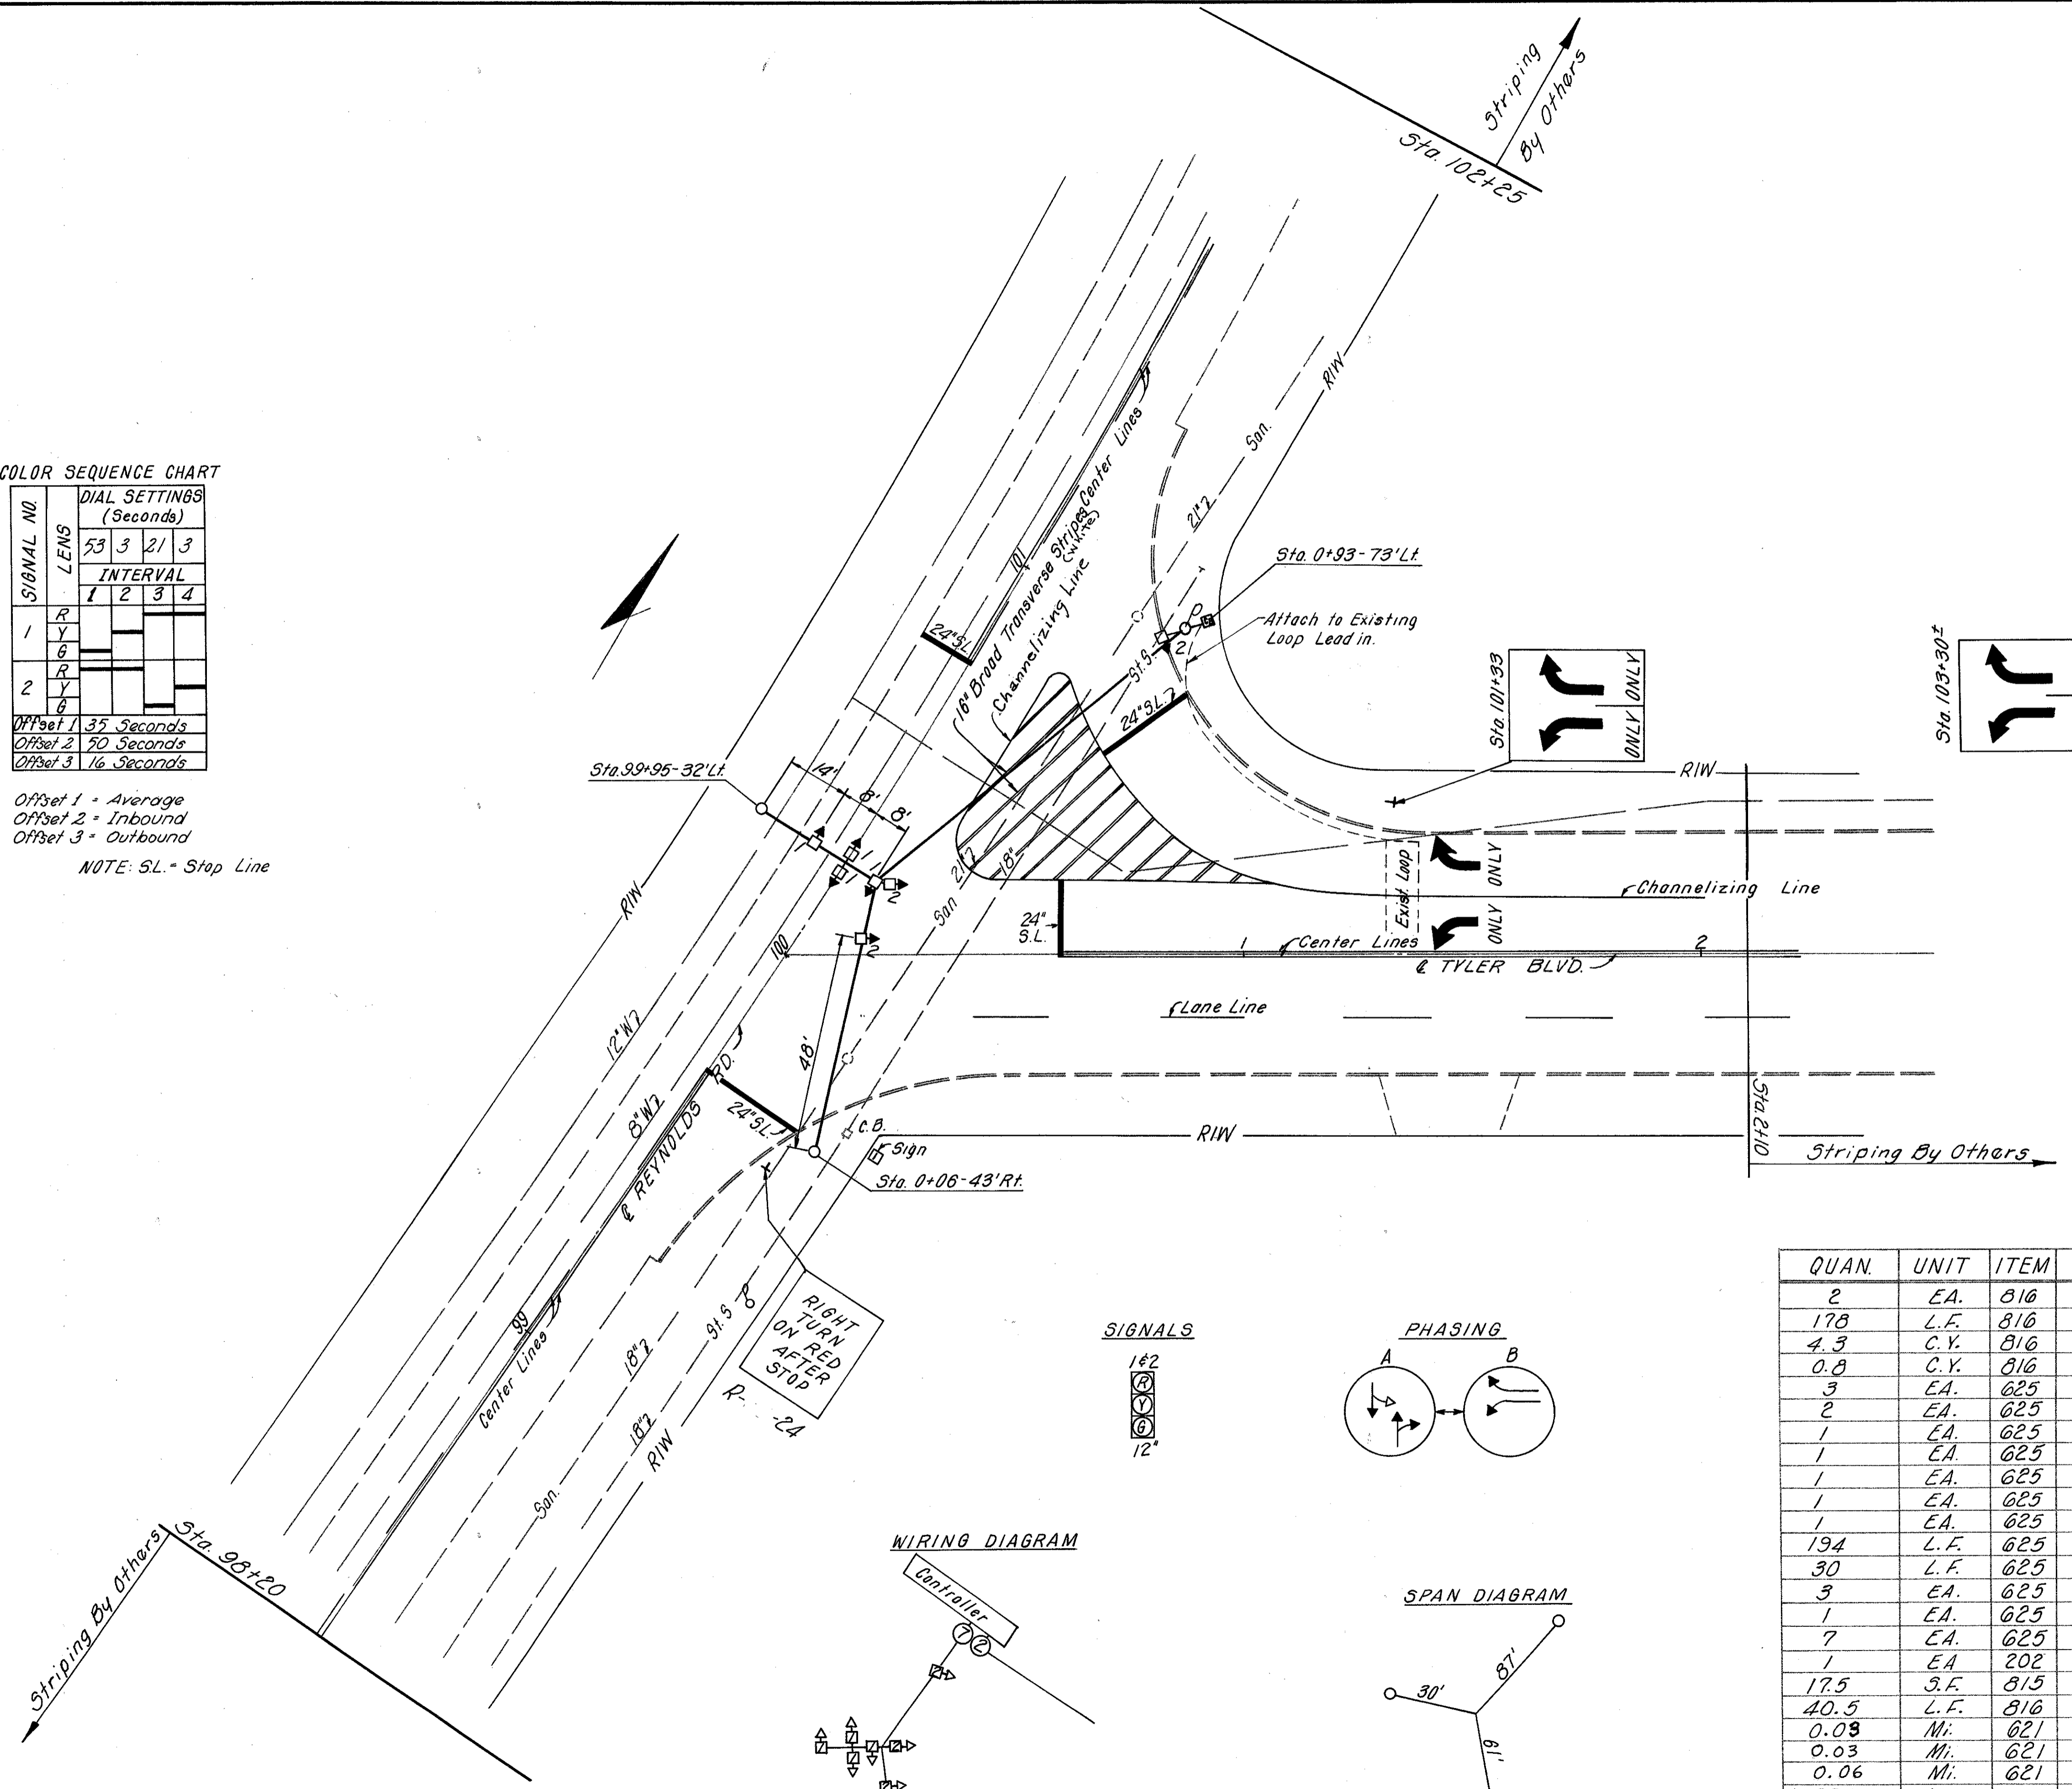

CALC: P.C.S. 4-73
CHK: [Signature]

QUAN.	UNIT	ITEM	DESCRIPTION
2	EA.	816	Signal Strain Pole 3 Ga, 12"x28'
178	L.F.	816	Messenger Wire 7 Strand 3/8" With Accessories
4.3	C.Y.	816	Concrete For Signal Support Foundation
0.8	C.Y.	816	Concrete For Controller And Pedastal Foundations
3	EA.	625	Traffic Signal Head, 3 Section, 12" Lens, One-Way
2	EA.	625	Traffic Signal Head, 3 Section, 12" Lens, Two-Way
1	EA.	625	Signal Controller (2 Phase Digital Solid State Traffic Timer)
1	EA.	625	Signal Control Cabinet, 7.7 C.F.
1	EA.	625	10 Channel Decoder
1	EA.	625	Loop Detector Amplifier
1	EA.	625	Power Service
194	L.F.	625	Signal Cable 7/c No. 14 AWG IM5A 19-1-67
30	L.F.	625	Power Cable 3/c No. 8 AWG Stranded RHW, or RHW Type
3	EA.	625	Ground Rod
1	EA.	625	Weatherhead And Conduit Riser
7	EA.	625	Covering of Traffic Signal Heads
1	EA.	202	Removal of Existing Signal Installation
17.5	S.F.	815	Signs Flat Sheet Type, As Per Plan
40.5	L.F.	816	Structural Support, 6Lb. Beam Driven
0.03	Mi.	621	4" Lane Lines, Thermoplastic
0.03	Mi.	621	Center Lines, Double, Thermoplastic (solid)
0.06	Mi.	621	Center Lines, Double, Thermoplastic (solid-dashed)
280	L.F.	621	Channelizing Lines, Thermoplastic
76	L.F.	621	24" Stop Line, Thermoplastic
125	L.F.	621	16" Broad Transverse Stripes
2	EA.	621	Lane Arrows, Thermoplastic
2	EA.	621	Word "ONLY" on Pavement, Thermoplastic

