




CALC: *[Signature]* 4-78
CHK: *[Signature]* 4-78

STREETS	SIGNAL NO.	DIAL SETTINGS (SECONDS)												
		7 MIN VAR			3 VAR			7 MIN VAR			3 VAR			
		1	2	3	4	5	6A	7A	8A	6	7	8	9	10
CROSS CROSS MALL ZAYRE MENTOR MALL DR. AVE.	P, D	W												
		DW	F	F										
MENTOR AVENUE WESTBOUND	1	W												
		DW												
MENTOR AVENUE EASTBOUND	4	W												
		DW	F	F										
MALL DRIVE NORTHBOUND	5	W												
		DW												
MALL DRIVE SOUTHBOUND	7	W												
		DW												
ZAYRE DRIVE SOUTHBOUND	8	W												
		DW												

F = Flashing "DONT WALK"

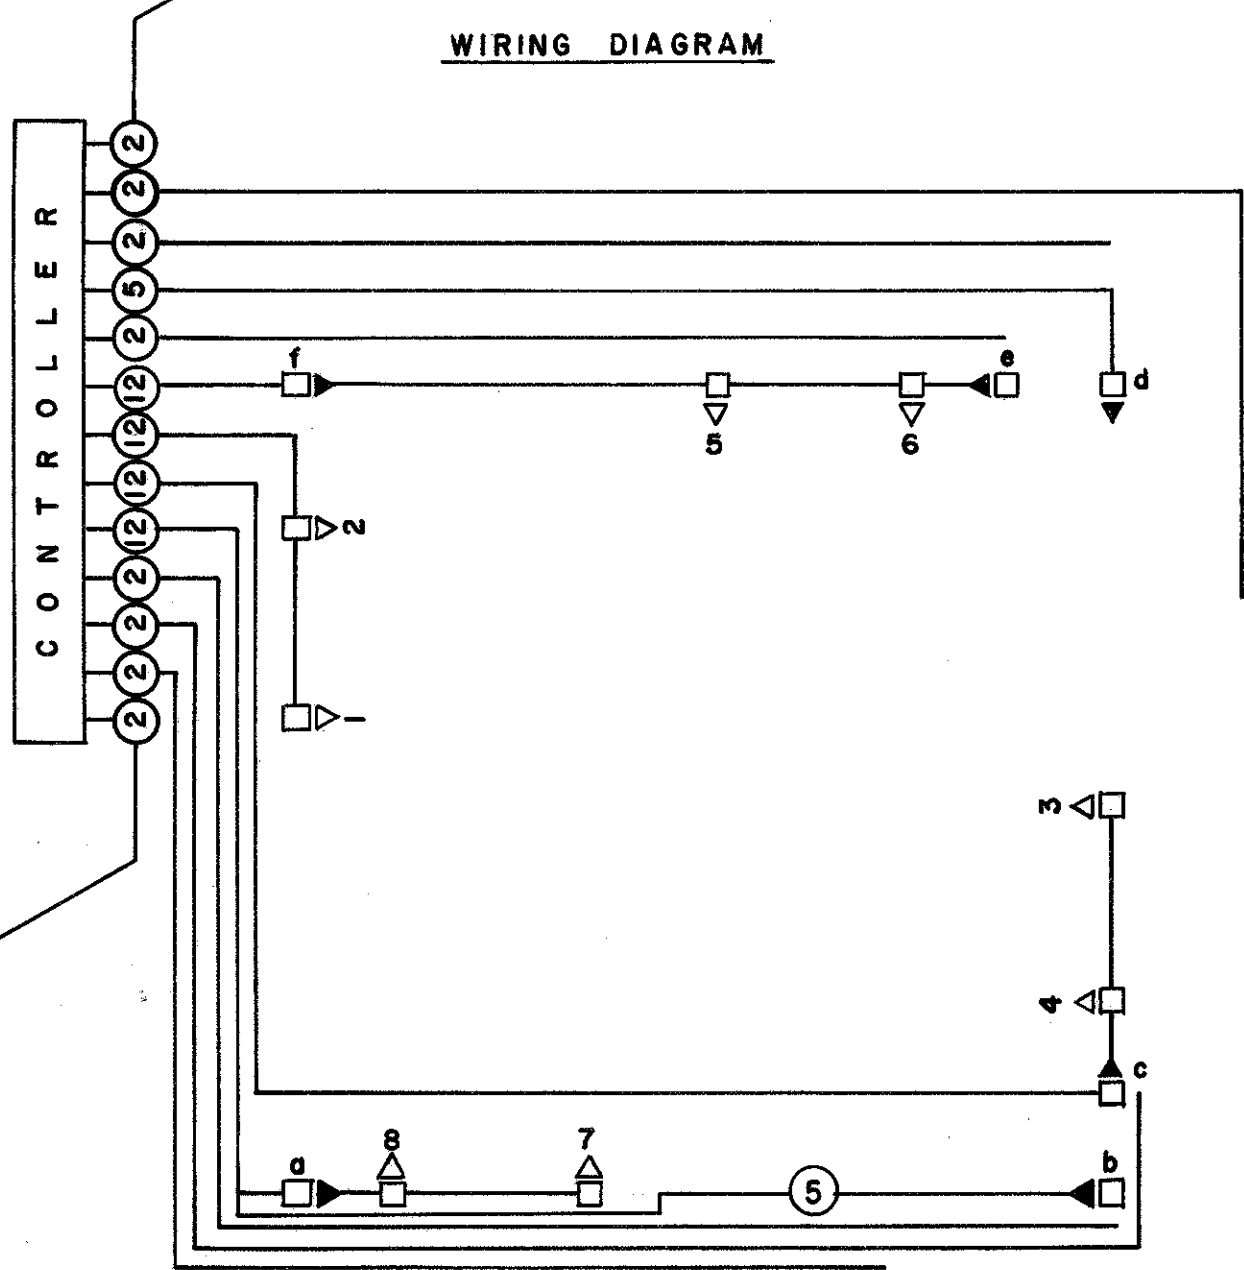

NOTE:
OFFSET 1 = AVERAGE
OFFSET 2 = INBOUND
OFFSET 3 = OUTBOUND

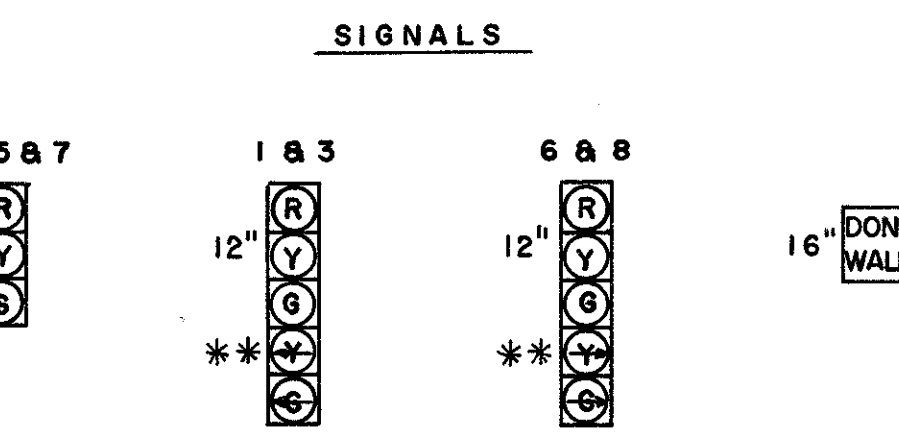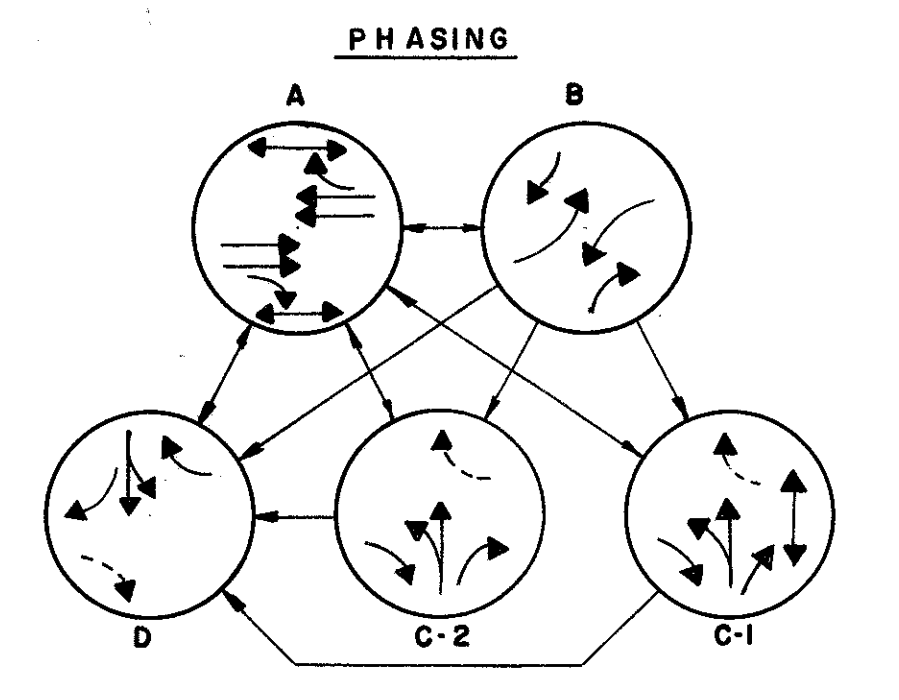

NOTE: ** SECTION TO BE MADE INOPERATIVE AFTER CONNECTION

QUAN.	UNIT	ITEM	DESCRIPTION
1	EA.	816	SIGNAL SUPPORT, 7 GA., 10" x 20' POLE, 26' ARM
2	EA.	816	SIGNAL SUPPORT, 7 GA., 12" x 20' POLE, 32' ARM
1	EA.	816	SIGNAL SUPPORT, 7 GA., 14" x 20' POLE, 38' ARM
1	EA.	816	OVERHEAD SIGN SUPPORT, 7 GA., 12" x 20' POLE, 34' ARM
1	EA.	816	OVERHEAD SIGN SUPPORT, 3 GA., 12" x 20' POLE, 44' ARM
11.8	C.Y.	816	CONCRETE FOR SIGNAL SUPPORT FOUNDATIONS
2	EA.	816	PEDESTRIAN SIGNAL SUPPORT, PEDESTAL MOUNTED, 4" x 8'
1.3	C.Y.	816	CONCRETE FOR CONTROLLER AND PEDESTAL FOUNDATIONS
4	EA.	G25	TRAFFIC SIGNAL HEAD, 3 SECTION, 12" LENS, ONE-WAY
4	EA.	G25	TRAFFIC SIGNAL HEAD, 5 SECTION, 12" LENS, ONE-WAY
6	EA.	G25	PEDESTRIAN SIGNAL HEAD, INCANDESCENT COLORED BULB TYPE, 4 1/2" LETTER
1	EA.	G25	SIGNAL CONTROLLER (4 PHASE DIGITAL SOLID STATE TRAFFIC TIMER)
1	EA.	G25	SIGNAL CONTROL CABINET, 7.7 G.F.
4	EA.	G25	LOOP DETECTOR AMPLIFIER
6	EA.	G25	PEDESTRIAN PUSH BUTTON WITH SIGN
233	L.F.	G25	SIGNAL CABLE 5/C NO. 14 AWG IMSA 19-1-67
746	L.F.	G25	SIGNAL CABLE 12/C NO. 14 AWG IMSA 19-1-67
60	L.F.	G25	POWER CABLE 3/C NO. 8 AWG STRANDED RHW OR RHW TYPE
1	EA.	G25	POWER SERVICE
952	L.F.	G25	LOOP DETECTOR WIRE, NO. 14 AWG, RHW OR RHW TYPE
911	L.F.	G25	LOOP DETECTOR LEAD-IN CABLE 2/C NO. 14 AWG, TWISTED PAIR, SHIELDED
337	L.F.	G25	LOOP DETECTOR PAVEMENT CUTTING
12	EA.	G25	CABLE SUPPORT ASSEMBLY
7	EA.	G25	GROUND ROD
7	EA.	G25	PULL BOX 18" CIRCULAR 713.03, AS PER PLAN
110	L.F.	G25	CONDUIT 2" 713.04, TYPE III
231	L.F.	G25	CONDUIT 2", JACKED UNDER PAVEMENT, AS PER PLAN
110	L.F.	G25	TRENCH
8	EA.	G25	COVERING OF TRAFFIC SIGNAL HEADS
1	EA.	202	REMOVAL OF EXISTING SIGNAL INSTALLATION
78.8	S.F.	815	SIGNS FLAT SHEET TYPE, AS PER PLAN
40.5	L.F.	816	STRUCTURAL SUPPORT, 6 LB. BEAM DRIVEN
0.11	MT.	G21	4" LANE LINES, THERMOPLASTIC
0.09	MT.	G21	CENTER LINES, DOUBLE, THERMOPLASTIC (SOLID)
408	L.F.	G21	CHANNELIZING LINES, THERMOPLASTIC
142	L.F.	G21	24" STOP LINES, THERMOPLASTIC
368	L.F.	G21	6" CROSSWALK LINES, THERMOPLASTIC
6	EA.	G21	LANE ARROWS, THERMOPLASTIC
1	EA.	G25	10 CHANNEL DECODER
5	EA.	G21	WORD "ONLY" ON PAVEMENT, THERMOPLASTIC,