
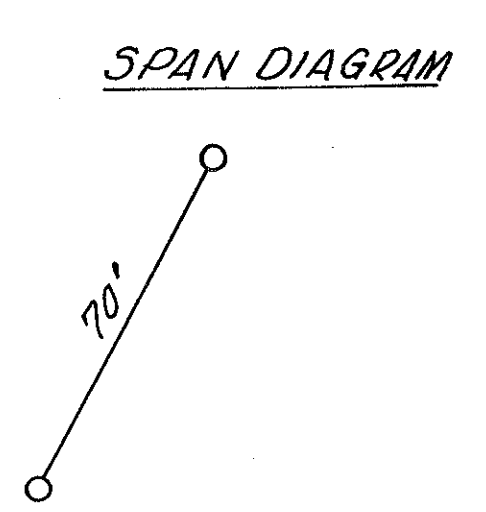
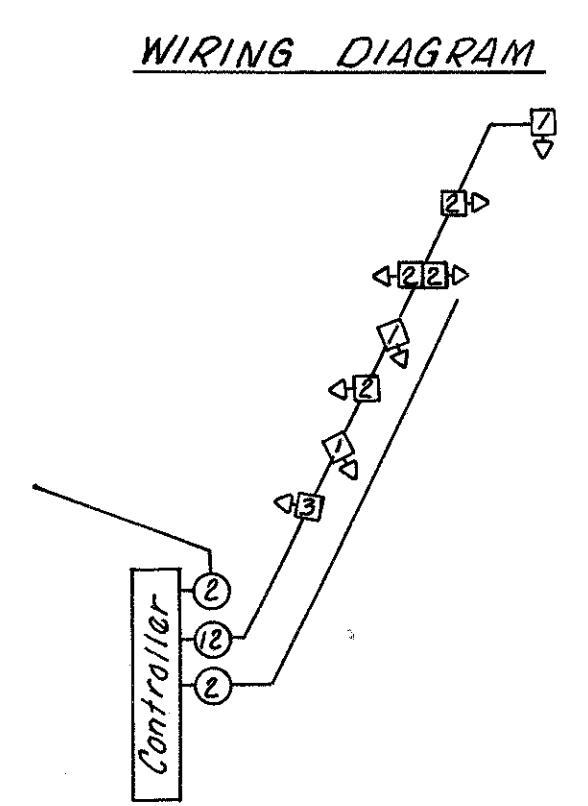
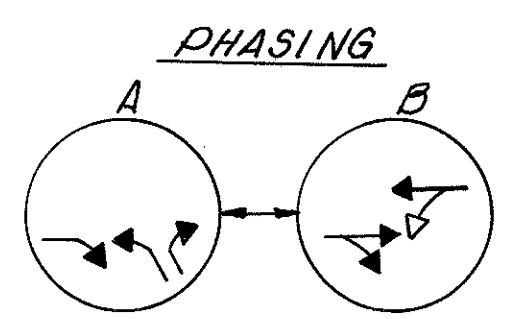


CALC: RCB 4-73
CHK: [Signature] 4-73

COLOR SEQUENCE CHART

SIGNAL NO.	LENS	DIAL SETTINGS (Seconds)			
		54	3	20	3
1	R				
	Y				
	G				
2	R				
	Y				
	G				
3	R				
	Y				
	G				
Offset 1		12 Seconds			
Offset 2		29 Seconds			
Offset 3		34 Seconds			

Offset 1 = Average
Offset 2 = Inbound
Offset 3 = Outbound

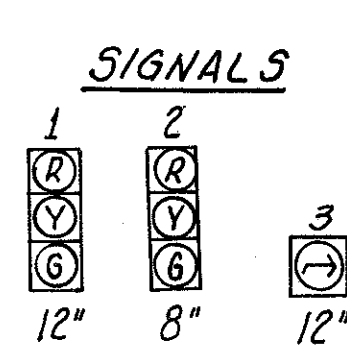

NOTE: S.L. = Stop Line

QUAN.	UNIT	ITEM	DESCRIPTION
8	EA.	G25	COVERING OF TRAFFIC SIGNAL HEADS
2	EA.	B1G	SIGNAL STRAIN POLE, 3 GA., 12" x 30'
70	L.F.	B1G	MESSENGER WIRE 7 STRAND 3/8" WITH ACCESSORIES
4.3	C.Y.	B1G	CONCRETE FOR SIGNAL SUPPORT FOUNDATION
0.8	C.Y.	B1G	CONCRETE FOR CONTROLLER AND PEDESTAL FOUNDATION
3	EA.	G25	TRAFFIC SIGNAL HEADS, 3 SECTION, 12" LENS, ONE-WAY
2	EA.	G25	TRAFFIC SIGNAL HEADS, 3 SECTION, 8" LENS, ONE-WAY
1	EA.	G25	TRAFFIC SIGNAL HEADS, 3 SECTION, 8" LENS, TWO-WAY
1	EA.	G25	TRAFFIC SIGNAL HEADS, 1 SECTION, 12" LENS, ONE-WAY
1	EA.	G25	SIGNAL CONTROLLER (2 PHASE DIGITAL SOLID STATE TRAFFIC TIMER)
1	EA.	G25	SIGNAL CONTROL CABINET, 7.7 C.F.
1	EA.	G25	10 CHANNEL DECODER
1	EA.	G25	LOOP DETECTOR AMPLIFIER
1	EA.	G25	POWER SERVICE
163	L.F.	G25	SIGNAL CABLE 12/C NO. 14 AWG IMSA 19-1-67
320	L.F.	G25	LOOP DETECTOR WIRE, NO. 14 AWG, RHW OR RHW TYPE
222	L.F.	G25	LOOP DETECTOR LEAD-IN CABLE, 2/C NO. 14 AWG, TWISTED PAIR, SHIELDED
42	L.F.	G25	POWER CABLE 3/C NO. 8 AWG STRANDED, RHW OR RHW TYPE
3	EA.	G25	CABLE SUPPORT ASSEMBLY
134	L.F.	G25	LOOP DETECTOR PAVEMENT CUTTING
3	EA.	G25	GROUND ROD
2	EA.	G25	PULL BOX 18" CIRCULAR 713.09, AS PER PLAN
63	L.F.	G25	CONDUIT 2" 713.04, TYPE III
63	L.F.	G25	TRENCH
36	L.F.	G21	24" STOP LINES, THERMOPLASTIC
28	L.F.	G21	12" STOP LINES, THERMOPLASTIC
0.09	MI.	G21	CENTER LINES, DOUBLE: SOLID-DASHED, THERMOPLASTIC