


- ◆ TAPER TO BEGIN BIKEWAY SEE DETAIL SHT. 17
- ◆ POWER POLE TO BE RELOCATED BY OTHERS
- ◆ GUARDRAIL LOCATED ALONG OUTSIDE EDGE OF SHOULDER, TYP.
- ◆ 25' BUTT JOINT, TYP.
- ◆ PROPOSED WIDTH SHOWN IS EQUAL TO THE SUM OF BIKE LANE WIDTH + 1 FT. WIDTH (MAX) OF ROADWAY TO BE REPAIRED. TYPICAL ALL SHEETS.

REF	LOCATION	EACH	SQ. YD.	LIN. FT.	EACH
R-1	STA 126+41.85	1			
R-2	STA 132+20 TO 135+00, LT			280	
R-3	STA 125+95, RT.	1	3		
R-4	STA 131+61.5 TO 135+00, LT.			311.5	1
TOTALS		1	3	280	1

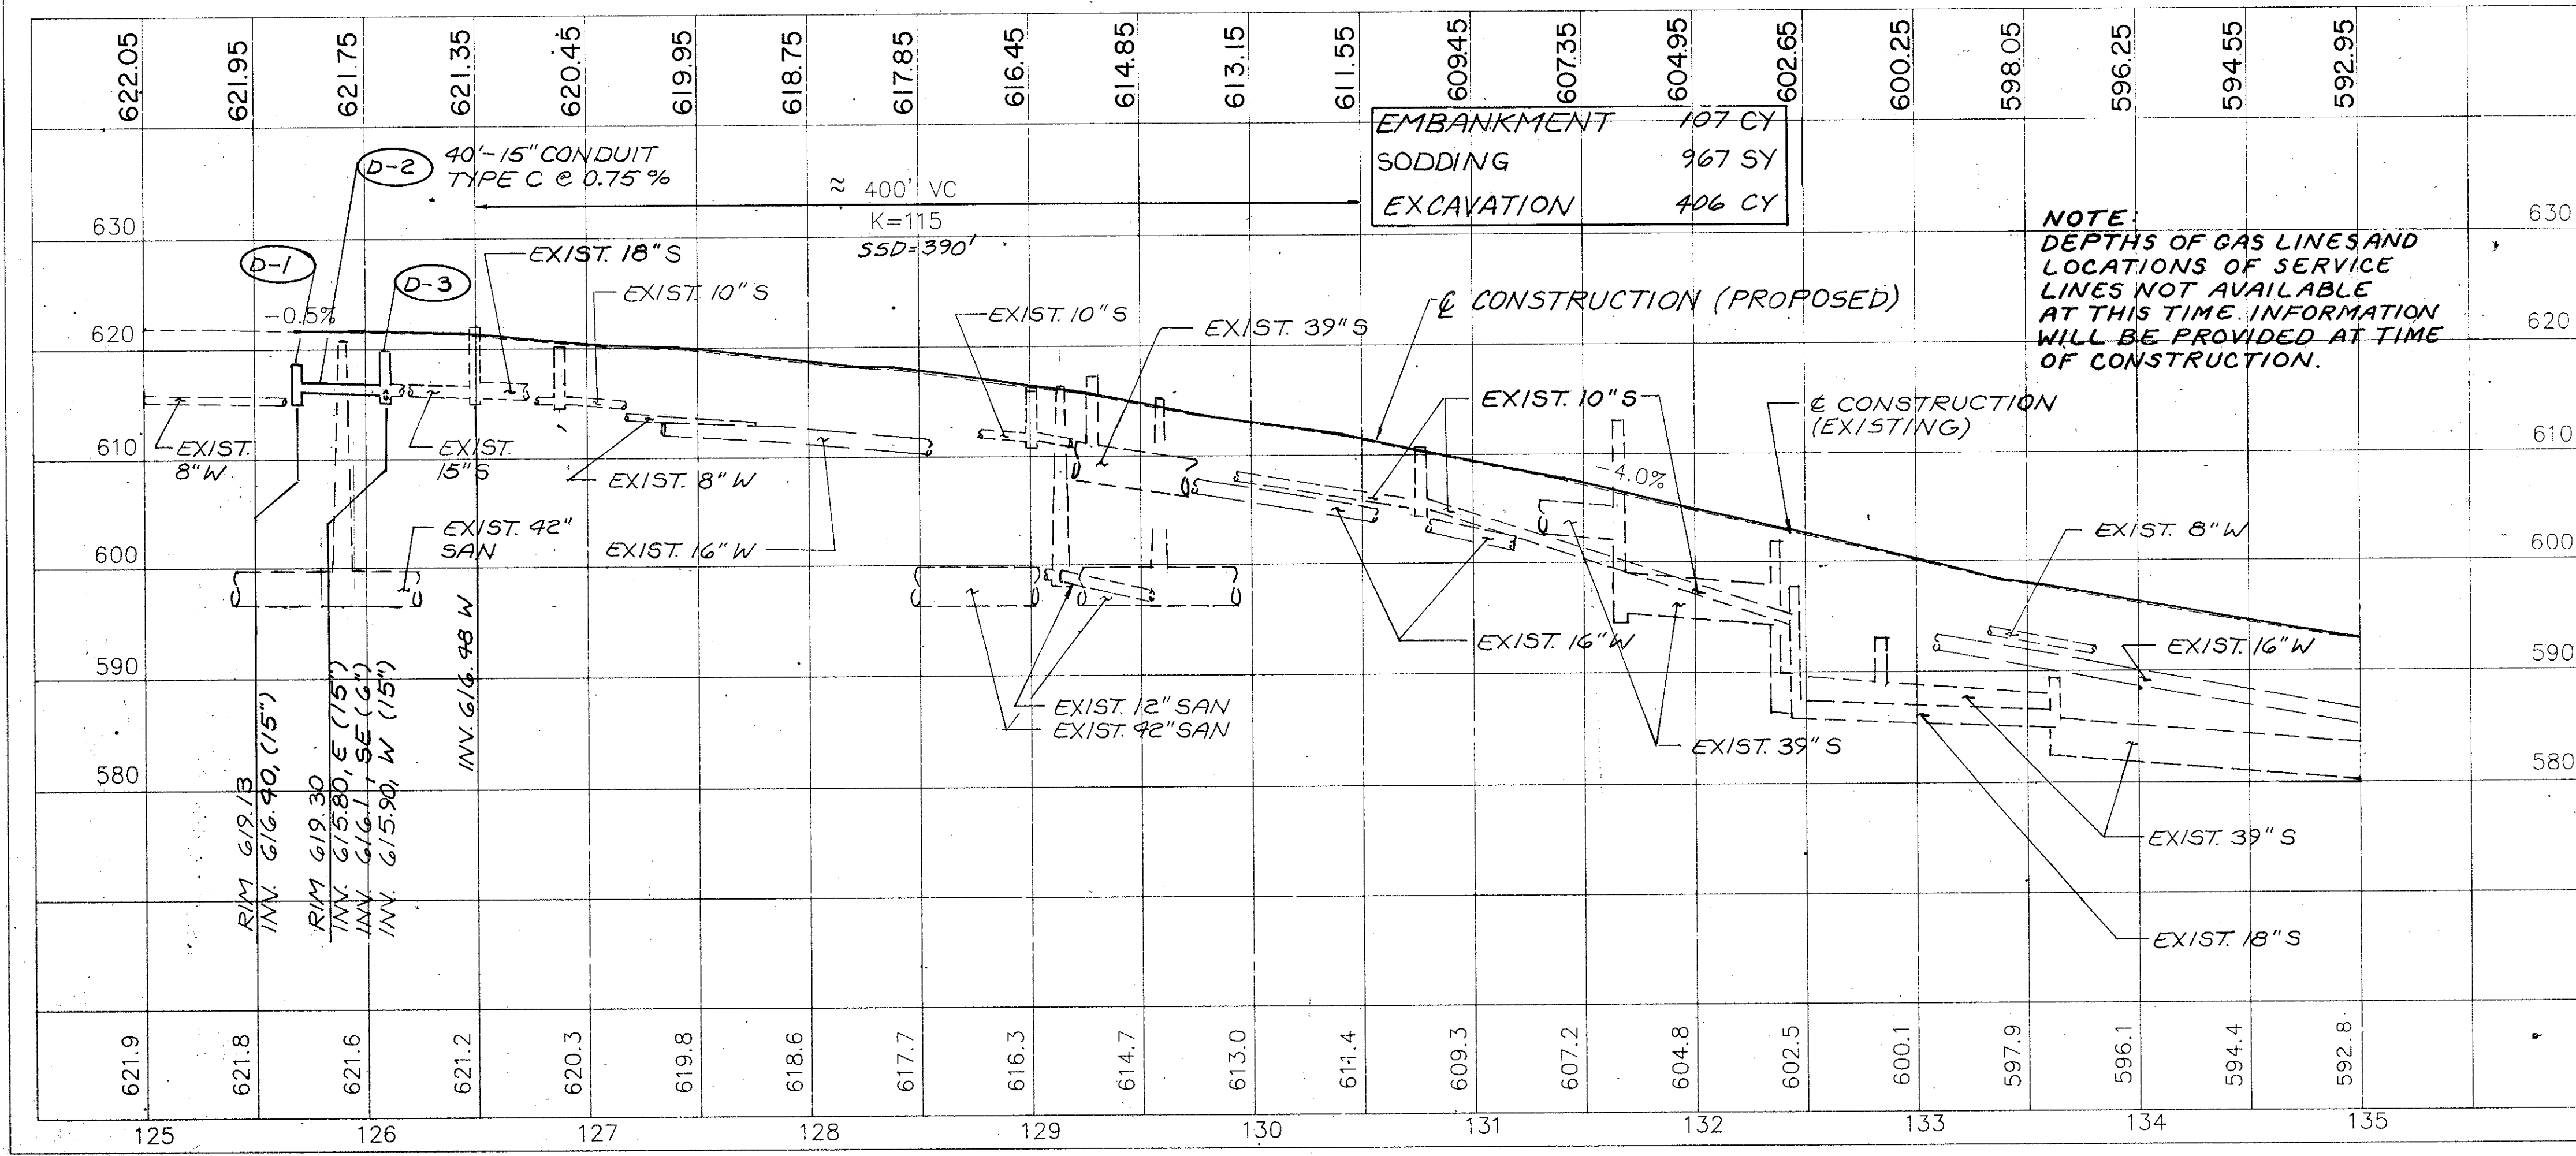

REF	LOCATION	LIN. FT.	EACH	EACH	LIN. FT.
D-1	STA. 125+70, 40' RT			1	
D-2	STA. 125+70 TO 126+09, RT.	40			
D-3	STA. 126+09, 57' RT.	4		1	
D-4	STA. 126+57 TO 126+68, LT.				20
D-5	STA. 127+48, 33' RT.		1		
D-6	STA. 126+86, 15' LT.		1		
D-7	STA. 128+97, 15' LT.		1		
D-8	STA. 130+77, 14' LT.		1		
D-9	STA. 129+10, LT.		1		
D-10	STA. 125+93, RT.		1		
TOTALS		44	6	2	20

S.R. 283 PLAN & PROFILE BEGIN PROJECT TO STA. 135+00