

SCHEMATIC LAYOUT PLAN


FED. RD. DIVISION	STATE	PROJECT	2
2	OHIO		212

LAKE COUNTY
LAK-44-722

NOTE: Marker to be furnished and erected on the right by the State of Ohio before acceptance of this project.

BEGIN PROJECT
STA. 36+99.10

S - 1183 - 3

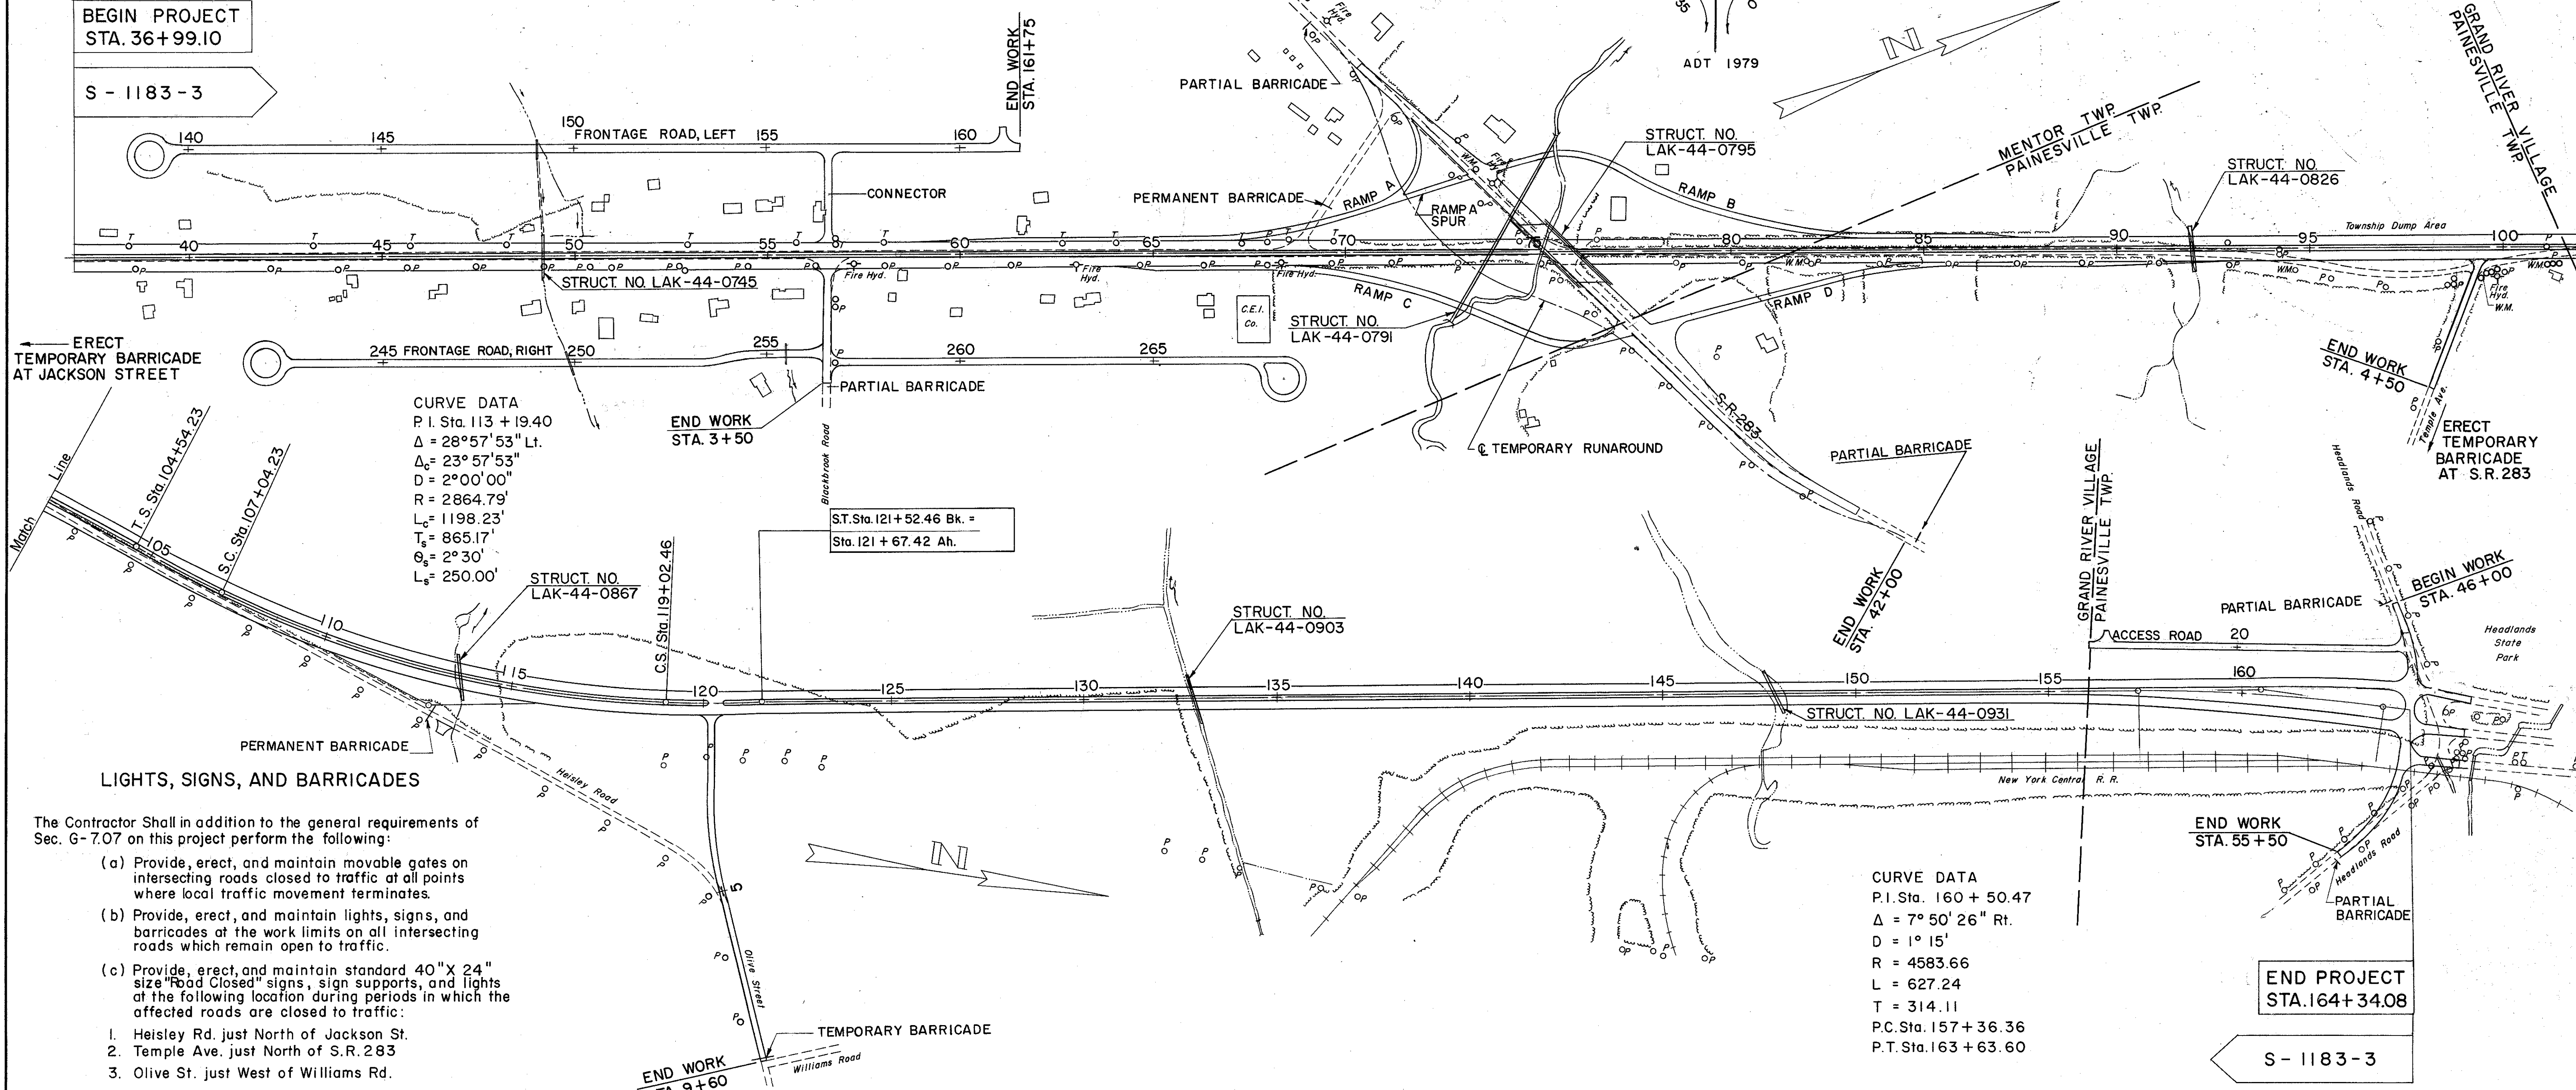

CURVE DATA
 P.I. Sta. 113 + 19.40
 $\Delta = 28^\circ 57' 53''$ Lt.
 $\Delta_c = 23^\circ 57' 53''$
 $D = 2^\circ 00' 00''$
 $R = 2864.79'$
 $L_c = 1198.23'$
 $T_s = 865.17'$
 $\theta_s = 2^\circ 30'$
 $L_s = 250.00'$

ST. Sta. 121 + 52.46 Bk. =
 Sta. 121 + 67.42 Ah.

CURVE DATA
 P.I. Sta. 160 + 50.47
 $\Delta = 7^\circ 50' 26''$ Rt.
 $D = 1^\circ 15'$
 $R = 4583.66$
 $L = 627.24$
 $T = 314.11$
 P.C. Sta. 157 + 36.36
 P.T. Sta. 163 + 63.60

LIGHTS, SIGNS, AND BARRICADES

The Contractor shall in addition to the general requirements of Sec. G-7.07 on this project perform the following:

- (a) Provide, erect, and maintain movable gates on intersecting roads closed to traffic at all points where local traffic movement terminates.
- (b) Provide, erect, and maintain lights, signs, and barricades at the work limits on all intersecting roads which remain open to traffic.
- (c) Provide, erect, and maintain standard 40" X 24" size "Road Closed" signs, sign supports, and lights at the following location during periods in which the affected roads are closed to traffic:
 1. Heisley Rd. just North of Jackson St.
 2. Temple Ave. just North of S.R. 283
 3. Olive St. just West of Williams Rd.

Lights, barricades, and danger and warning signs shall be provided at locations shown above in accordance with Sec. G-7.07. Barricades and gates shall be as detailed on standard construction drawing No. G-7.07. Sign supports and lights for "Road Closed" signs shall be as detailed in the "Ohio Manual of uniform traffic control devices." Payment for providing, erecting, maintaining, and removing barricades, gates, light, signs, and sign supports shall be included in the lump sum price for "Maintaining Traffic."

END PROJECT
STA. 164+34.08

S - 1183 - 3

NOTE: Marker to be furnished and erected on the left by the State of Ohio before acceptance of this project.