



# LOCATION PLAN

## LAK - 44 - 7.22

### PAINESVILLE TOWNSHIP      MENTOR TOWNSHIP

### VILLAGE OF GRAND RIVER

### LAKE COUNTY, OHIO

LIMITED ACCESS

RECEIVED \_\_\_\_\_ TIME \_\_\_\_\_

RECORDED \_\_\_\_\_

PLAT BOOK N PAGE 62-1

SIGNED \_\_\_\_\_ RECORDER LAKE COUNTY, OHIO

FEE \_\_\_\_\_ PAID \_\_\_\_\_

SIGNED A. B. Damon  
DIVISION DEPUTY DIRECTOR

DATE 4/25/61


SIGNED John C. Brillhart  
JOHN C. BRILHART, REGISTERED SURVEYOR NO. 4659  
CAPITOL ENGINEERING ASSOCIATES

DATE 2-27-61

198  
212

① R/W CURVE DATA  
S.R. 44  
P.I. STA. 106+20.81  
P.C. STA. 105+37.36  
P.C.C. STA. 107+04.23  
Δ = 2°30'00" LT.  
D = 1°29'53.3"  
R = 3824.46'  
L = 166.87'  
T = 83.45'  
CH. = 166.86' (N.22°14'47"E.)

② R/W CURVE DATA  
S.R. 44  
P.I. STA. 113+12.23  
P.C.C. STA. 107+04.23  
Δ = 23°57'53" LT.  
D = 2°00'00"  
R = 2864.79'  
L = 1198.23'  
T = 608.00'  
CH. = 1189.51' (N.9°00'50.5"E.)

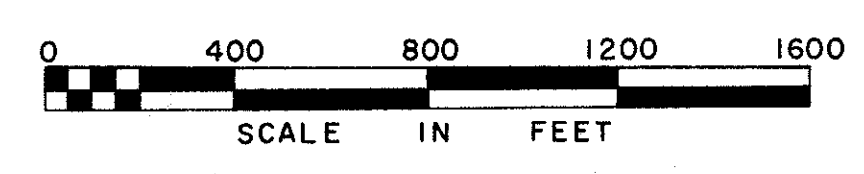

NOTE:  
FOR DETAIL "L" SEE SHEET 199

③ R/W CURVE DATA  
S.R. 44  
P.I. STA. 119+85.91  
P.C.C. STA. 119+02.46  
P.T. STA. 120+69.33  
Δ = 2°30'00" LT.  
D = 1°29'53.3"  
R = 3824.46'  
L = 166.87'  
T = 83.45'  
CH. = 166.86' (N.4°13'06"W.)


④ CURVE DATA  
S.R. 44  
P.I. STA. 160+50.47  
P.C. STA. 157+36.36  
P.T. STA. 163+63.60  
Δ = 7°50'26" RT.  
D = 1°15'00"  
R = 4583.66'  
L = 627.24'  
T = 314.11'  
CH. = 626.75' (N.1°32'53"W.)

⑤ CURVE DATA  
RELOC. OLIVE STREET  
P.I. STA. 4+10.08  
P.C. STA. 2+13.55  
P.T. STA. 6+04.16  
Δ = 15°37'30" LT.  
D = 4°00'00"  
R = 1432.40'  
L = 390.61'  
T = 196.53'  
CH. = 389.42'

⑥ CURVE DATA  
RELOC. HEADLANDS RD.  
P.I. STA. 48+39.25  
P.C. STA. 47+44.76  
P.T. STA. 49+30.47  
Δ = 26°00'00" RT.  
D = 14°00'00"  
R = 409.26'  
L = 185.71'  
T = 94.49'  
CH. = 184.13'

⑦ CURVE DATA  
RELOC. HEADLANDS RD.  
P.I. STA. 52+53.67  
P.C. STA. 50+86.34  
P.T. STA. 54+04.02  
Δ = 44°28'30" RT.  
D = 14°00'00"  
R = 409.26'  
L = 317.68'  
T = 167.33'  
CH. = 309.77'

⑧ CURVE DATA  
RECONSTR. MORTON SALT CO. RD.  
P.I. STA. 1+02.29  
P.C. STA. 0+69.26  
P.T. STA. 1+35.26  
Δ = 5°56'24" LT.  
D = 9°00'  
R = 636.62'  
L = 66.00'  
T = 33.03'

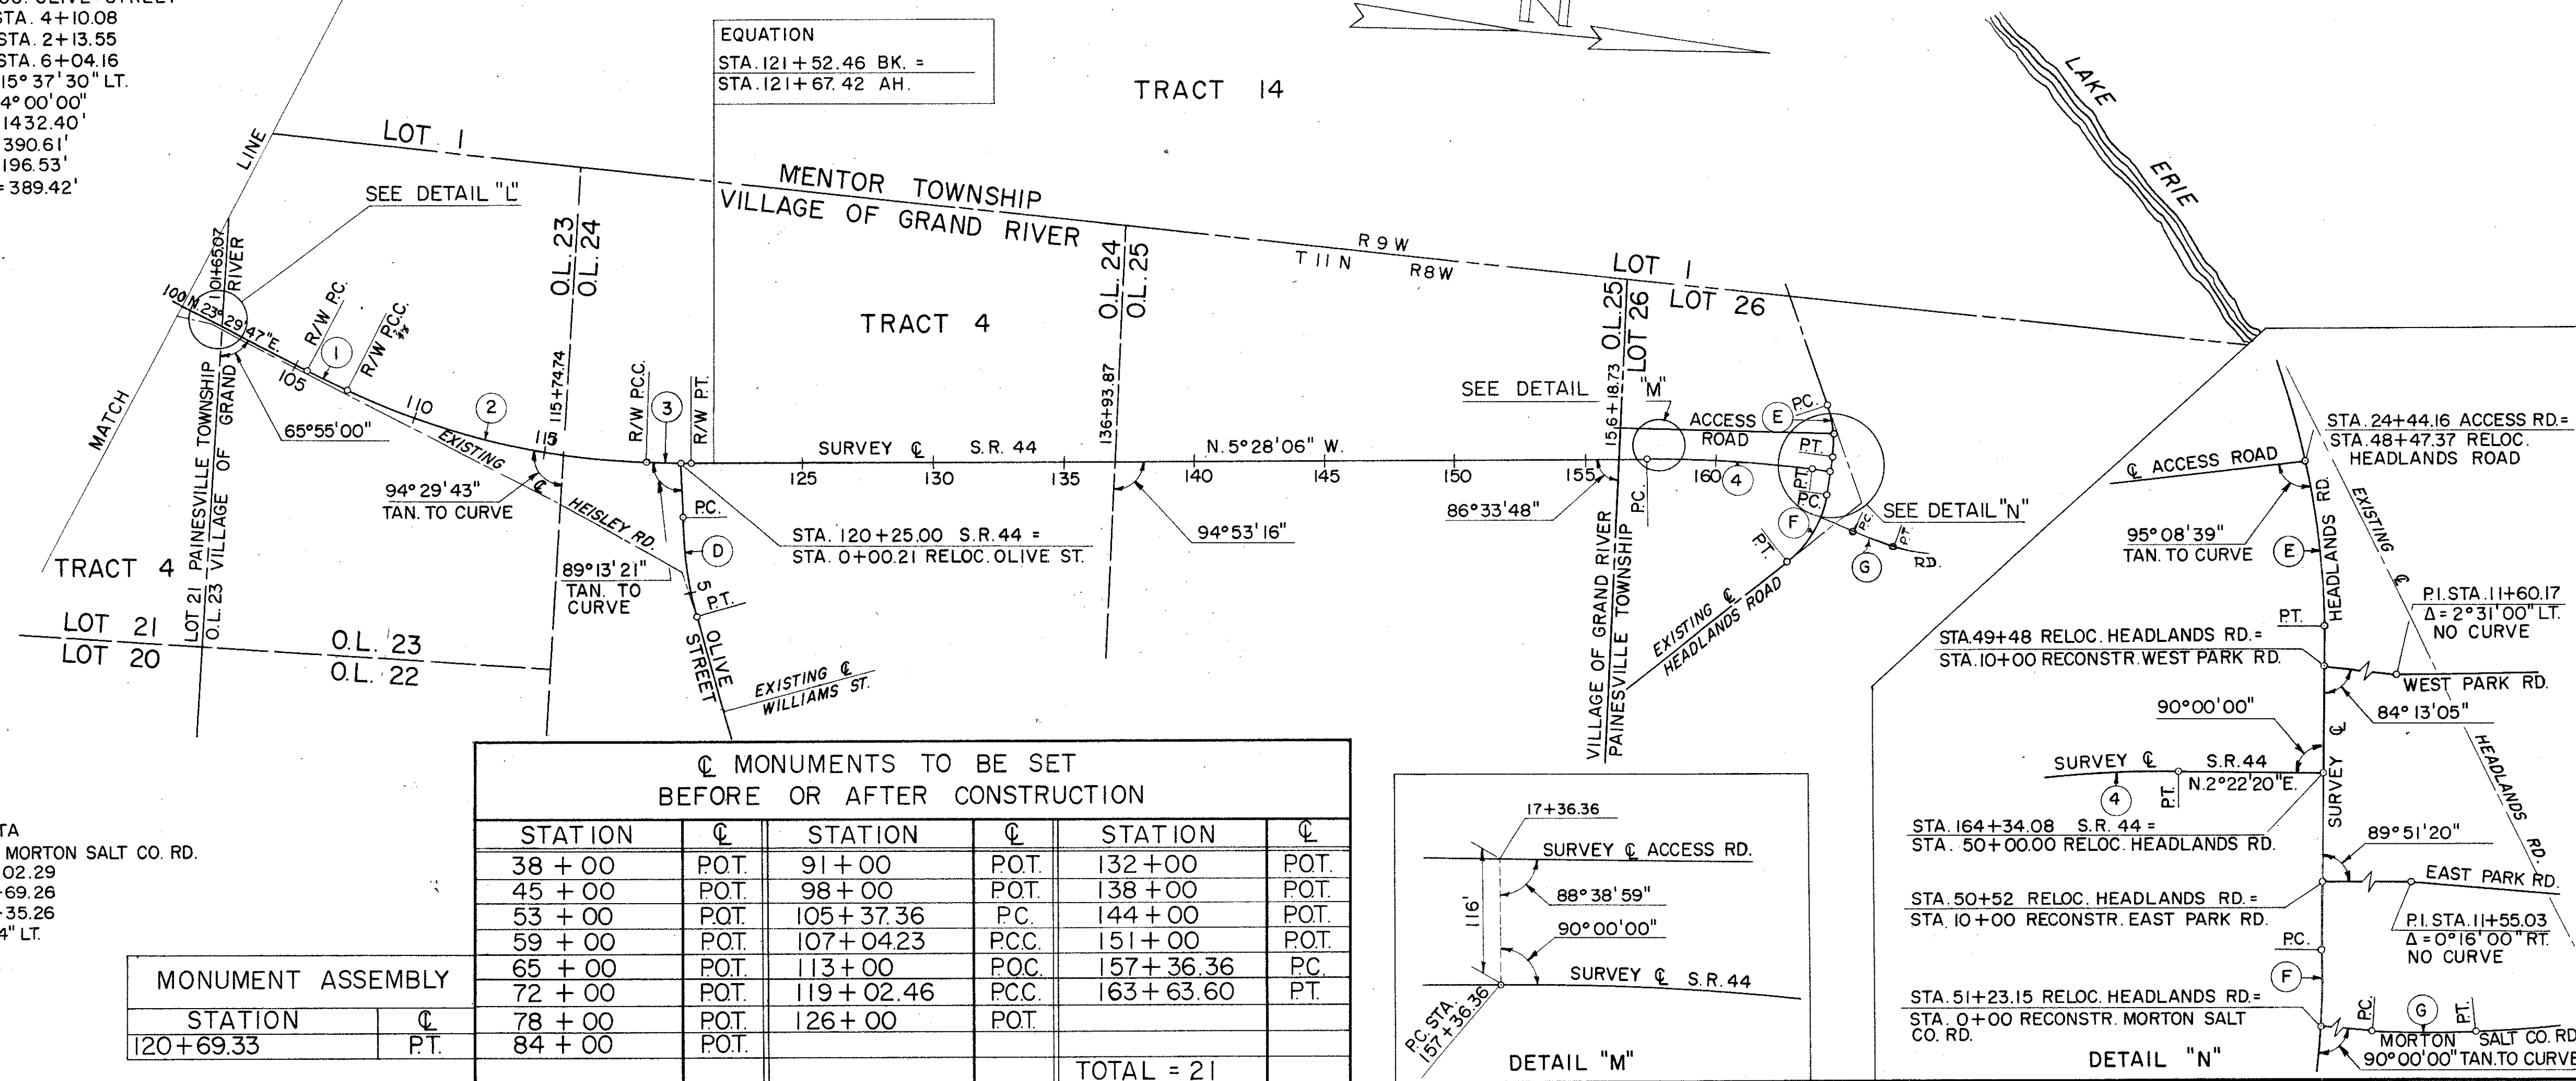

☉ MONUMENTS TO BE SET BEFORE OR AFTER CONSTRUCTION

STATION	☉	STATION	☉	STATION	☉
38+00	POT.	91+00	POT.	132+00	POT.
45+00	POT.	98+00	POT.	138+00	POT.
53+00	POT.	105+37.36	P.C.	144+00	POT.
59+00	POT.	107+04.23	P.C.C.	151+00	POT.
65+00	POT.	113+00	P.O.C.	157+36.36	P.C.
72+00	POT.	119+02.46	P.C.C.	163+63.60	P.T.
78+00	POT.	126+00	POT.		
84+00	POT.				
TOTAL = 21					

MONUMENT ASSEMBLY

STATION	☉
120+69.33	P.T.

