


ANDERSON LANE INTERSECTION PAVEMENT
 SAME AS STABILIZED BERM - 6" OF I-18
 WITH SURFACE APPLICATION OF 0.6 LB.
 CALCIUM CHLORIDE PER SQ. YD.
 PROPOSED FUTURE CONSTRUCTION NORTH OF S.R.44;
 NOT INCLUDED IN PROJECT F-388 (10)

LAKE COUNTY
 LAK-44-170

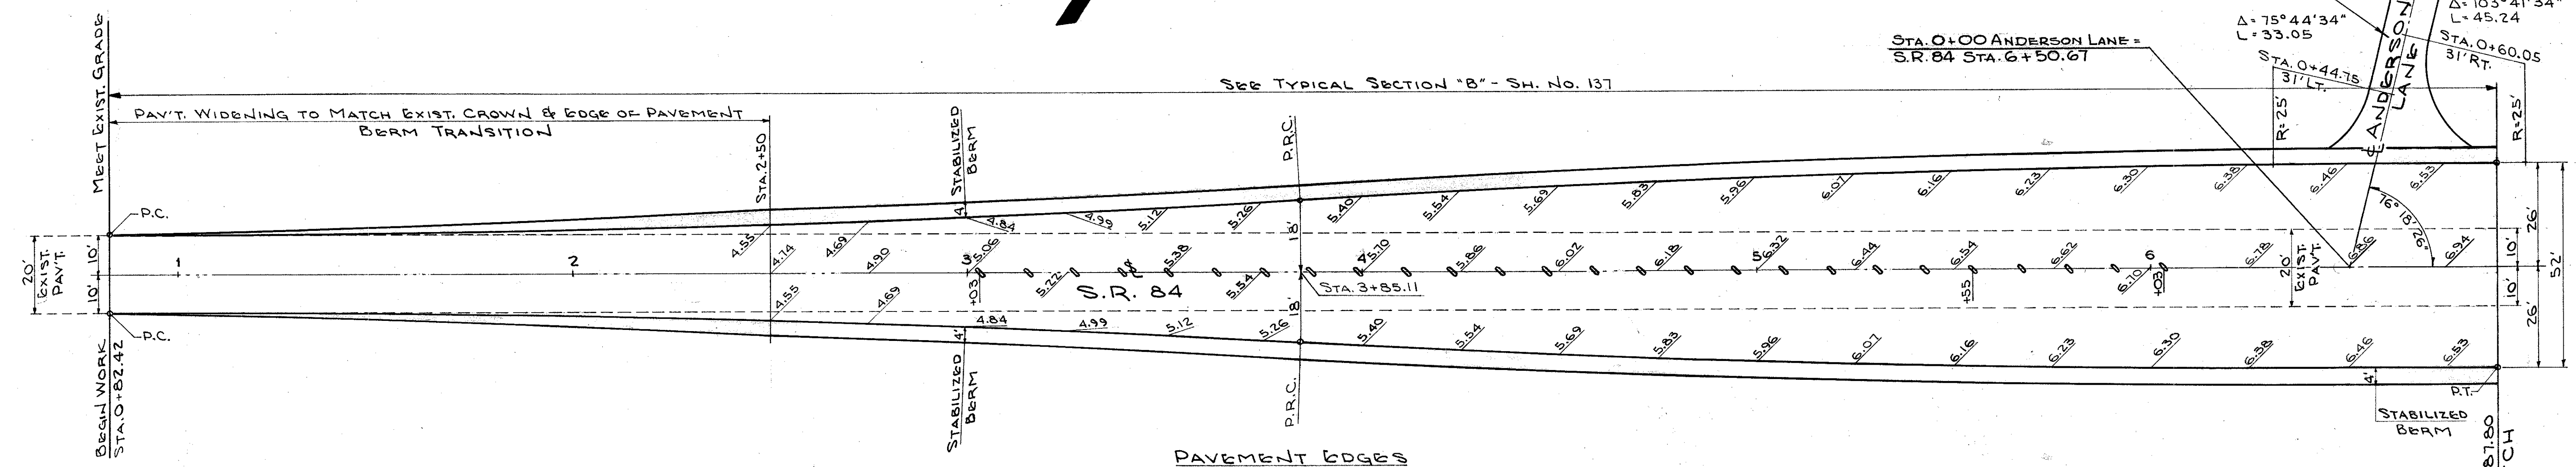

PAVEMENT EDGES
 CURVE DATA


$\Delta = 3^{\circ}01'42''$
 $D = 1^{\circ}00'00''$
 $R = 5729.58$
 $T = 151.45$
 $L = 302.82$
 $E = 2.00$

S.R. 84 - STA. 0+82.42 TO STA. 8+47.51
 ESTIMATED QUANTITIES - CODE 7221

ITEM	DESCRIPTION	QUANTITY
S-15	CALCIUM CHLORIDE, FURNISHED & APPLIED, FOR STABILIZING SHOULDERS - SEE NOTE IN PROPOSAL	0.70 TONS
B-35	SEALING VERTICAL FACE OF EXISTING PAVEMENT	1230.76 LIN. FT.
B-35	ASPHALTIC CONCRETE LEVELING COURSE - (70-85)	87.74 CU. YD.
B-119	CRUSHED AGGREGATE BASE COURSE	274.25 CU. YD.
I-18	STABILIZED CRUSHED AGGREGATE SHOULDERS & APPROACHES	111.65 CU. YD.
I-12	CONCRETE CURB - TYPE 2A	96.85 LIN. FT.
I-21	PORTLAND CEMENT CONCRETE MEDIAN PAVEMENT - TYPE 1	10.41 SQ. YD.
I-22	SUBBASE	450.07 CU. YD.
I-23	PRECAST WHITE PORTLAND CEMENT CONCRETE TRAFFIC DIVIDERS	26 EACH
T-35	ASPHALTIC CONCRETE SURFACE COURSE - TYPE "A" (70-85)	67.82 CU. YD.
E-101	COMPACTED SUBGRADE	1096.33 SQ. YD.
T-71	REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT	1260.43 SQ. YD.
SPEC.	MIXING CALCIUM CHLORIDE AND CRUSHED AGGREGATE	670 SQ. YD.
T-30	BITUMINOUS PRIME COAT: SEC. M-5.3, MC-00 OR MC-1, OR SEC. M-5.7, RT-20 OR RT-3	432 GAL.

ANDERSON LANE INTERSECTION
 NOT INCLUDED WITH PROJECT F-388(10)
 ESTIMATED QUANTITIES

ITEM	DESCRIPTION	QUANTITY
M-10	CALCIUM CHLORIDE, FURNISHED & APPLIED, FOR STABILIZING SHOULDERS & PAVEMENT	.208 TON
I-18	STABILIZED CRUSHED AGGREGATE SHOULDERS & APPROACHES	12.82 CU. YD.

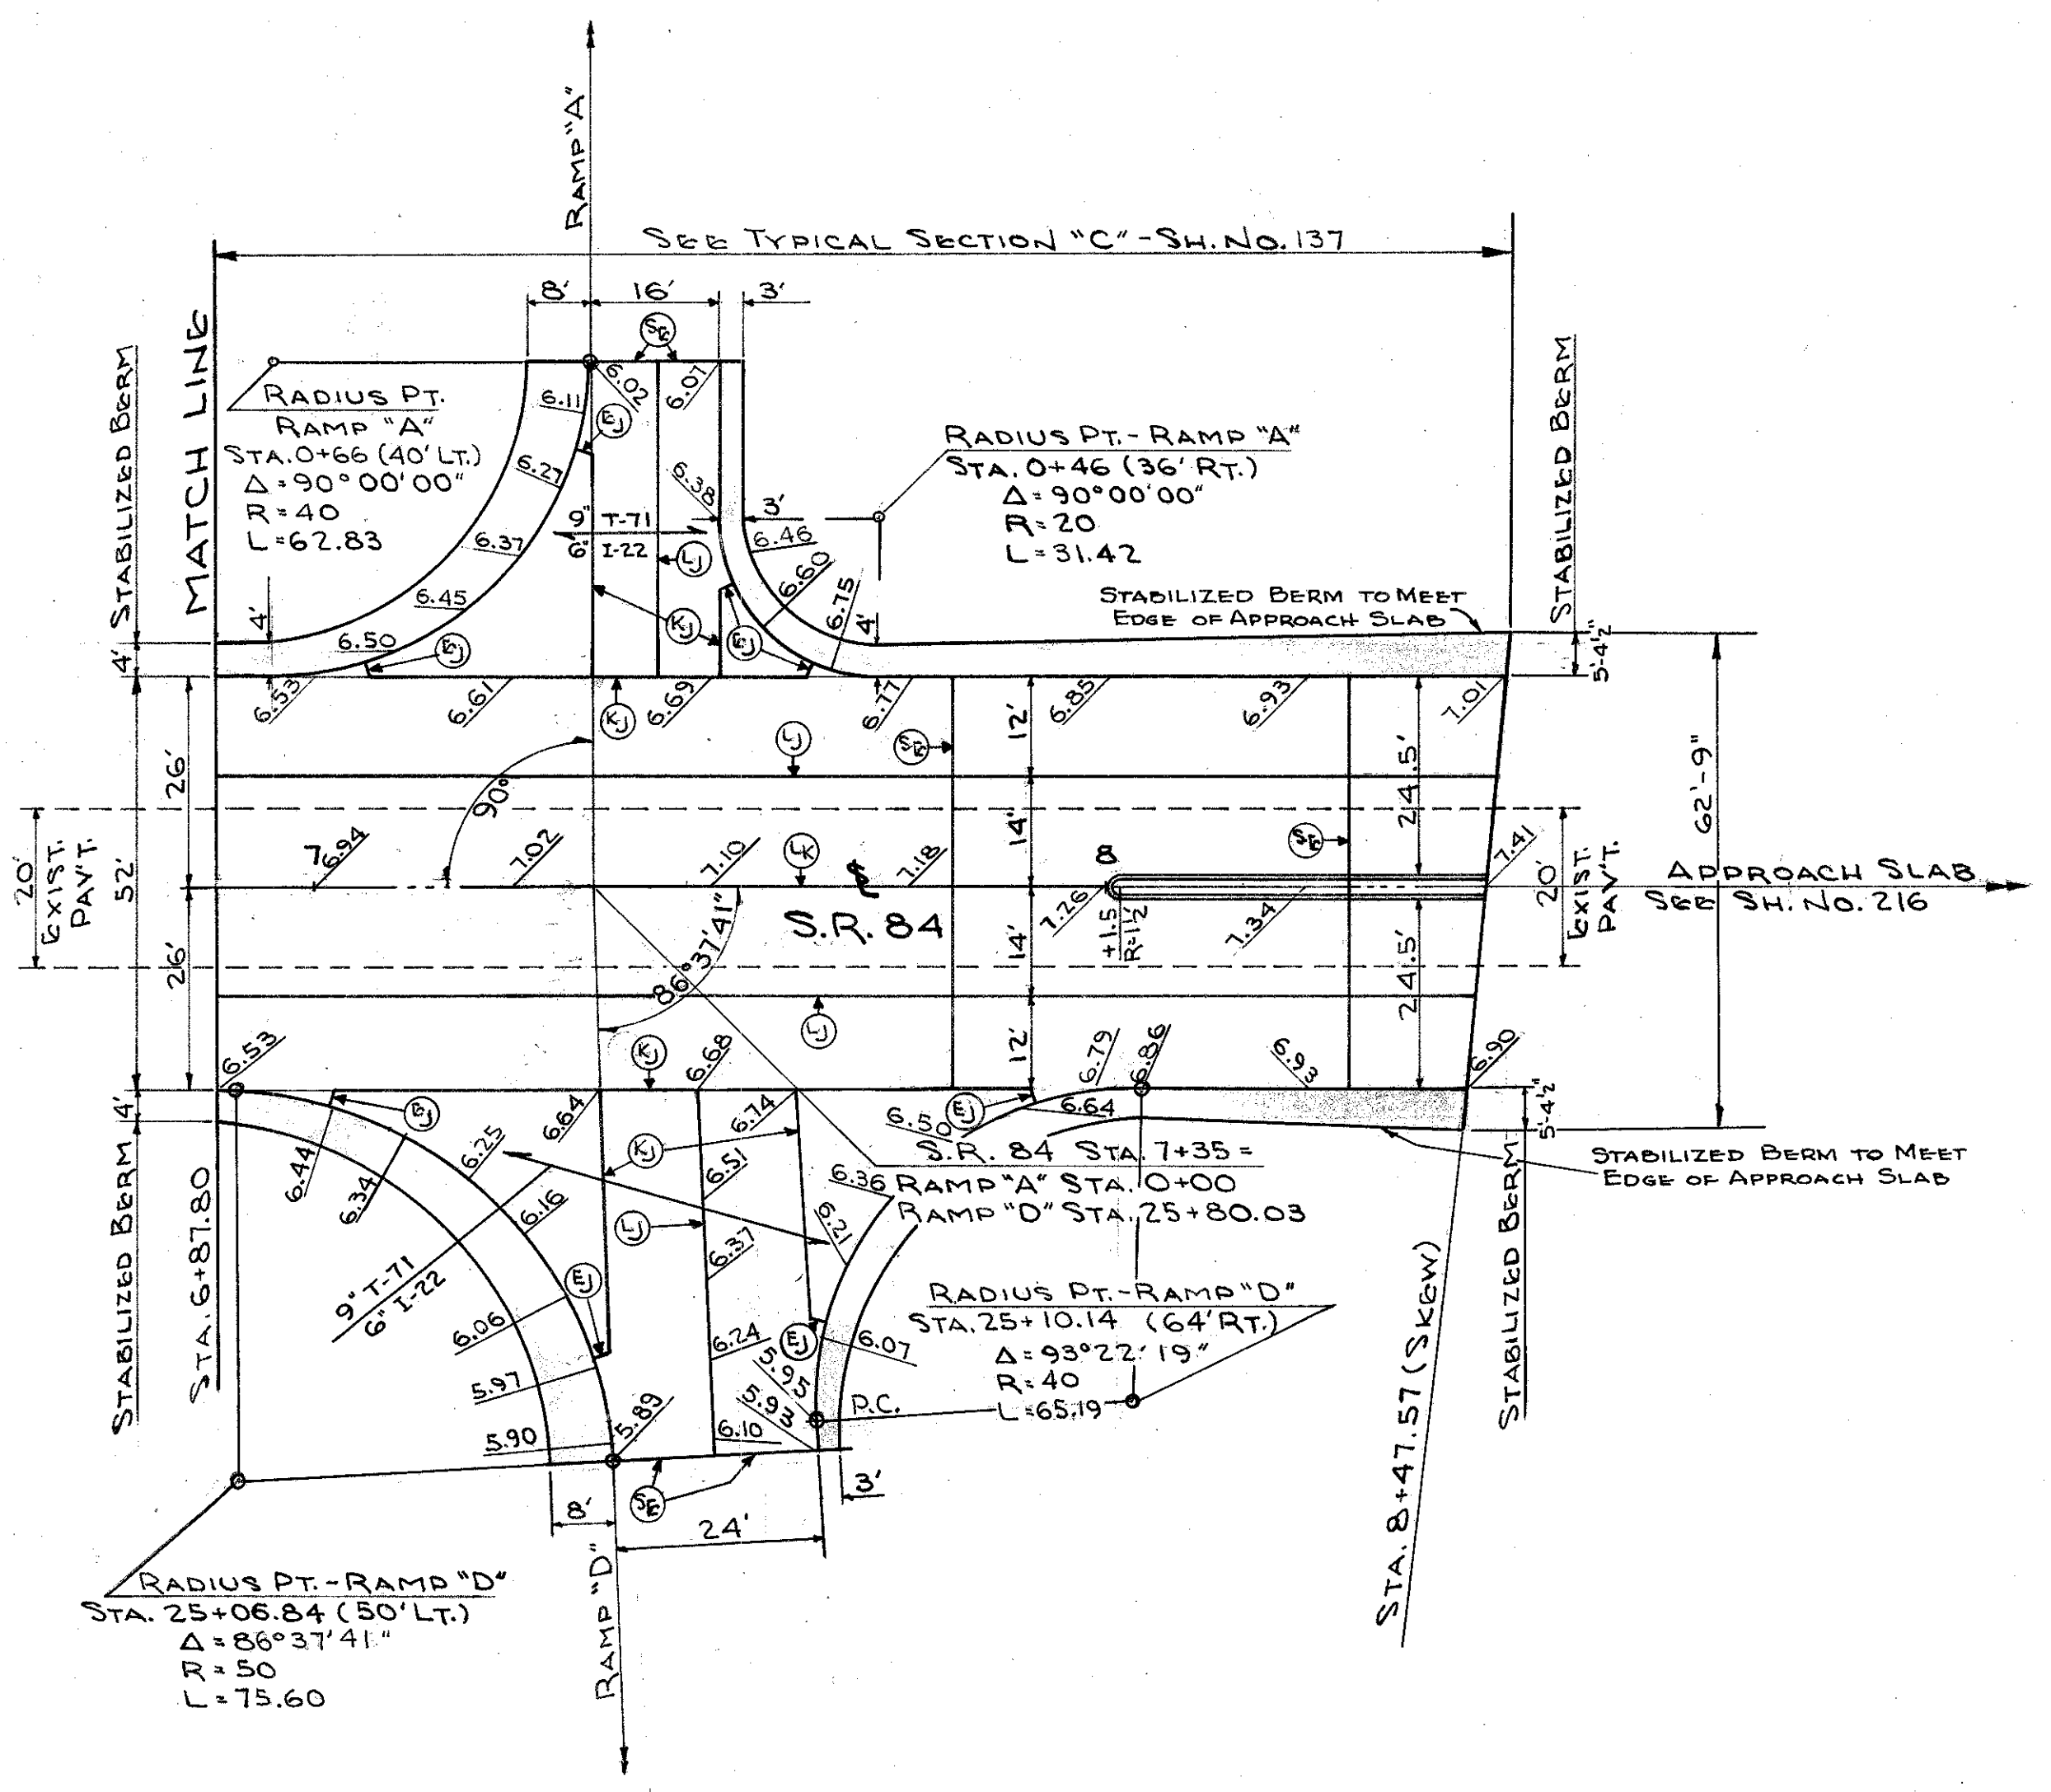

JOINT SYMBOLS
 SEE SHEET NO. 132

NOTES: UNLESS OTHERWISE SPECIFIED THE FOLLOWING NOTES APPLY -
 FOR TRUE ELEVATIONS ADD 750.00 TO THOSE SHOWN, UNLESS NOTED.
 ELEVATIONS ARE GIVEN TO TOP OF PAVEMENT AT JOINTS & EDGES AND AT EVEN 50', 25' OR 10' STATIONS.
 DIMENSIONS ARE GIVEN TO JOINTS, EDGE OF PAVEMENT OR FACE OF CURB.
 ALL RADII GIVEN TO FACE OF CURB OR EDGE OF PAVEMENT.
 MINIMUM LENGTH OF PAVEMENT JOINTS = 2'-0"

TRYGVE HOFF & ASSOCIATES
 ENGINEERS
 1922 EAST 107TH STREET CLEVELAND, OHIO

S.R. 84
 PAVEMENT DETAILS

SCALE 1" = 20'	DATE				
DESIGNED	TRACED	CHECKED	REVIEWED	DATE	REVISED
D.M.J.	[Signature]	G.W.	T.L.L.	10/11/58	