

LAKE COUNTY
S.H. 520 SEC. PAINESVILLE (PT.)
S.H. 744 SEC. PAINESVILLE (PT.)
& FAIRPORT (PT.)

STRUCTURES 20' SPAN & UNDER				
Mark	Station	Type	Size	Sheet No.
C-4	45+94	Culvt. Ext.	12'x12'	26



REMOVAL OF TREES				
Station	Side	Distance	Size	Kind
47+35	R+	22'	18"	Maple
Total = 1				

DRIVES AND APPROACHES				
Item	Station	Side	I-11 Cu. Yds	
D-1	45+65	R+	1.9	
D-2	47+15	R+	1.9	
Total			3.8	

STORM SEWERS							
Item	Side	Station From	Station To	L.F. 10'	10'-30" Bend Each	Type A Rip Rap Sq. Yds	Rem. Port. Exist. Man. Cu. Yds.
S-1	Lt.	46+35	46+50	16	1	2.0	0.2
S-2	Rt.	48+15	49+00	25		2.0	0.2
S-3	Lt.	49+03	49+18	16	1	2.0	0.2
Totals				57	2	6.0	0.6

GUARD RAIL			
Station to Station	Side	Remove & Rebuild L.F.	
45+00 to 46+12	Lt.	112 L.F.	See Sheet 7
Total		112 L.F.	

SEALING ONLY EDGE OF EXIST. PAV'T.			
Station to Station	Side	Lin. Ft.	
45+00 to 47+00 (High St)	Lt.	424.21	
47+00 to 57+00 (High St)	Lt.	511.35	
45+00 to 57+00	Rt.	1183.44	
Total		2519.00	

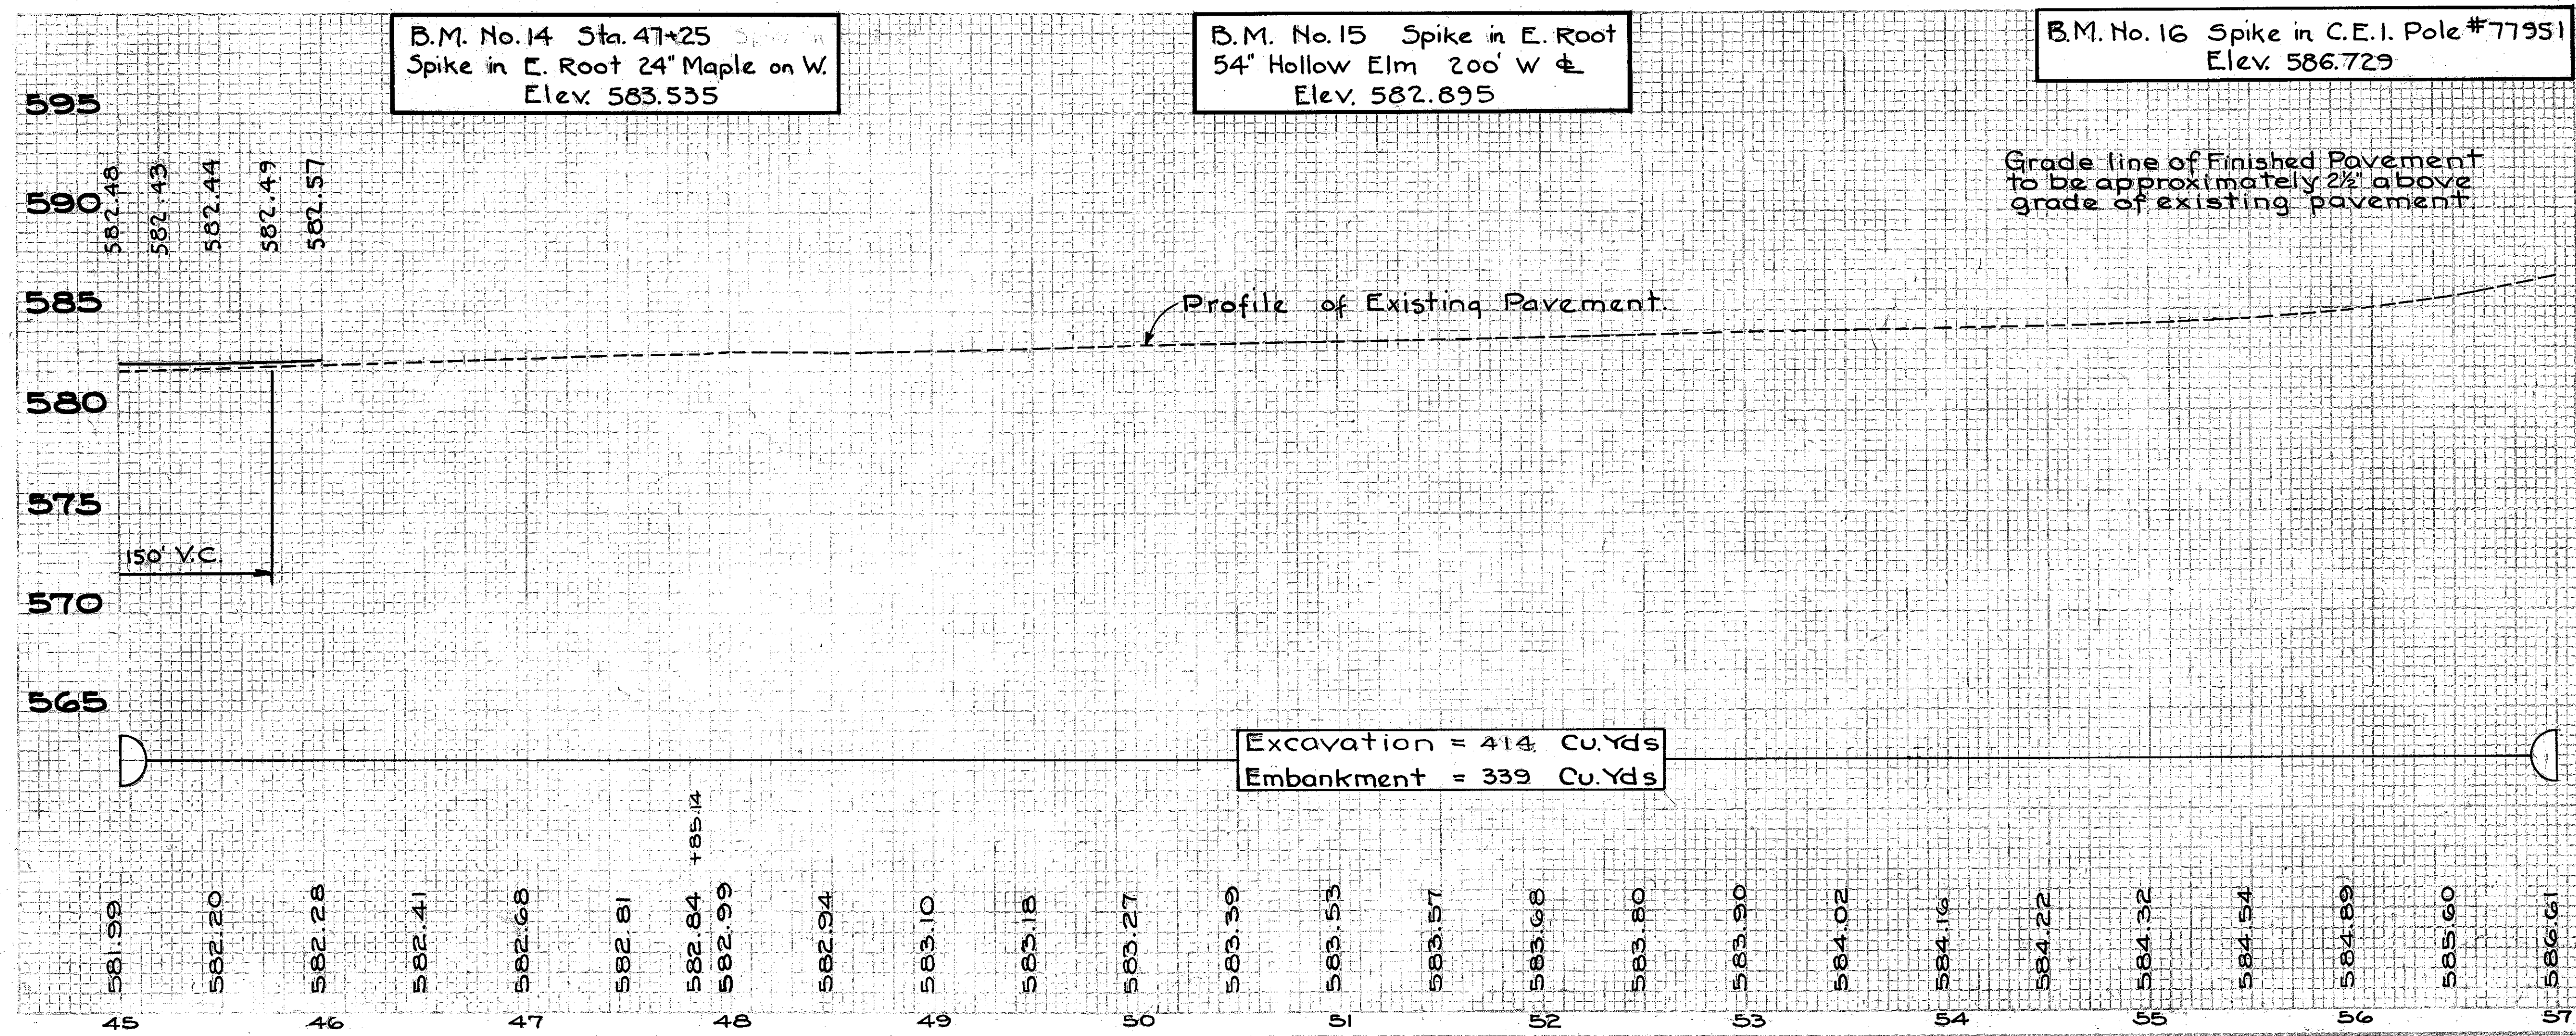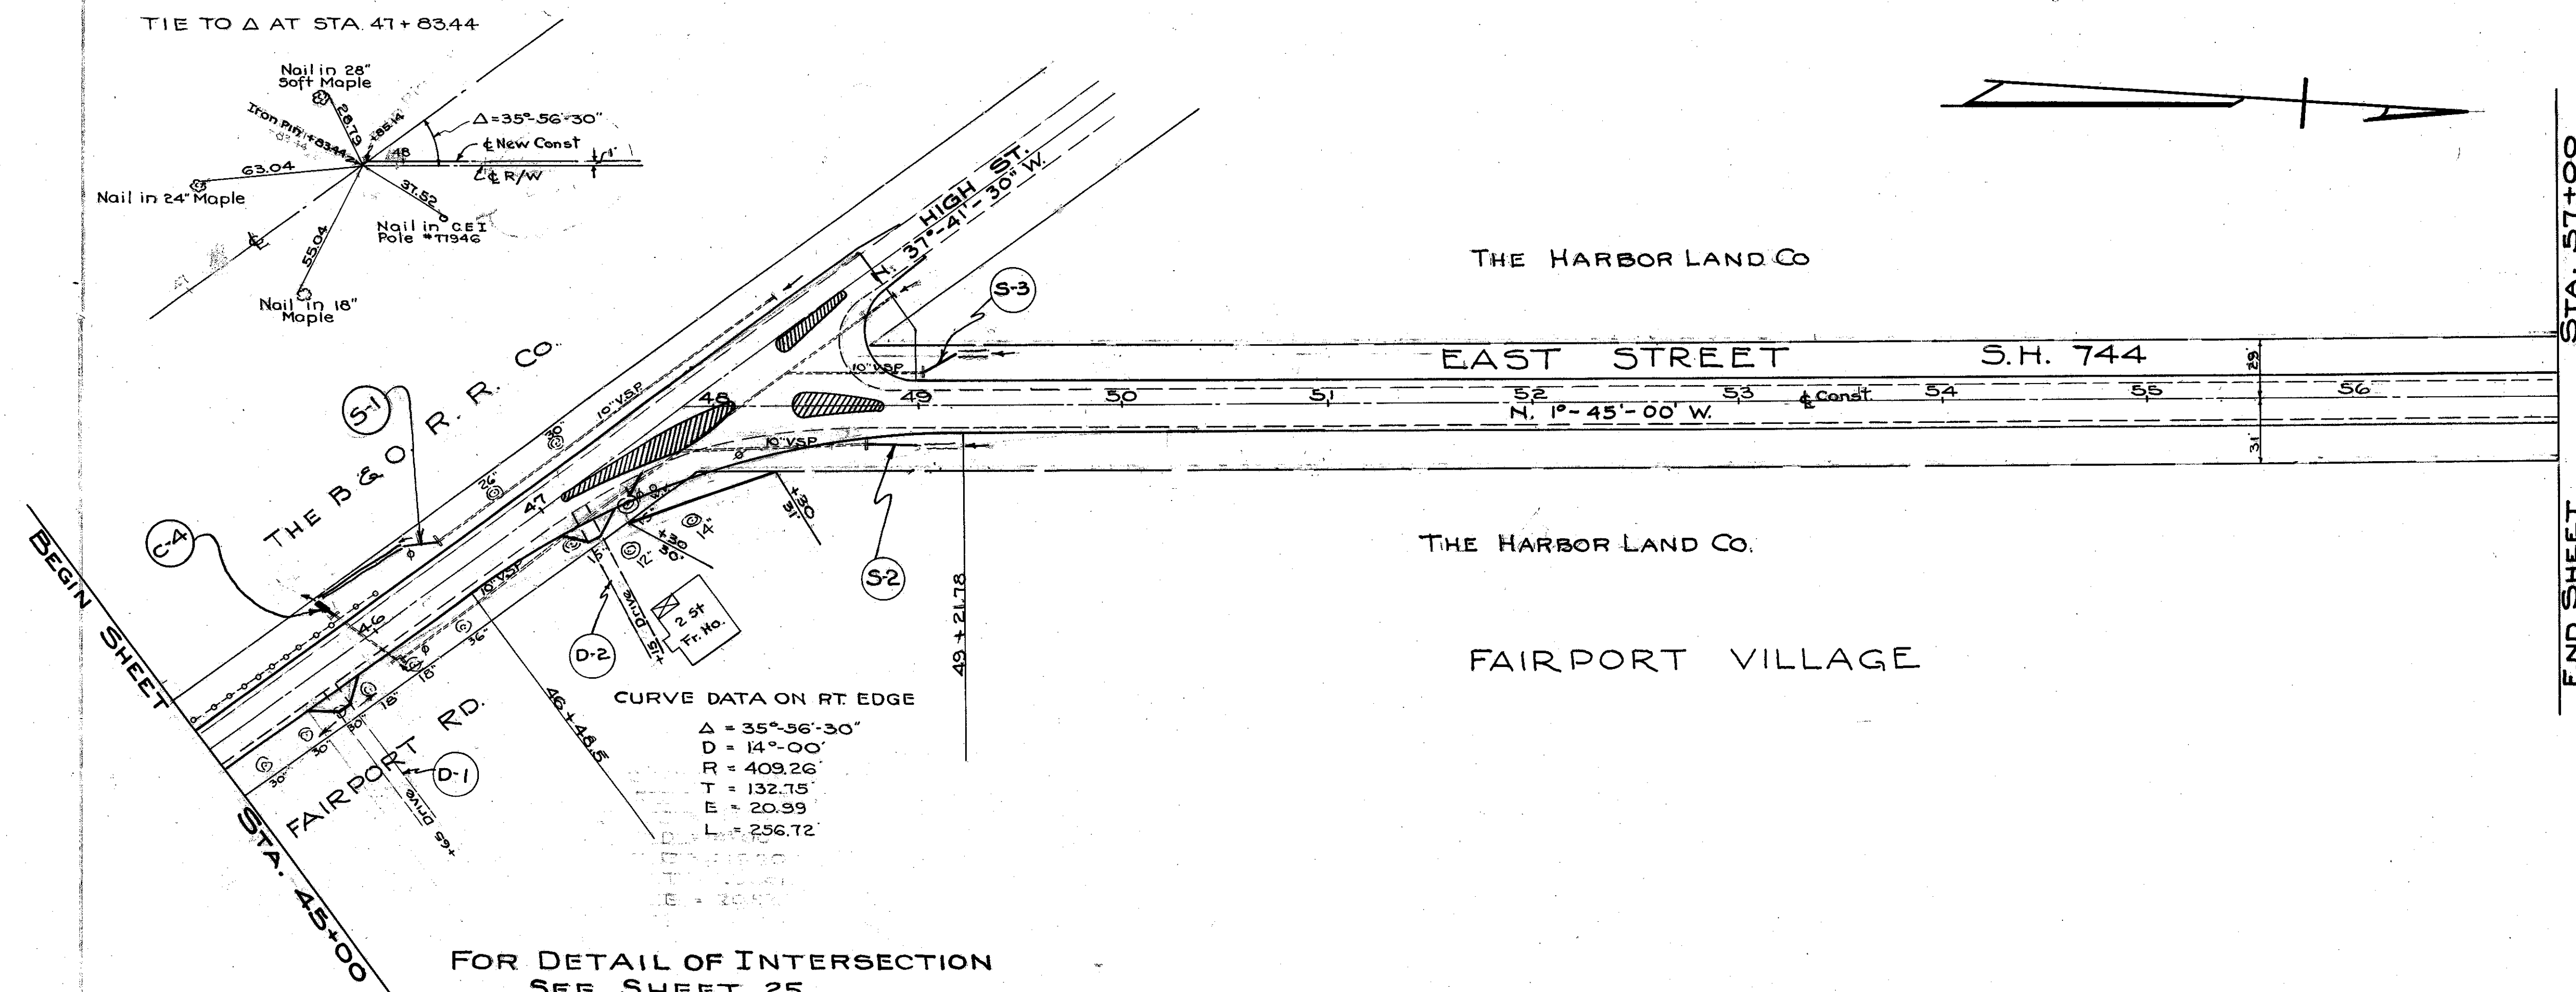

PLAN & PROFILE STA. 45+00 TO STA. 57+00