


ITEM	DESCRIPTION	UNIT	QUANTITY
605	6" SHALLOW PIPE UNDERDRAIN AS PER PL	LF.	
605	6" UNCLASSIFIED PIPE UNDERDRAIN AS PER PL	LF.	
604	MANHOLE RECONSTRUCTED TO GRADE	EA.	
604	CATCH BASIN STD NO. 3A MOD AS PER PLAN	EA.	
604	CATCH BASIN STD NO. 3 MOD AS PER PLAN	EA.	
604	MANHOLE STD NO. 3 MOD AS PER PLAN	EA.	
604	MANHOLE STD NO. 3	EA.	
603	6" CONDUIT TYPE F, AS PER PLAN	LF.	
603	12" CONDUIT TYPE B, AS PER PLAN	LF.	
603	12" CONDUIT TYPE C, AS PER PLAN	LF.	
603	18" CONDUIT TYPE C, AS PER PLAN	LF.	
603	36" CONDUIT TYPE C, AS PER PLAN	LF.	
			<b>TOTALS</b>

REFERENCE DWGS.  
 FOR PAVEMENT CROSS-SECTIONS  
 FOR PAVEMENT, SIGNING & STRIPING PLANS  
 FOR STORM SEWER & OUTLET PROFILES  
 FOR STORM CROSS CONNECTION DETAILS  
 FOR RIGHT-OF-WAY PLANS  
 FOR DRIVEWAY PROFILES  
 FOR DRIVEWAY SUMMARY & CONSTRUCTION DETAILS

SH'T NO.  
 62-65  
 136, 137  
 150  
 165  
 203-204

BENCHMARK: R.R. SPIKE IN POLE # 398625  
 STA. 70+08.11, 0' L.  
 ELEV. 588.01

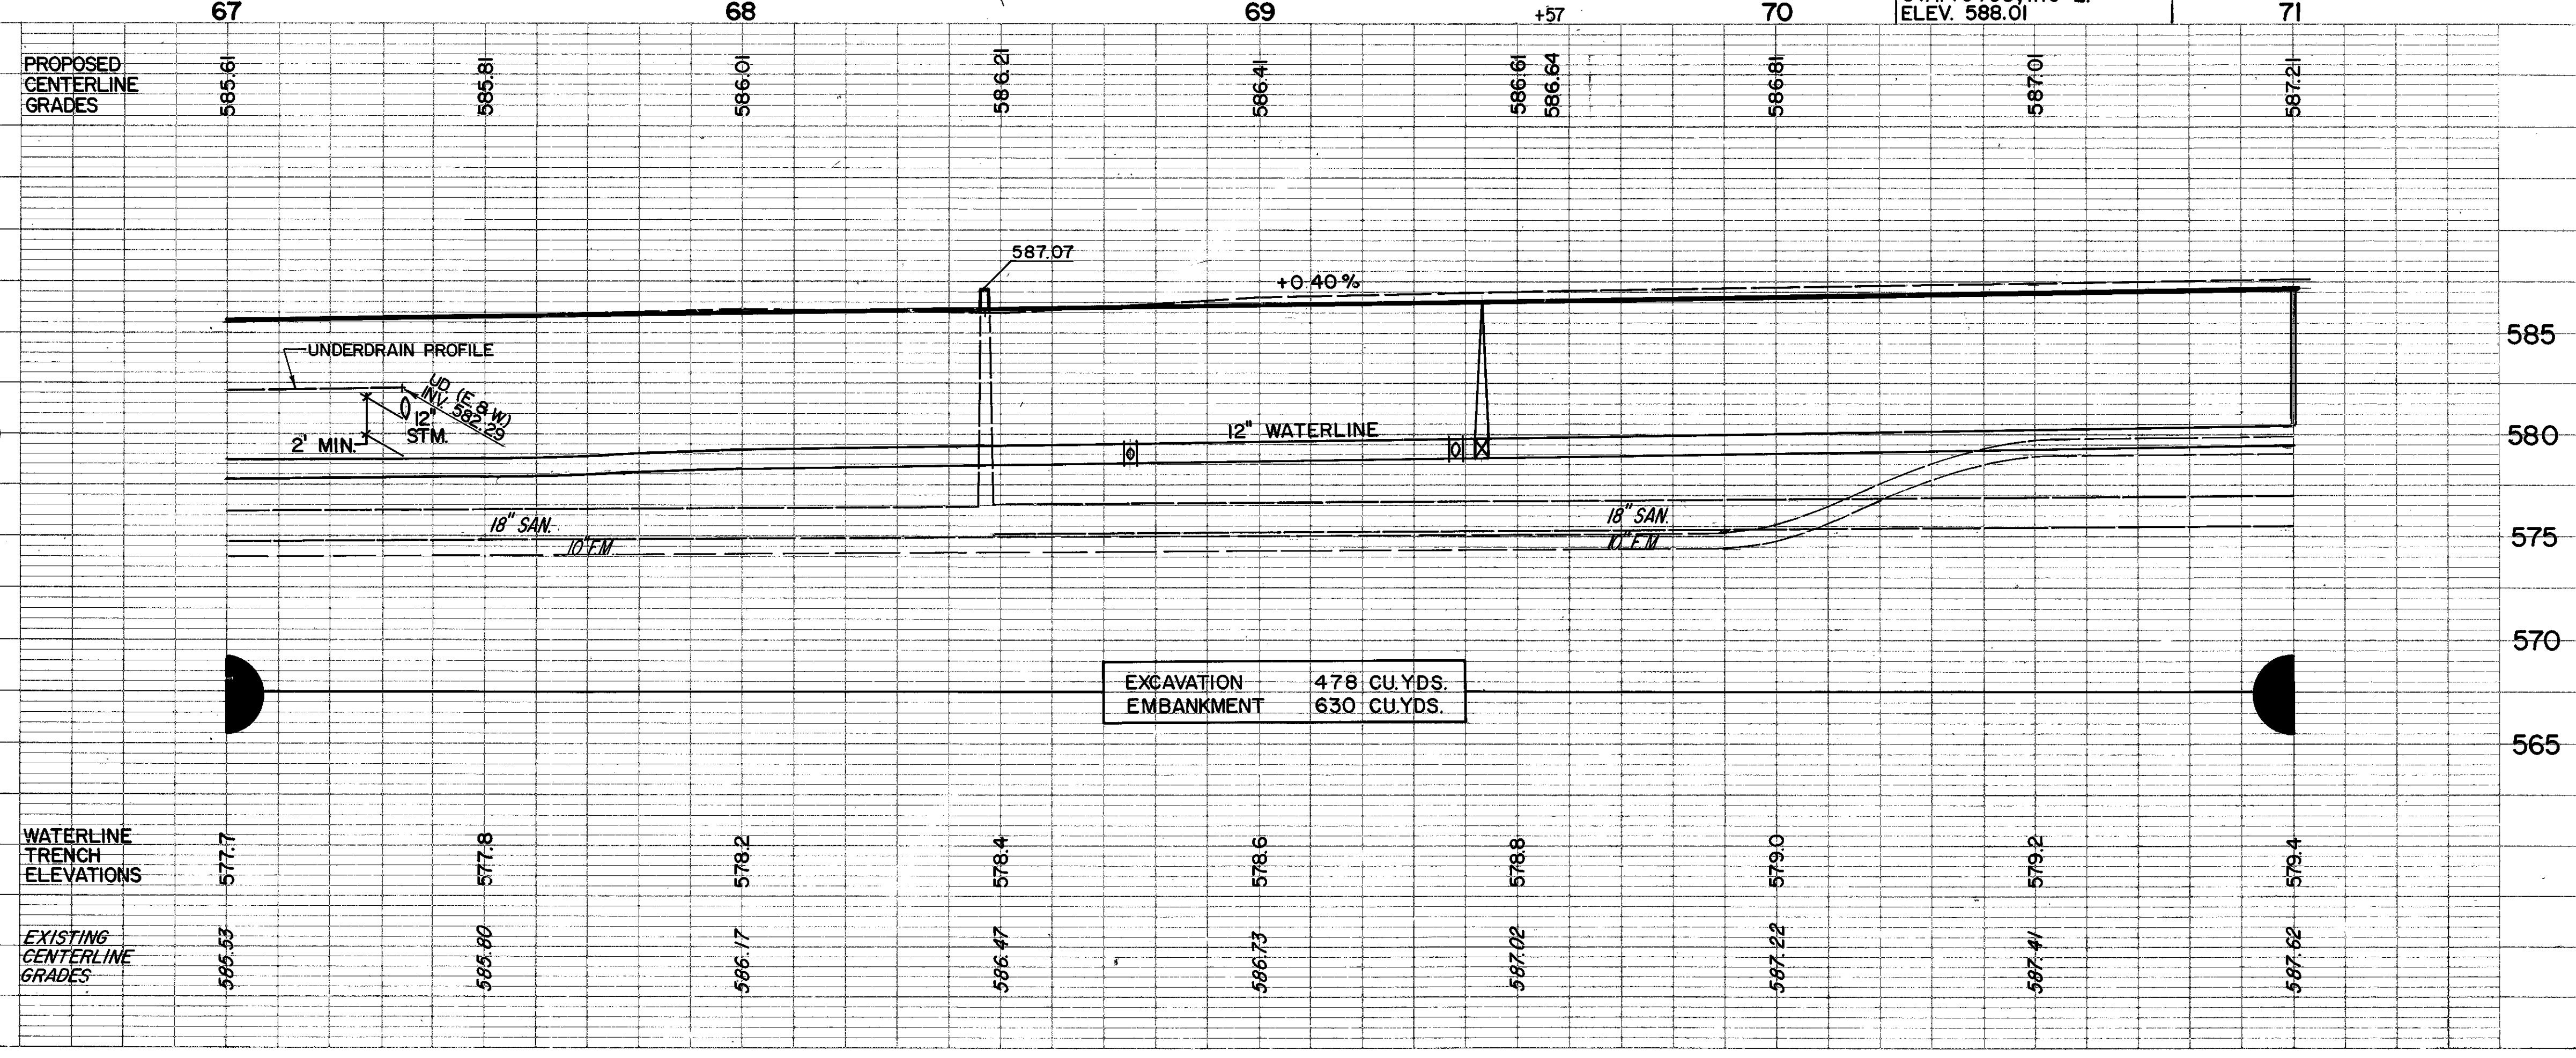

EXCAVATION 478 CU.YDS.  
 EMBANKMENT 630 CU.YDS.

**DRAINAGE**

REF	LOCATION	LF.
D-1	69+30.5, 35'R. - 71+00, 34'R.	169.5
D-2	67+00 - 67+35, 35'R.	
D-3	67+35, 14'L. - 35'L.	21.5
D-4	68+75, 14'R. - 69+30.5, 35'R.	59
D-5	70+35, 14'R. - 35'R.	21
D-6	67+35, 14'L. - 14'R.	28.5
D-7	67+35, 35'L.	
D-8	69+30.5, 35'R.	
D-9	70+35, 14'R.	
D-10	67+35, 14'L. & 14'R.	
D-11	68+75, 14'L.	
D-12	68+47, 27.5'R. (SANITARY)	
D-13	67+00 - 67+35, L. & R.	40
D-14	67+35 - 71+00, L. & R.	
<b>TOTALS</b>		<b>169.5</b>

**ROADWAY**

REF	LOCATION	LUMP
R-1	70+00, 26'L.	1
<b>TOTALS</b>		<b>Lump</b>

**WATERWORKS**

REF	LOCATION	LF.	EA.	EA.	EA.	EA.
W-1	67+00 - 71+00	400				
W-2	69+38, 30.5'L. - 25'R.		55.5			
W-3	69+43, 30.5'L.			1		
W-4	69+38, 25'L.				1	
W-5	68+75, 30.5'L.					1
W-6	71+00, 30.5'L.					1
<b>TOTALS</b>		<b>400</b>	<b>55.5</b>	<b>1</b>	<b>1</b>	<b>1</b>

PLAN  
 NOTE BOOK ALIGNED CHECKED  
 NO.

PROFILE  
 NOTE BOOK GRADES CHECKED  
 NO.