
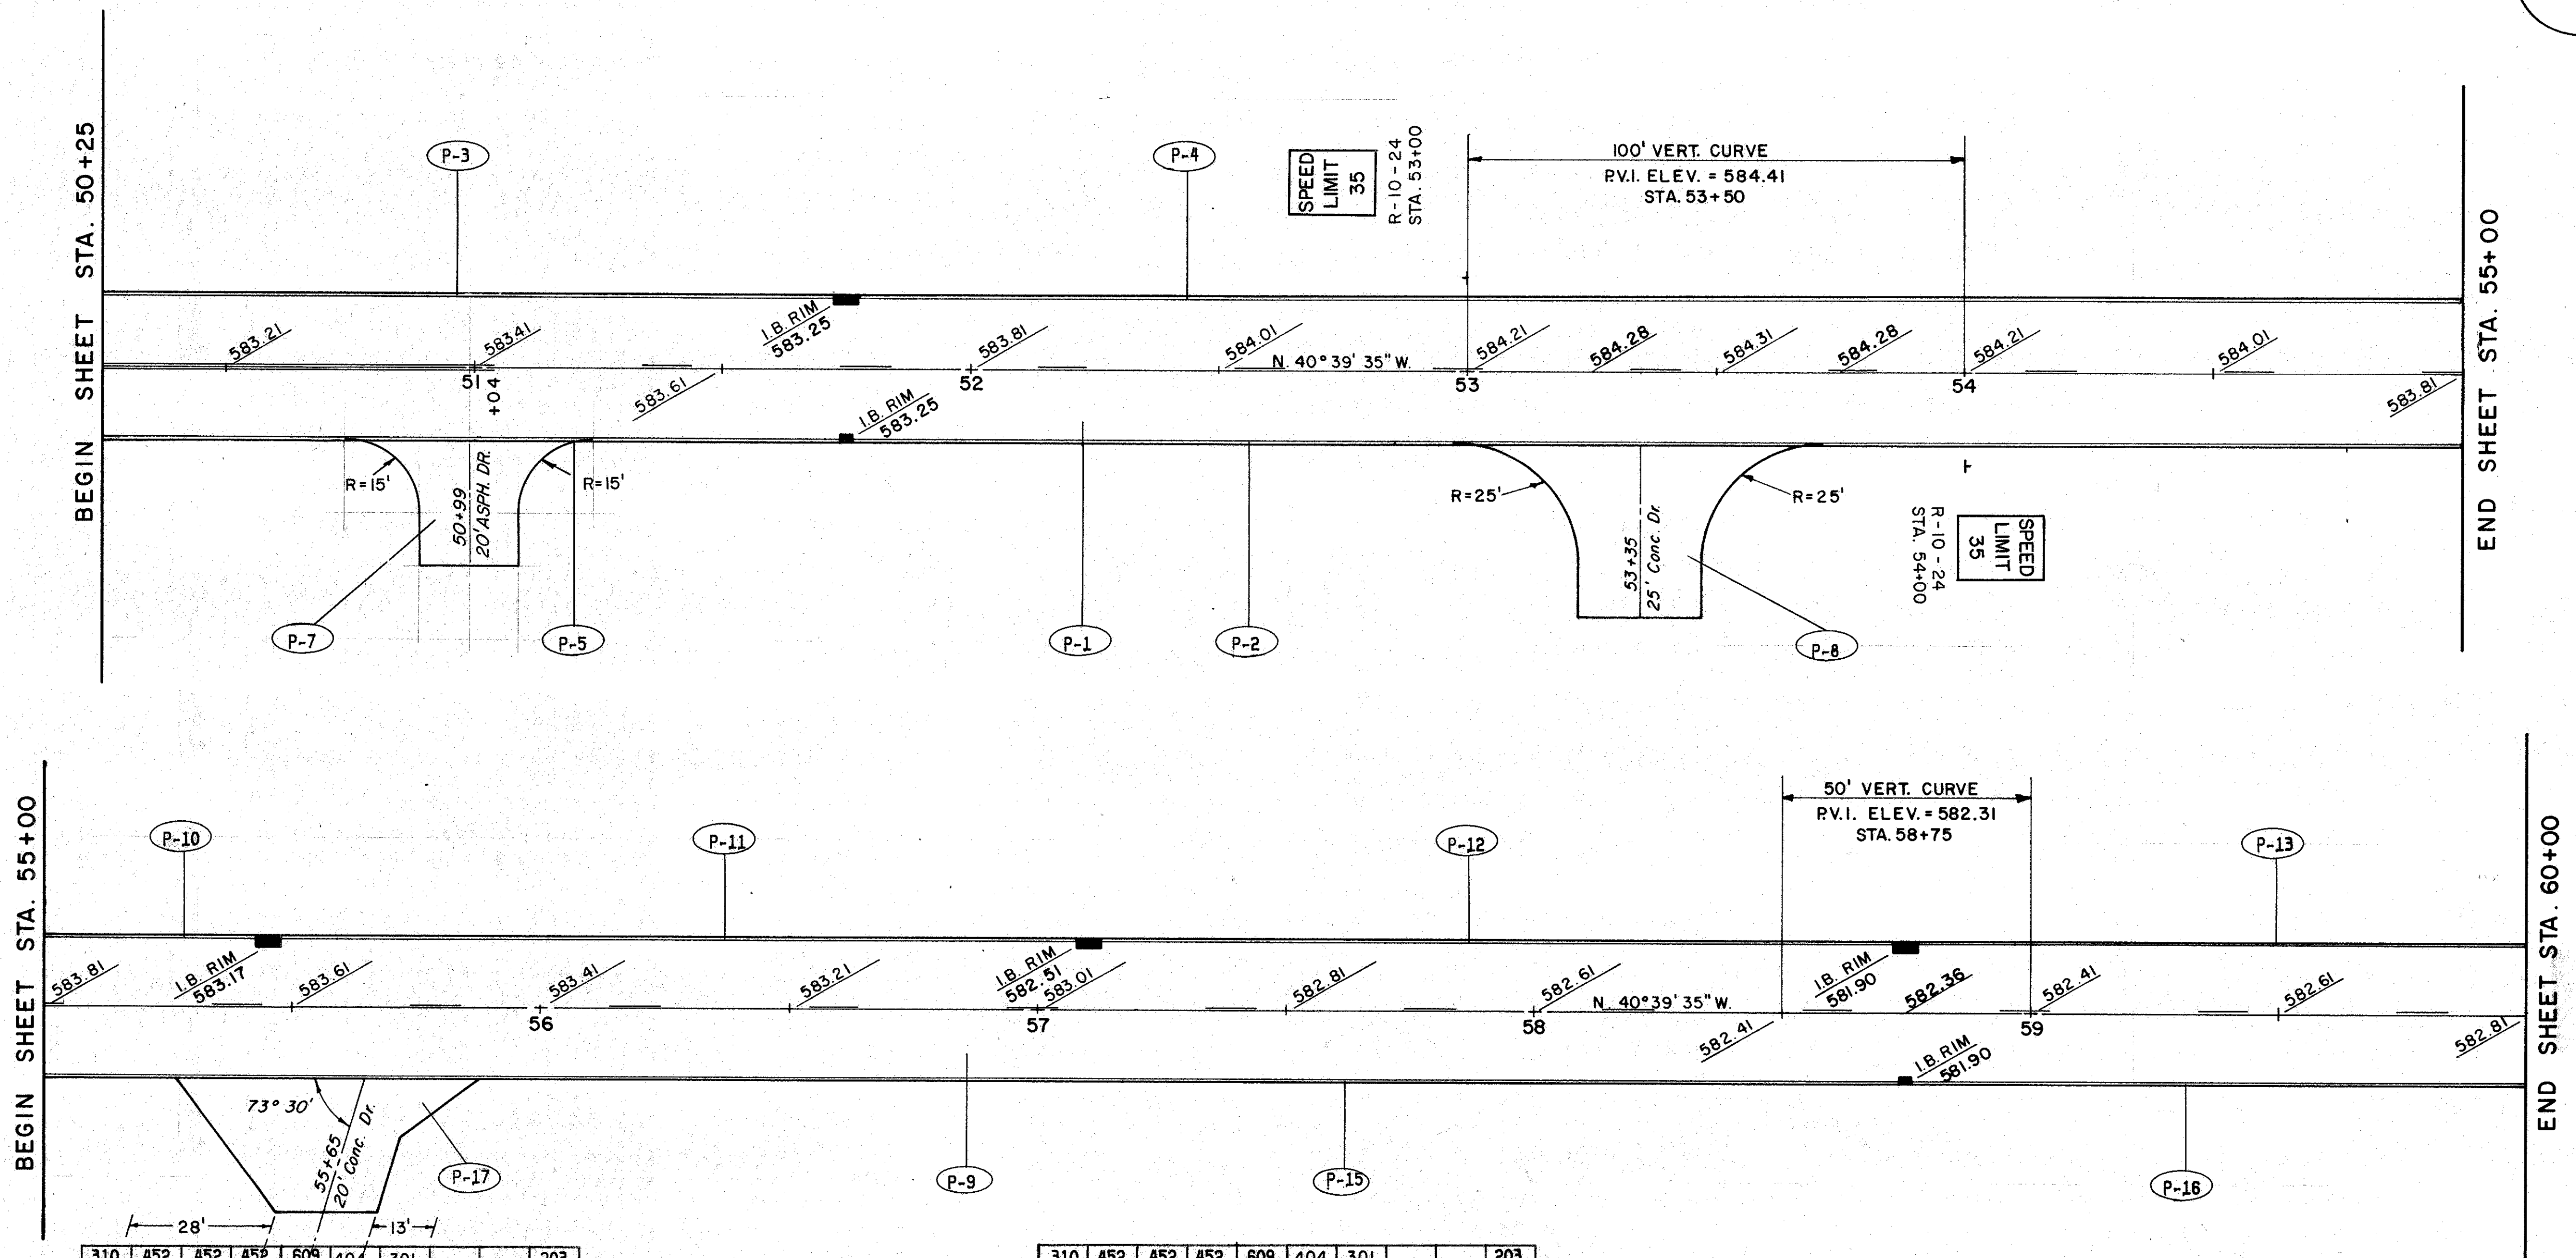


CALC. BY B.S.C.
DATE 1/13/84
CHKD. BY K.S.
DATE 3/9/84

LAK-535-0.42
HIGH STREET / WATER STREET

OHIO
FHWA REGION 5

135
225



PAVEMENT										
REF	LOCATION	6" SUBBASE TYPE 2	6" PLAIN PORTLAND CEMENT CONCRETE	7" PLAIN PORTLAND CEMENT CONCRETE	8" PLAIN PORTLAND CEMENT CONCRETE	CURB STANDARD TYPE 2-A	1" ASPHALTIC CONCRETE	5" BITUMINOUS AGGREGATE		DRIVEWAY EXCAVATION
		CY.	SY.	SY.	SY.	LF.	CY.	CY.		CY.
P-1	50+25-55+00	255.1		15306						
P-2	51+76.5-55+00 R.					323.5				
P-3	50+25-51+71.9 L.					146.9				
P-4	51+78.1-55+00 L.					321.9				
P-5	50+76-51+73.5 R.					148.5				
P-7	DRIVE 50+51 R.		37.3				0.6	3		10.0
P-8	DRIVE 53+35 (COMMON) R.			124.4						22.7
P-9	55+00-60+00	268.5		16111						
P-10	55+00-55+41.9 L.					41.9				
P-11	55+48.1-57+06.9 L.					158.8				
P-12	57+13.1-58+71.9 L.					158.8				
P-13	58+78.1-60+00 L.					121.9				
TOTALS										

PAVEMENT										
REF	LOCATION	6" SUBBASE TYPE 2	6" PLAIN PORTLAND CEMENT CONCRETE	7" PLAIN PORTLAND CEMENT CONCRETE	8" PLAIN PORTLAND CEMENT CONCRETE	CURB STANDARD TYPE 2-A	1" ASPHALTIC CONCRETE	5" BITUMINOUS AGGREGATE		DRIVEWAY EXCAVATION
		CY.	SY.	SY.	SY.	LF.	CY.	CY.		CY.
P-15	55+00-58+73.5 R.					373.8				
P-16	58+76.5-60+00 R.					123.5				
P-17	DRIVE 55+65 (COMMON) R.				110.4					26.6
TOTALS		524	38	3142	235	1920	1	3		60

TRAFFIC CONTROL					
REF	LOCATIONS	4" DOUBLE YELLOW SOLID CENTERLINE	4" SINGLE YELLOW DASHED CENTERLINE	SIGN FLAT SHEET	GROUND MOUNTED SUPPORTS No. 3 POSTS
C/L		MI.	MI.	SF	LF.
C/L	50+25-51+04	0.01			
C/L	51+04-60+00		0.17		
RT/LT	54+00 & 53+00 (R-10-24)			10	26
TOTALS		0.01	0.17	10	26