



PLAN NO. 271


DRIVEWAY DETAILS

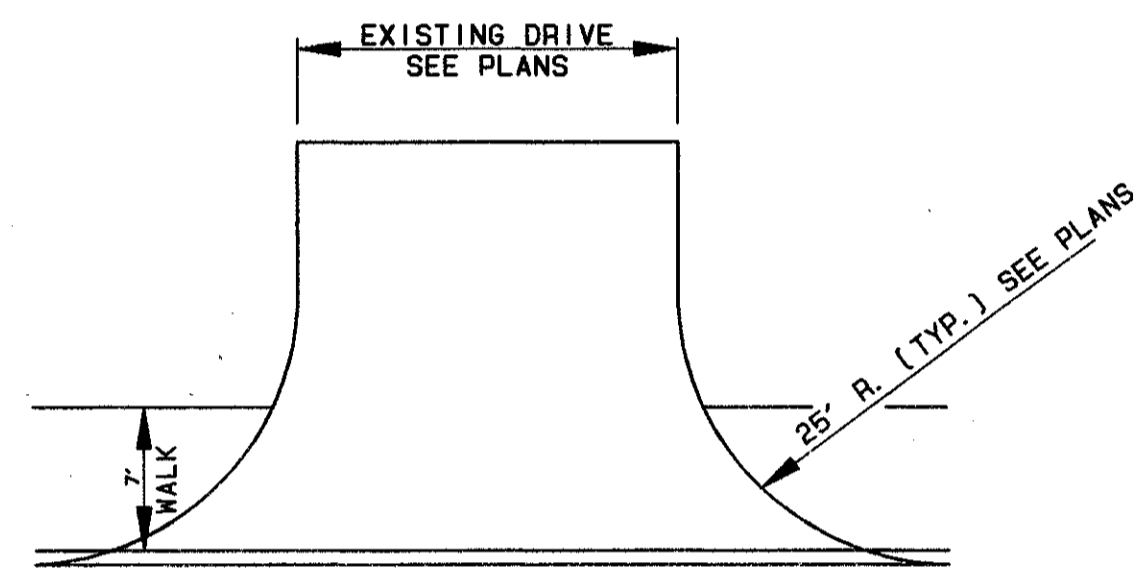

TYPICAL DRIVE DETAIL

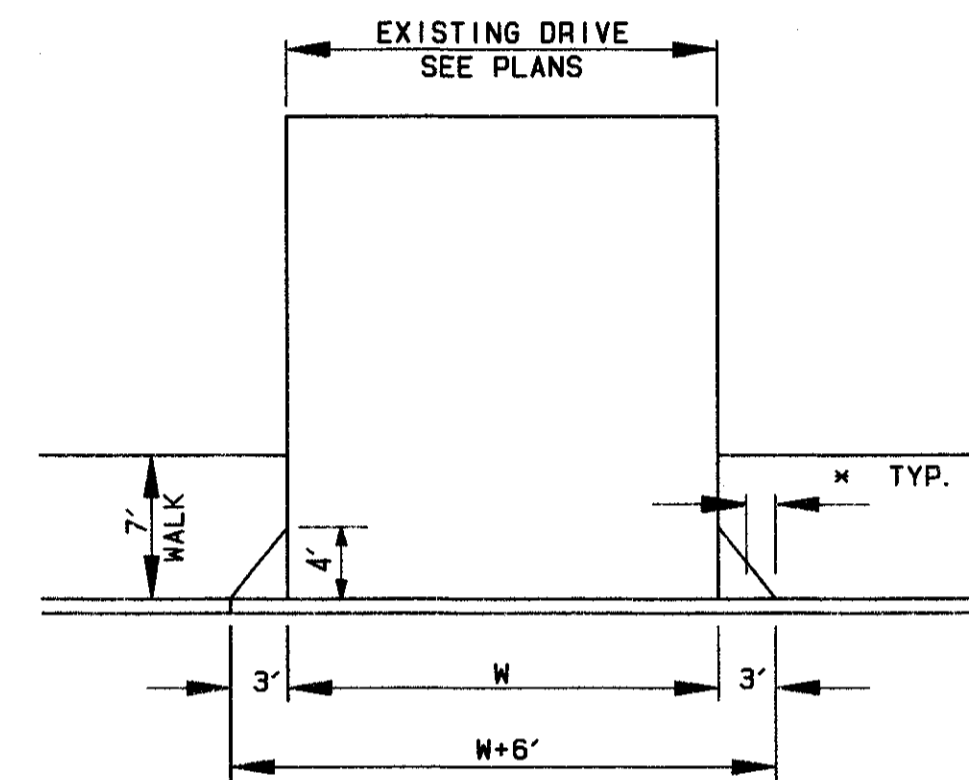

TYPICAL DRIVE DETAIL

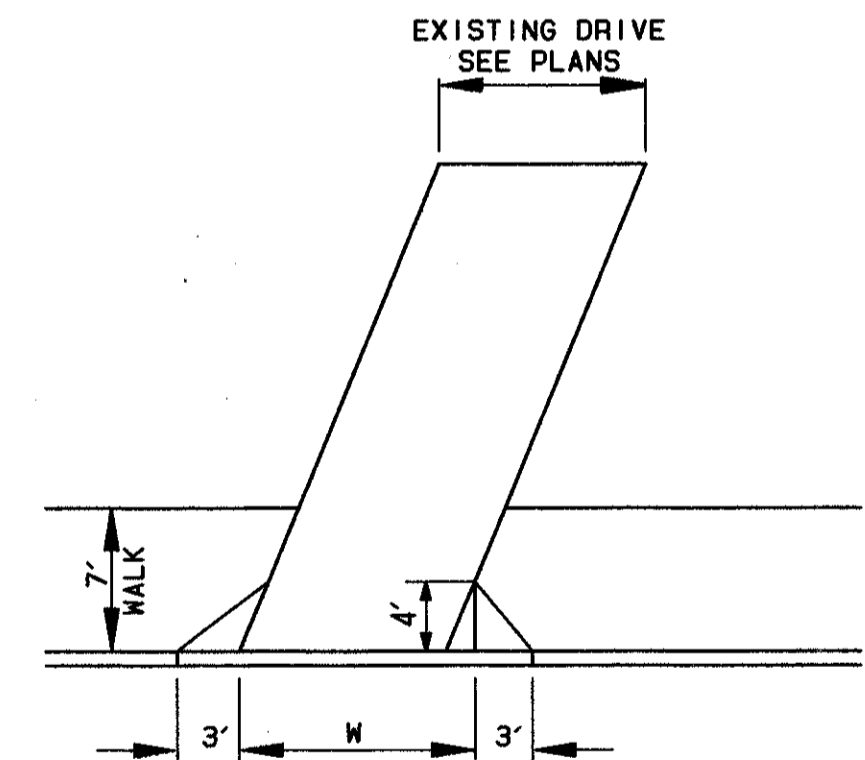


TYPICAL DRIVE DETAIL


WHERE DRIVE ABUTS NEW OR EXISTING CONCRETE SIDEWALKS AND NEW OR EXISTING CONCRETE CURBS, 1/2" EXPANSION JOINT MATERIAL 705.03 SHALL BE PROVIDED.

CONCRETE DRIVES AND APRONS TO HAVE IMPRESSED JOINT ALONG CL OF DRIVE. ADDITIONAL IMPRESSED JOINTS SHALL BE SPACED AT 8 FT. CENTERS OR AS DIRECTED BY THE ENGINEER.


THE EXPANSION JOINT BETWEEN THE BACK OF CURB AND DRIVE APRON SHALL BE SEALED WITH 705.01, 705.02 OR 705.11 JOINT SEALER.

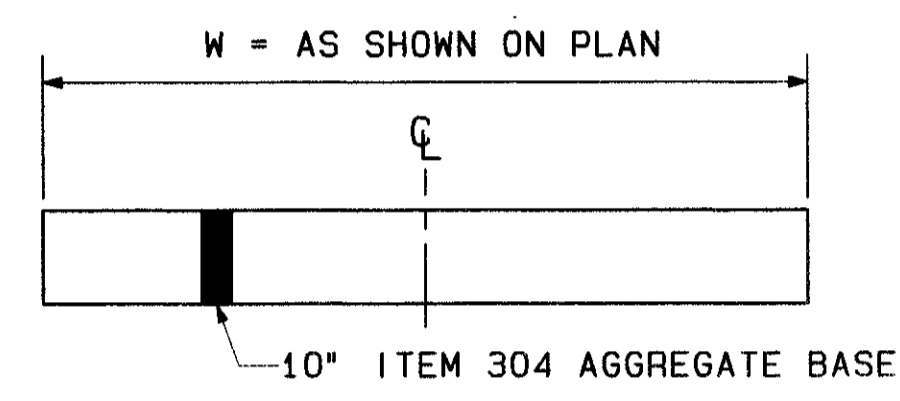


COMMERCIAL STONE DRIVE

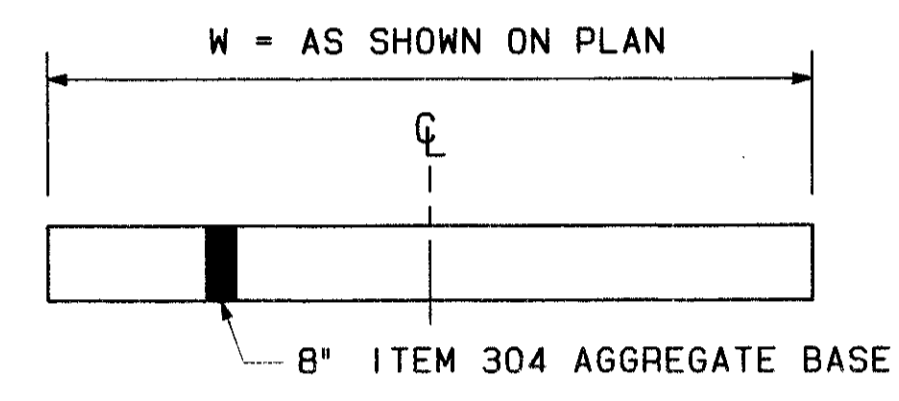


RESIDENTIAL STONE DRIVE

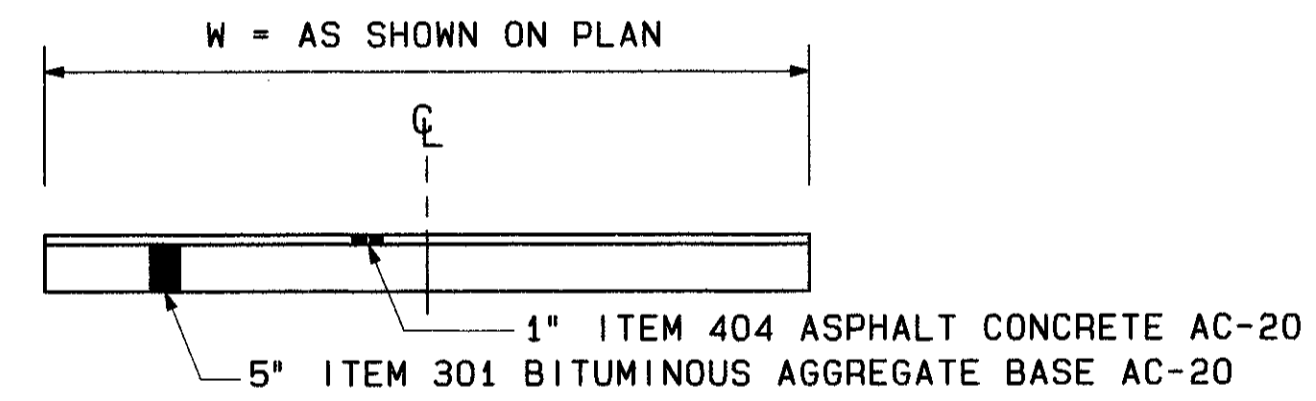


COMMERCIAL ASPHALT DRIVE

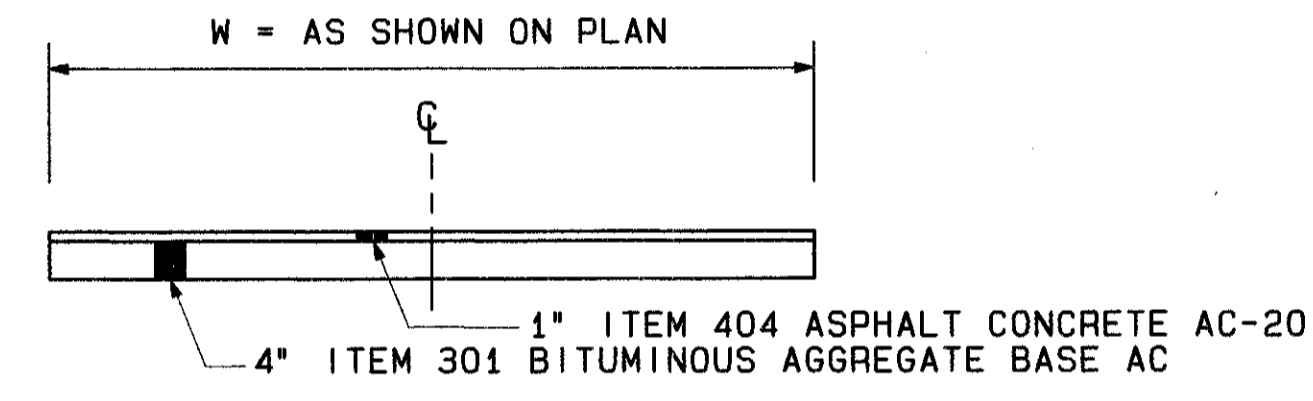

RESIDENTIAL ASPHALT DRIVE

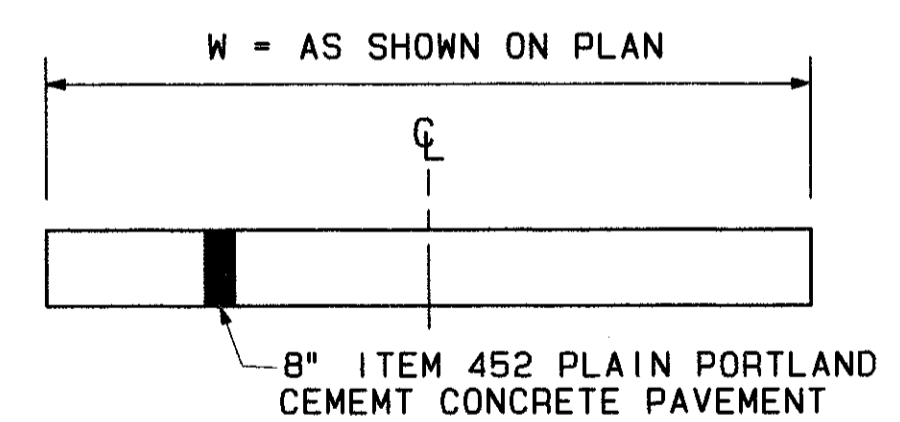

COMMERCIAL CONCRETE DRIVE

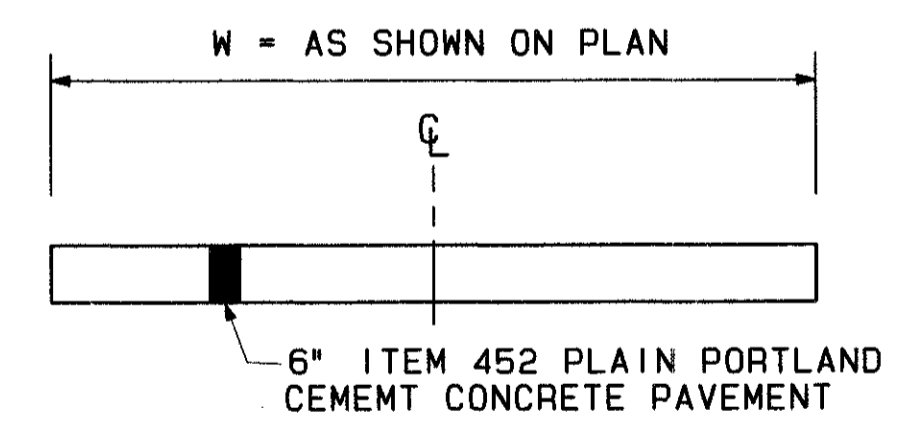

RESIDENTIAL CONCRETE DRIVE

TYPICAL DRIVEWAY SECTIONS

FOR DRIVE DIMENSIONS SEE DRIVEWAY SUB-SUMMARY SHEET 78

90463 MON 10/12/92 11:06 AM DOROTHY FILES: DRDET1.PLT