


TYPICAL SECTIONS

TYPE 404 ON 305


FHWA REGION	STATE	PROJECT
5	OHIO	

LAKE COUNTY
LAK-84-27.17

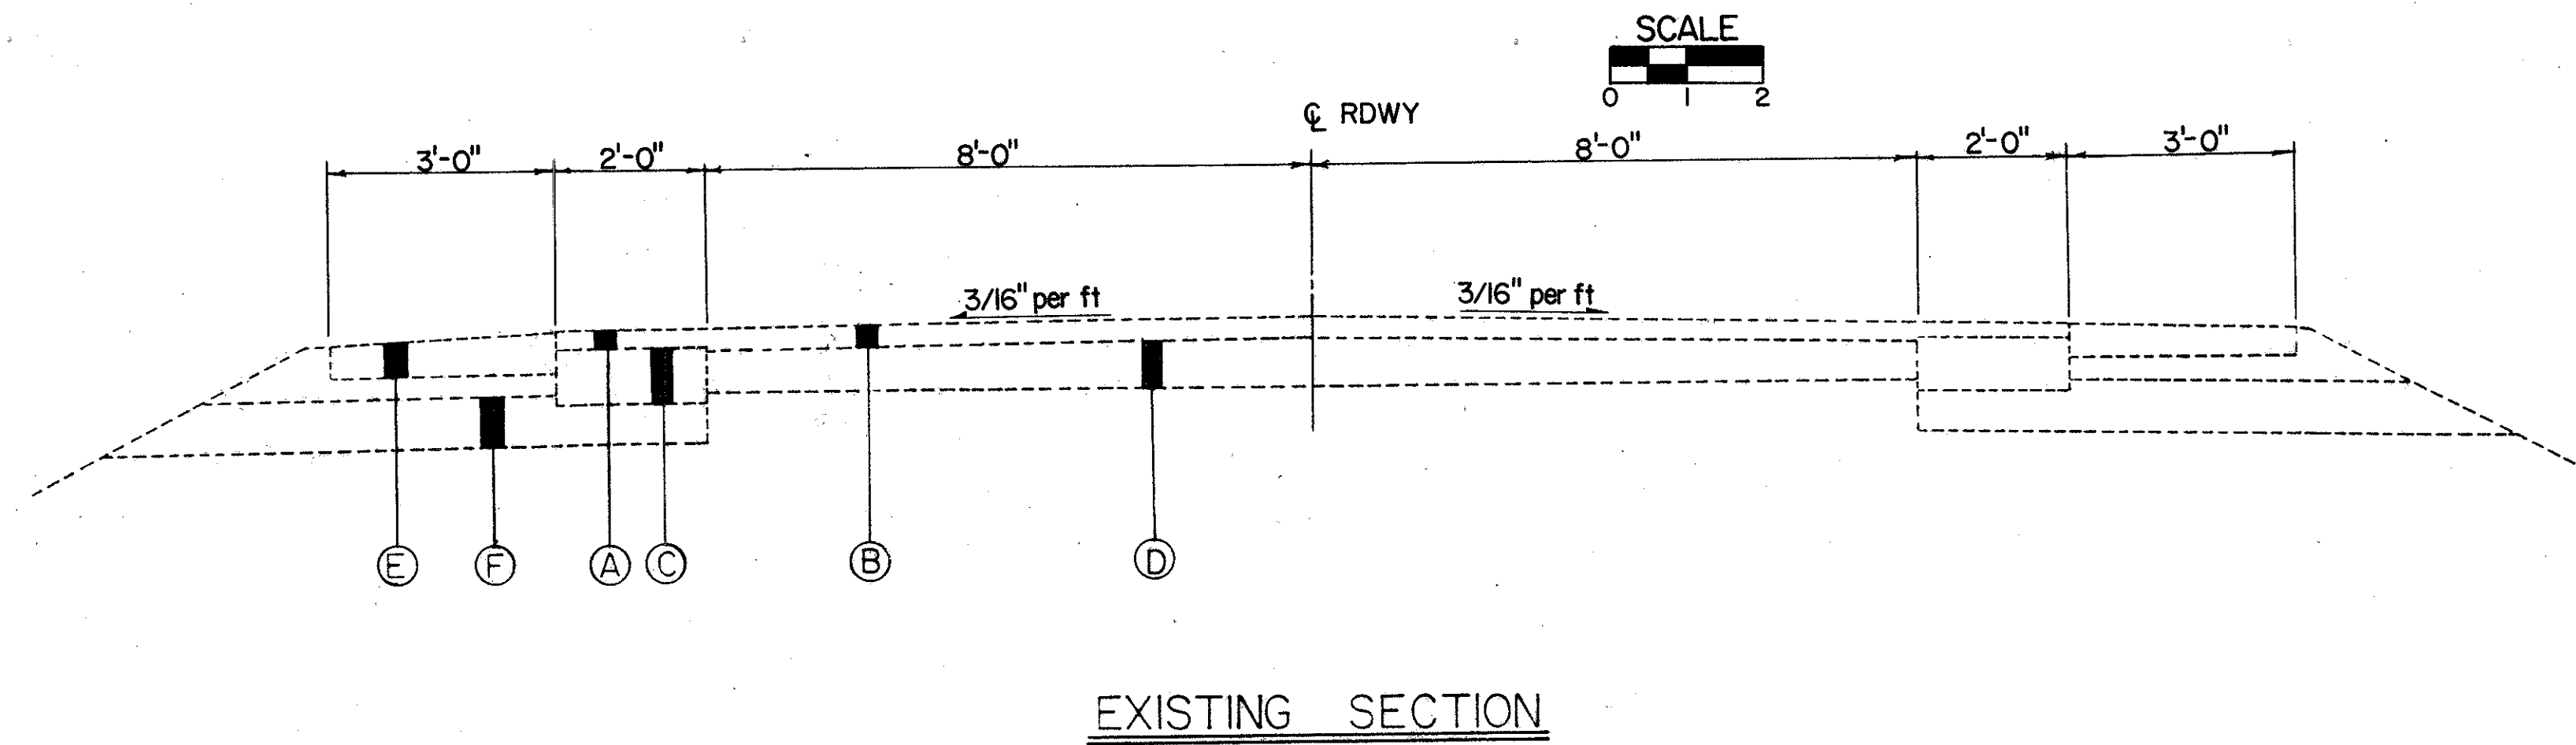

EXISTING PAVEMENT

- Ⓐ 2-1/2" +/- ASPHALT CONCRETE WEARING SURFACE
- Ⓑ 3" +/- ASPHALT CONCRETE WEARING SURFACE
- Ⓒ 8-1/4" +/- ASPHALT CONCRETE BASE COURSE
- Ⓓ 6" * PORTLAND CEMENT CONCRETE BASE
- Ⓔ VARIES ASPHALT CONCRETE SHOULDER
- Ⓕ 10" X 8" STONE UNDERDRAIN
- * 6" DEPTH AT PAVEMENT EDGES, 7-1/2" DEPTH AT PAVEMENT C.L.

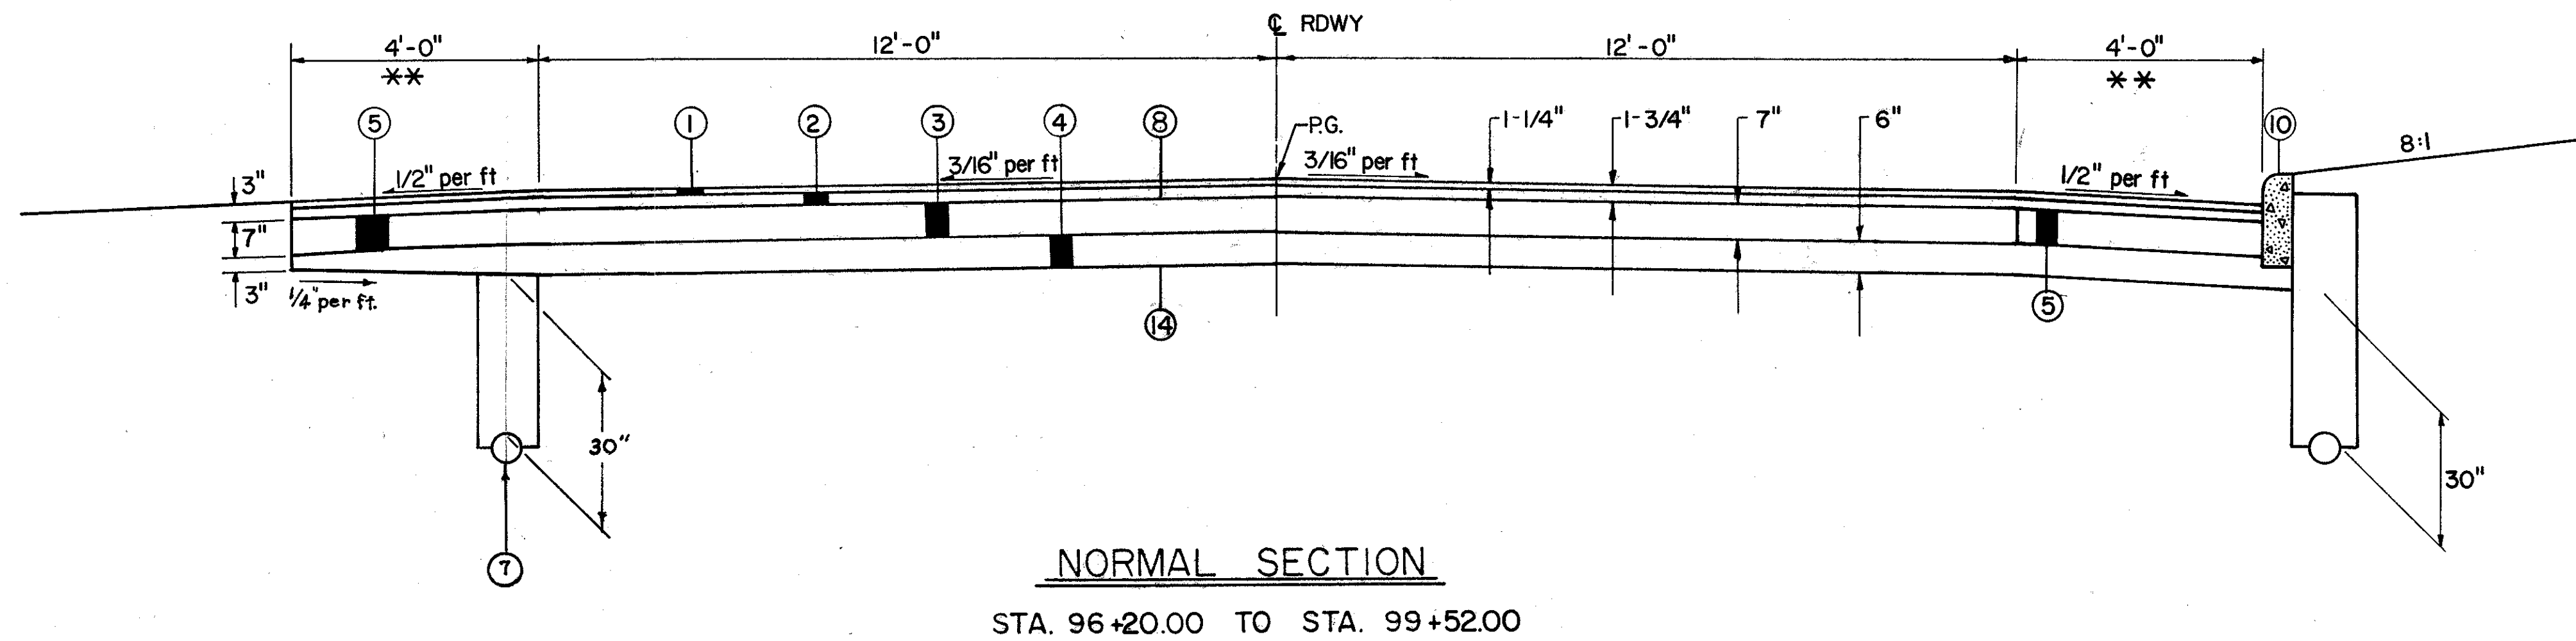

PROPOSED PAVEMENT

- ① 404 ASPHALT CONCRETE, AC-20
- ② 403 ASPHALT CONCRETE, AC-20
- ③ 305 7" CONCRETE BASE
- ④ 310 SUBBASE, TYPE II, AS PER PLAN
- ⑤ 304 AGGREGATE BASE, AS PER PLAN
- ⑦ 605 6" SHALLOW PIPE UNDERDRAIN, AS PER PLAN
- ⑧ 407 TACK COAT, AS PER PLAN
- ⑨ 609 ASPHALT CONCRETE CURB, AC-20; STANDARD TYPE I.
- ⑩ 609 CURB, STANDARD TYPE 6
- ⑪ SPECIAL PAVEMENT PLANING BITUMINOUS, WITHOUT HEATING
- ⑫ 301 BITUMINOUS AGGREGATE BASE, AC-20
- ⑬ 606 GUARDRAIL, STANDARD TYPE 5
- ⑭ 203 SUBGRADE COMPACTION
- ⑥ NOT USED

** DOES NOT MEET STANDARD GRADED SHOULDER WIDTH (8 FEET)

