



# TYPICAL SECTIONS

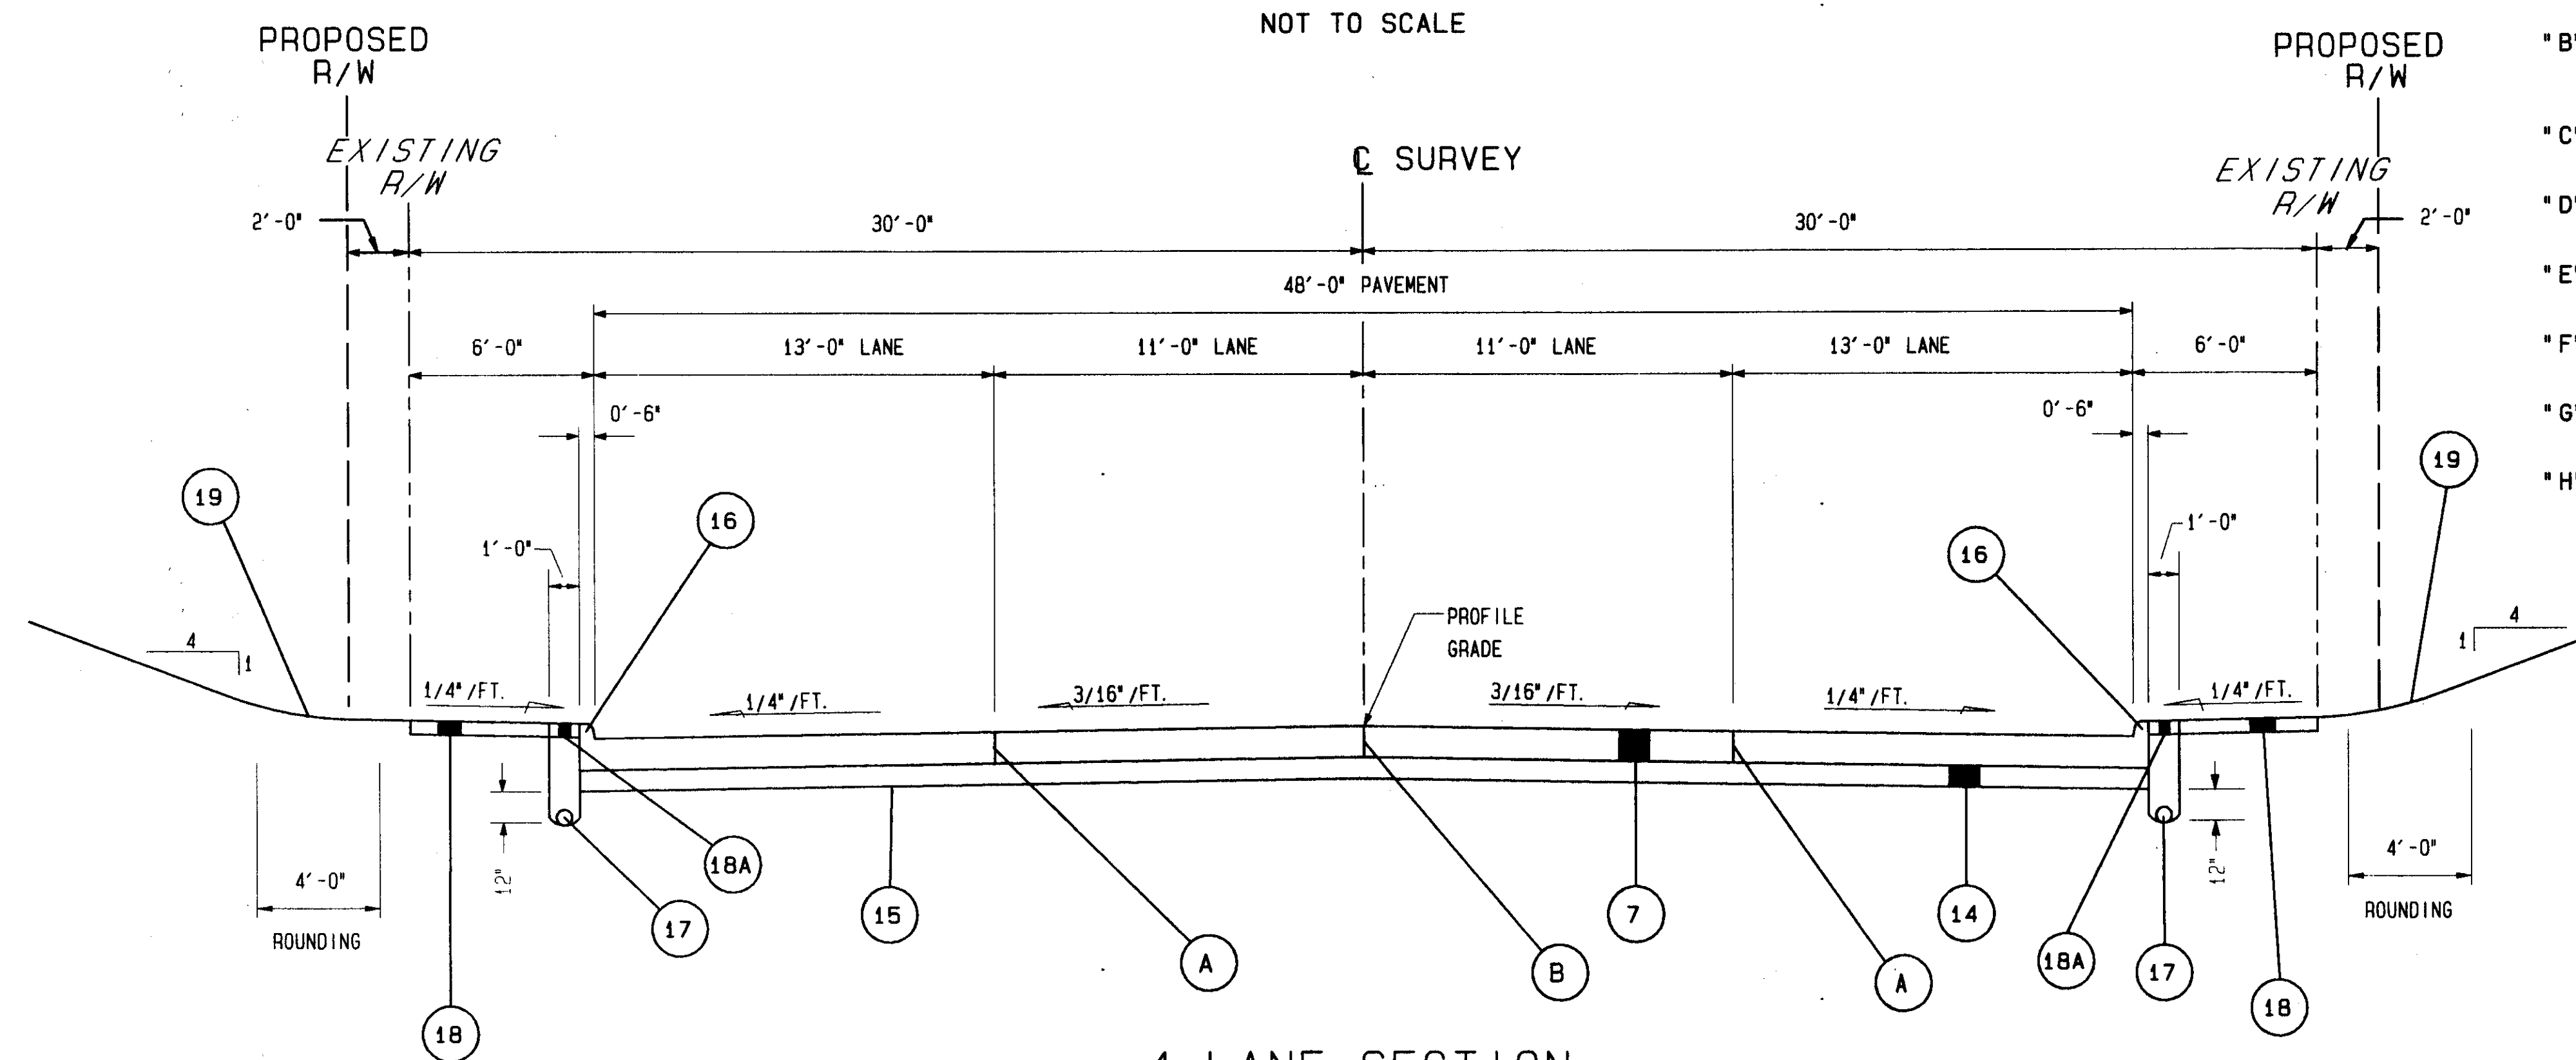

4 LANE SECTION

STA. 14+60.50 TO STA. 32+07.00 = 1747.00 LIN. FT.

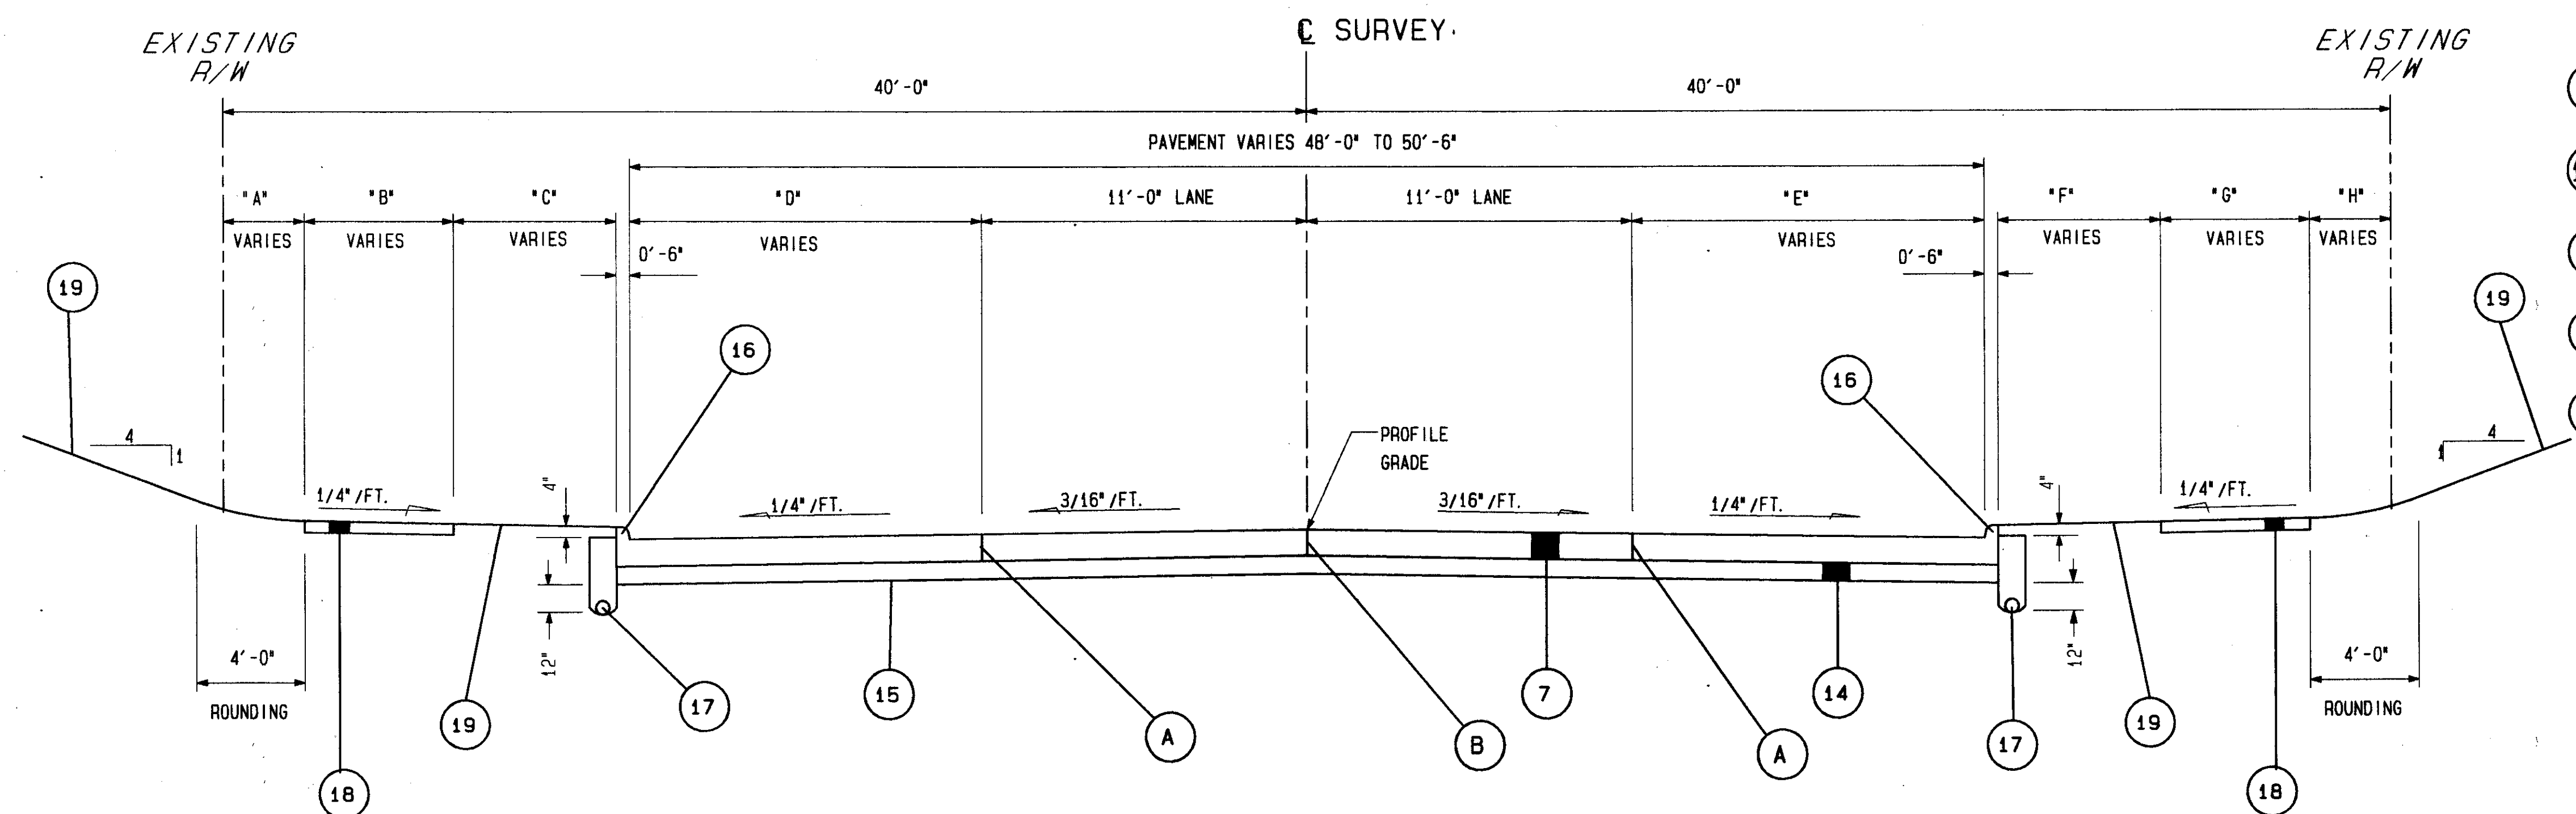

4 LANE TRANSITION SECTION

STA. 32+07.00 TO STA. 33+79.00 = 172.00 LIN. FT.

- "A" IS 10' FROM STA. 32+07 TO STA. 32+53.92 VARIES FROM 10' AT STA. 32+53.92 TO 3.8' AT 33+79.
- "B" IS 5.5' FROM STA. 32+07 TO STA. 32+53.92 VARIES FROM 5.5' AT STA. 32+53.92 TO 8.5' AT STA. 33+27.10 "B" IS 5' FROM STA. 33+27.10 TO STA. 33+79.
- "C" IS 0' FROM STA. 32+07 TO STA. 33+27.10 "C" VARIES FROM 4.1' AT STA. 33+27.10 TO 5.2' AT STA. 33+79.
- "D" IS 13' FROM STA. 32+07 TO STA. 33+30 "D" VARIES FROM 13' AT STA. 33+30 TO 14.5' AT STA. 33+79.
- "E" IS 13' FROM STA. 32+07 TO STA. 33+30 VARIES FROM 13' AT STA. 33+30 TO 14.0' AT STA. 33+79.
- "F" IS 0' FROM STA. 32+07 TO STA. 32+38.75 VARIES FROM 2.5' AT STA. 33+38.75 TO 7.2' AT STA. 33+79.
- "G" IS 7.5' FROM STA. 32+07 TO STA. 32+38.75 "G" IS 5' FROM STA. 33+38.75 TO STA. 33+79.
- "H" IS 8' FROM STA. 32+07 TO STA. 32+38.75 VARIES FROM 8' AT STA. 33+38.75 TO 3.3' AT STA. 33+79.

## LEGEND

- 7 ITEM 451 - 9" REINFORCED CONCRETE PAVEMENT
- 14 ITEM 304 - 6" AGGREGATE BASE, AS PER PLAN
- 15 ITEM 203 - SUBGRADE COMPACTION
- 16 ITEM 830 - CURB, TYPE 2-A
- 17 ITEM 605 - 6" SHALLOW PIPE UNDERDRAIN WITH FABRIC WRAP, AS PER PLAN
- 18 ITEM 608 - 4" CONCRETE WALK
- 18A ITEM 608 - 4" CONCRETE WALK, AS PER PLAN, BOMANITE
- 19 ITEM 660 - SODDING UNSTAKED
- A LONGITUDINAL PAVEMENT JOINT
- B LONGITUDINAL PAVEMENT JOINT WITHOUT TIE BARS

FOR PAVEMENT QUANTITIES SEE SHEET 35  
 FOR SIDEWALK QUANTITIES SEE SHEET 38  
 FOR CURB QUANTITIES SEE SHEET 37  
 FOR SODDING QUANTITIES SEE SHEET 51

90272 MON 12/26/98 02:27 AM PAM FILES: TYP5.PLT