

Note: Cross Sections shall govern on this project over the Typical Sections where variable conditions are encountered


TYPICAL SECTION TYPE T-35

SCALE 3/8"=1'-0"

FED. RD. DIVISION	STATE	PROJECT	FISCAL YEAR
2	OHIO		


2
83

LAK 84 (3.27-7.81)
LAKE COUNTY

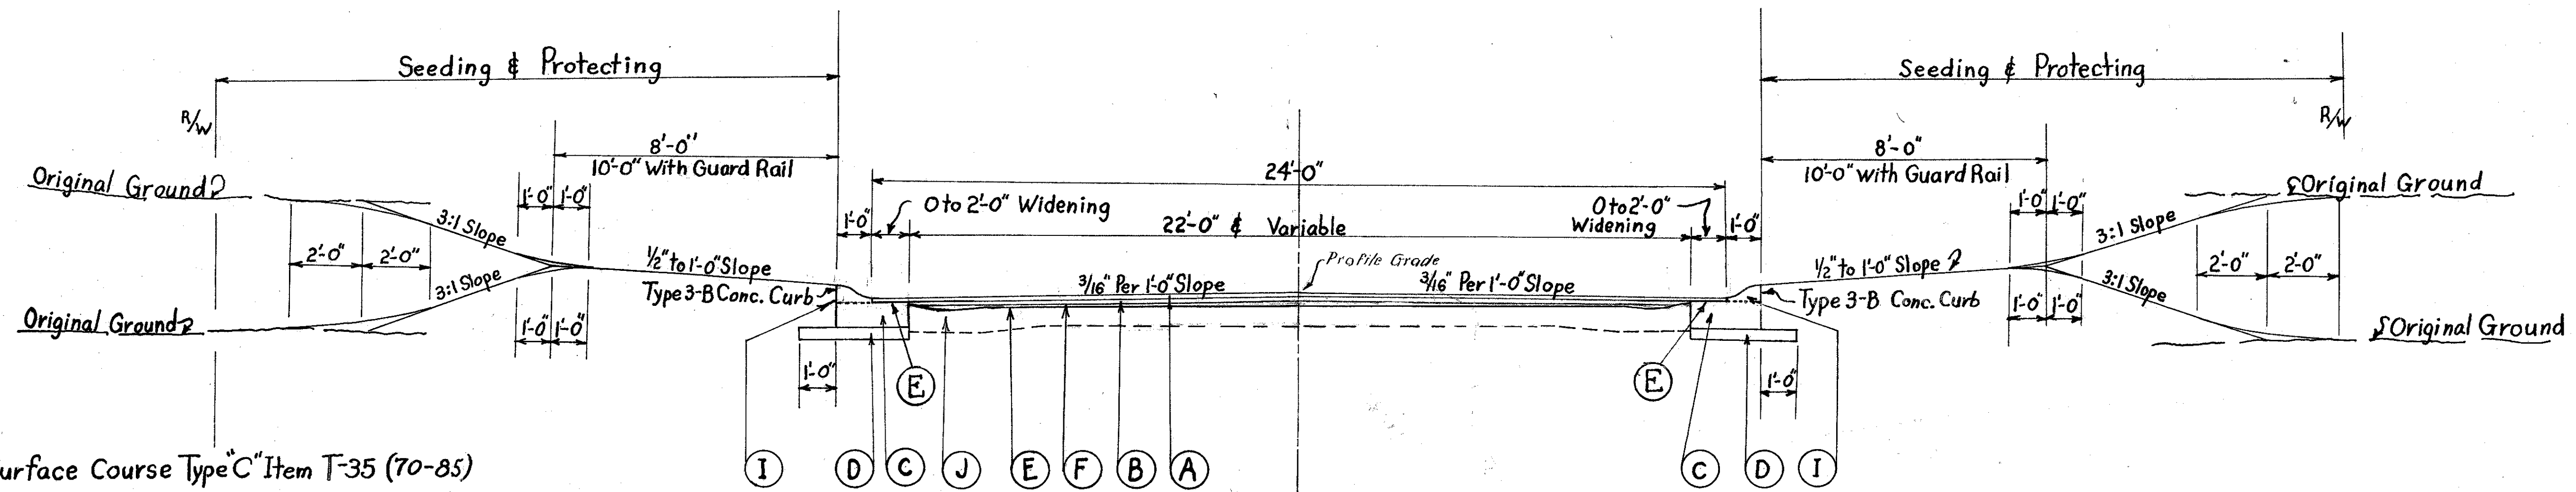


- (A) 1 1/2" Asphaltic Conc. Surface Course Type "C" Item T-35 (70-85)
- (B) 1 1/2" Asphaltic Conc. Leveling Course Item B-35 (70-85)
- (C) 8" Portland Cement Concrete Base Course Item B-70
- (D) 4" Subbase Grade C&D Item I-22
- (E) Bituminous Tack Coat (0.10 gallon per sq. yd.) Sec. M-5.5 MS-2 or RS-1 or Sec. M-5.2 RC-1 or RC-2 as per Sec. T-30.02
- (F) Asphaltic Concrete Preleveling Course Item B-35 (70-85), 0" Min.
- (G) Standard Type 6 Concrete Curb
- (H) Existing Concrete Base Course
- (I) Standard Type 3-B Concrete Curb (To be used as indicated on plan sheets)
- (J) Existing Concrete Pavement
- (K) Existing Brick Pavement
- (L) Existing Cushion Course
- (M) Existing Asphaltic Concrete Surface Course
- (N) Stabilized Crushed Aggregate Shoulder and Approaches Item I-18
- (O) 2 1/2" Asphaltic Concrete Base Course Item B-35 (70-85)
- (P) 8" Crushed Aggregate Base Course Item B-119
- (Q) 5" Sub Base Grade C, D, Item I-22
- (R) 1 1/2" Min. Thickness Asphaltic Concrete Leveling Course (70-85)
- (S) Bituminous Prime Coat (0.35 gal. per Sq. Yd.) Sec. M-5.7, RT-2 or RT-3; or Sec. M-5.2, RC-1 or RC-2.

Sta. 101+82.09 to Sta. 108+00
Sta. 119+00 to Sta. 170+00
Sta. 217+00 to Sta. 226+50
Sta. 178+00 to Sta. 185+00 } (WESTERLY SECTION)

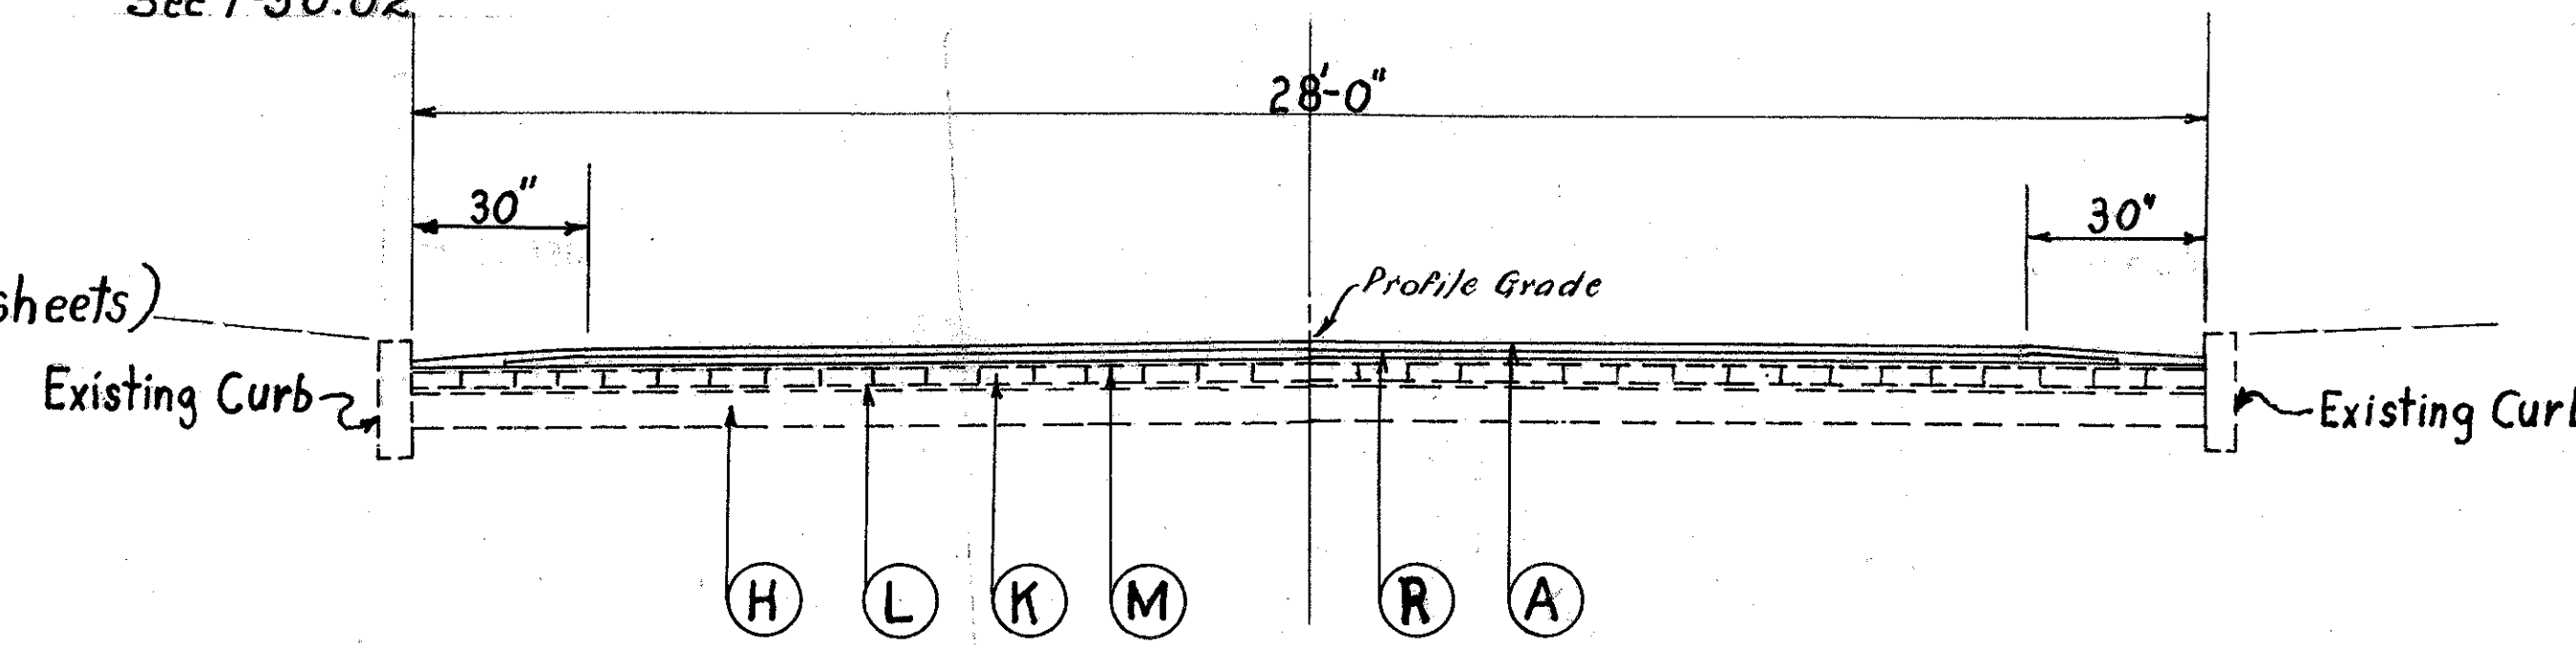

Sta. 226+50 to Sta. 238+13.77 (WESTERLY SECTION)
Equals
Sta. 0+00

- (A) 1 1/2" Asphaltic Conc. Surface Course Type "C" Item T-35 (70-85)
- (B) 1 1/2" Asphaltic Conc. Leveling Course Item B-35 (70-85)
- (C) 8" Portland Cement Concrete Base Course Item B-70
- (D) 4" Subbase Grade C&D Item I-22
- (E) Bituminous Tack Coat (0.10 gallon per sq. yd.) Sec. M-5.5 MS-2 or RS-1 or Sec. M-5.2 RC-1 or RC-2 as per Sec. T-30.02
- (F) Asphaltic Concrete Preleveling Course Item B-35 (70-85), 0" Min.
- (G) Standard Type 6 Concrete Curb
- (H) Existing Concrete Base Course
- (I) Standard Type 3-B Concrete Curb (To be used as indicated on plan sheets)
- (J) Existing Concrete Pavement
- (K) Existing Brick Pavement
- (L) Existing Cushion Course
- (M) Existing Asphaltic Concrete Surface Course
- (N) Stabilized Crushed Aggregate Shoulder and Approaches Item I-18
- (O) 2 1/2" Asphaltic Concrete Base Course Item B-35 (70-85)
- (P) 8" Crushed Aggregate Base Course Item B-119
- (Q) 5" Sub Base Grade C, D, Item I-22
- (R) 1 1/2" Min. Thickness Asphaltic Concrete Leveling Course (70-85)
- (S) Bituminous Prime Coat (0.35 gal. per Sq. Yd.) Sec. M-5.7, RT-2 or RT-3; or Sec. M-5.2, RC-1 or RC-2.

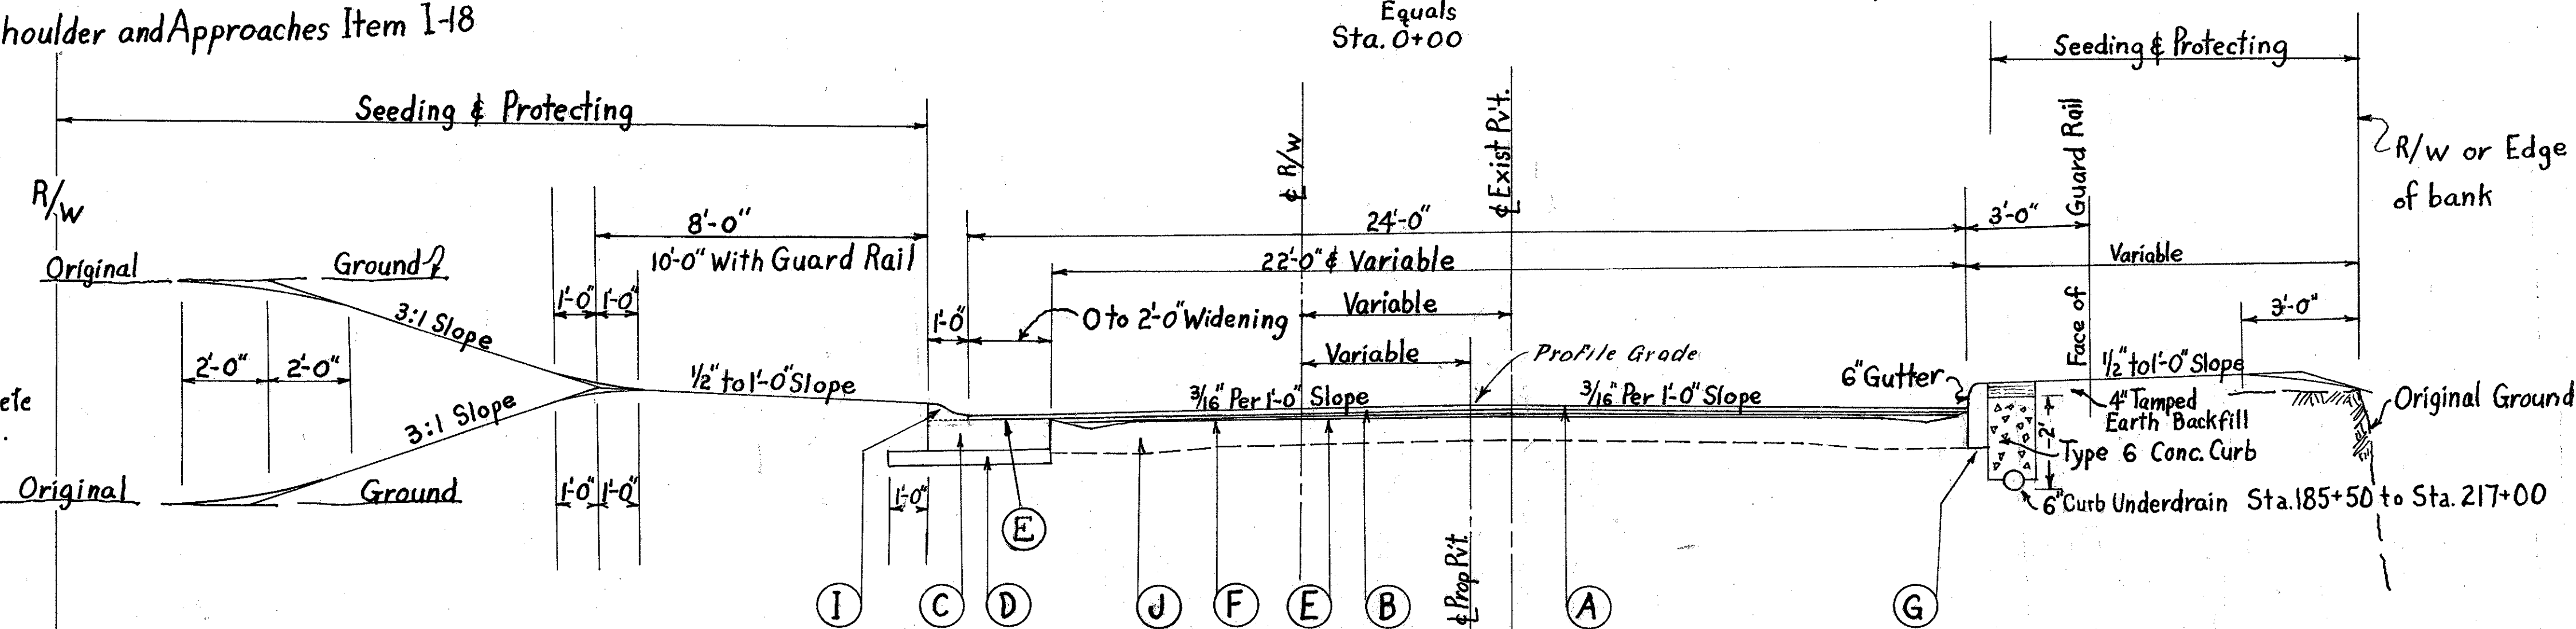

Sta. 186+00 to Sta. 216+00 (WESTERLY SECTION)