



09:33 AM RANDY FILES: PL2, PL1, PR2, PL1

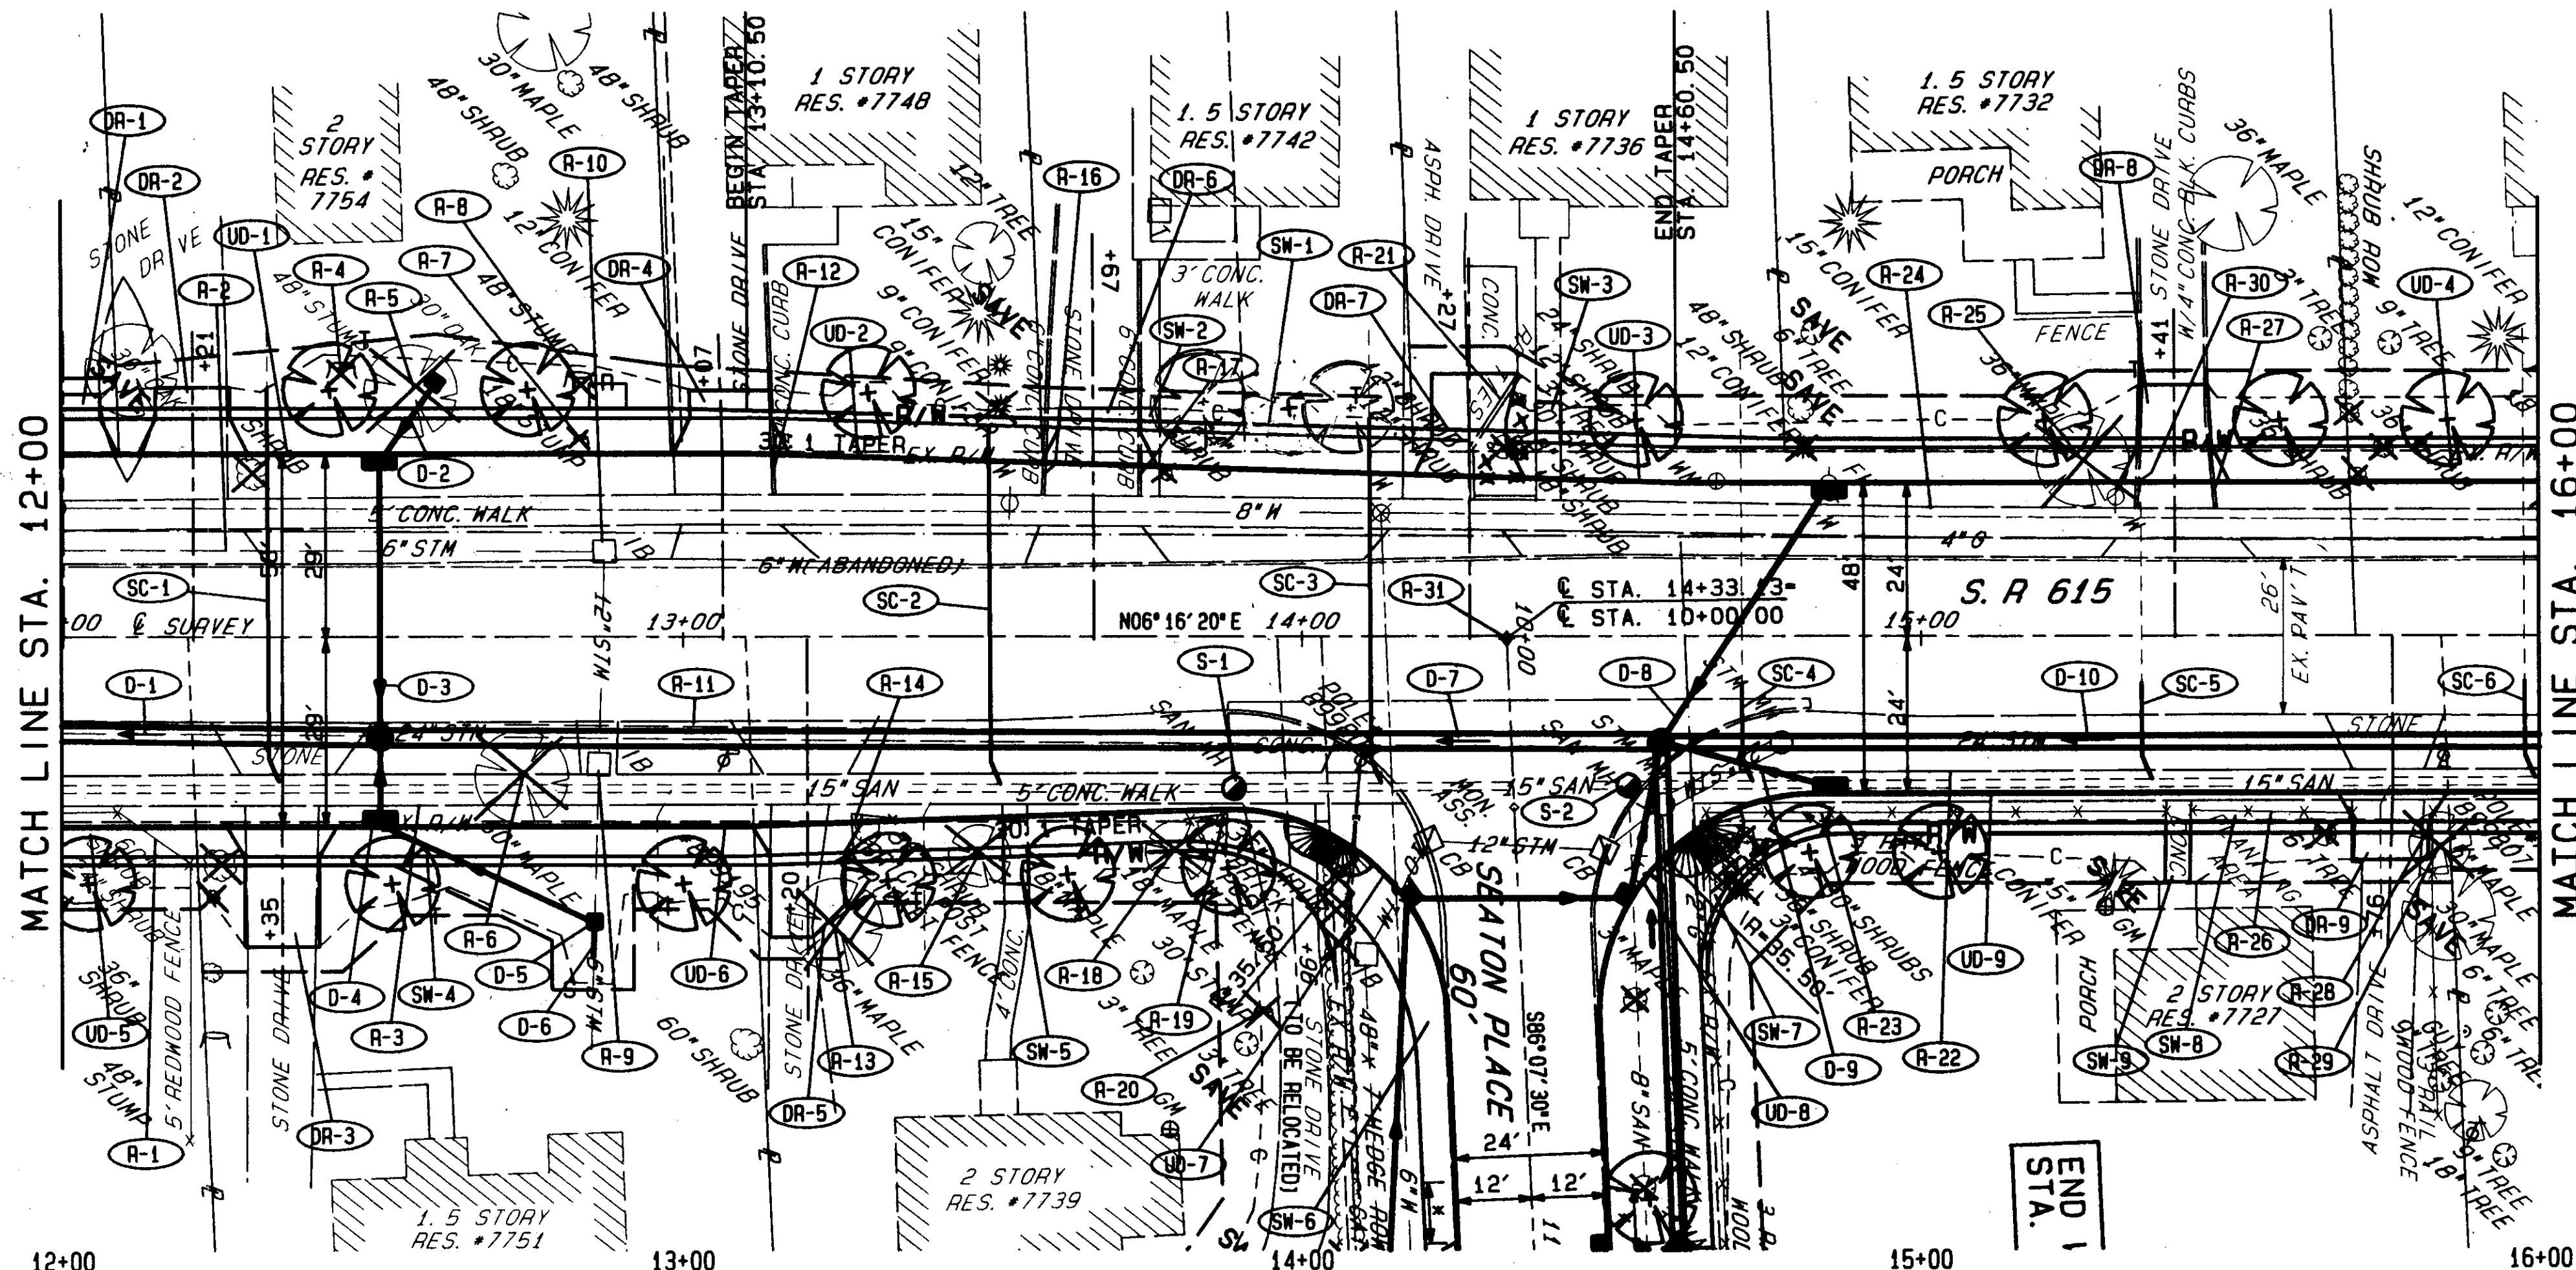

QUANTITIES HAVE BEEN CARRIED TO SUB-SUMMARY SHEETS 42-45

ITEM NO.	DESCRIPTION	UNIT	QUANTITY	REMARKS
604	MONUMENT ASSEMBLY	EA.	1	
202	FENCE REMOVED	L.F.	27	
202	CATCH BASIN OR INLET REMOVED	EA.	1	
202	MANHOLE REMOVED	EA.	1	
202	PIPE REMOVED 24" AND UNDER	L.F.	88	
202	CURB REMOVED	L.F.	30	
202	WALK REMOVED	S.F.	1075	
202	STRUCTURE REMOVED	LUMP	1	
201	TREE AND/OR STUMP REMOVED, 48" SIZE	EA.	1	
201	TREE AND/OR STUMP REMOVED, 30" SIZE	EA.	1	
201	TREE AND/OR STUMP REMOVED, 18" SIZE	EA.	1	
TOTALS				

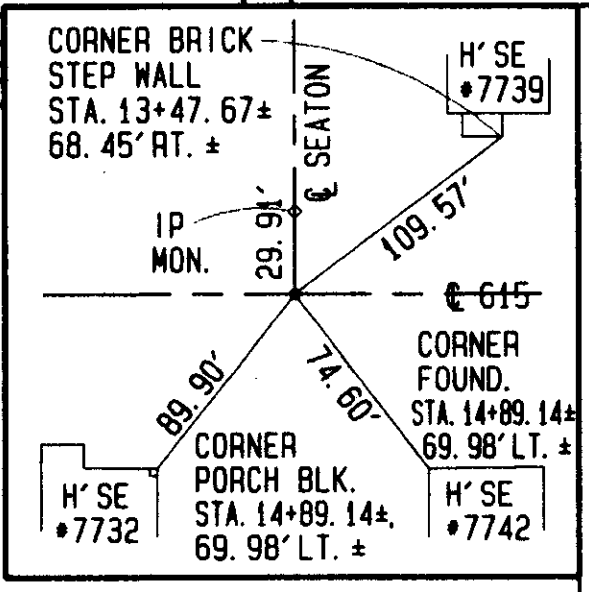

STATION	PROPOSED PROFILE ELEVATIONS	EXISTING PROFILE ELEVATIONS	DESCRIPTION
12+00	704.02	704.89	
12+00	703.93	704.78	
12+00	703.91	704.88	
13+00	703.85	704.88	
13+00	703.90	704.88	
13+00	703.97	704.88	
13+00	704.03	704.88	
13+00	704.21	704.99	
13+00	704.31	704.99	
13+00	704.39	704.99	
13+00	704.40	705.08	
14+00	704.36	705.16	
14+00	704.26	705.46	
14+00	704.23	705.46	
14+00	704.16	705.46	
14+00	704.16	705.46	
14+00	704.17	705.46	
14+00	704.29	705.55	
14+00	704.39	705.55	
14+00	704.45	705.55	
14+00	704.56	705.55	
14+00	704.61	705.55	
15+00	720	705.55	
15+00	715	705.55	
15+00	710	705.55	
15+00	705	705.55	
15+00	700	705.55	
15+00	695	705.55	
15+00	690	705.55	
15+00	685	705.55	
15+00	680	705.55	
15+00	675	705.55	

BENCH MARK #3
S. WESTERLY CORNER,
WING OF STAIRS RES. #7739
STA. 13+49.69 RT. ±
ELEV. 709.17

REF	LOCATION	DESCRIPTION	UNIT	QUANTITY
D-1	STA. 12+00.00 RT. TO STA. 12+51.00 RT.	36" CONDUIT, TYPE B AS PER PLAN, 706.02	L.F.	51
D-2	STA. 12+51.00 RT. TO STA. 12+51.00 RT.	30" CONDUIT, TYPE B AS PER PLAN, 706.02	L.F.	15
D-3	STA. 12+51.00 LT. TO STA. 12+51.00 RT.	12" CONDUIT, TYPE C AS PER PLAN, 706.02	L.F.	44
D-4	STA. 12+51.00 RT.	12" CONDUIT, TYPE B AS PER PLAN, 706.02	L.F.	12
D-5	STA. 12+51.00 RT. TO STA. 12+86.00 RT.	6" CONDUIT, TYPE C, AS PER PLAN, 706.08	L.F.	6
D-6	STA. 12+86.00 RT.			
D-7	STA. 12+51.00 RT. TO STA. 14+58.00 RT.			
D-8	STA. 14+58.00 LT. TO STA. 14+58.00 RT.			
D-9	STA. 14+58.00 LT. TO STA. 14+58.00 RT.			
D-10	STA. 14+58.00 RT. TO STA. 16+00.00 RT.			
S-1	STA. 13+88.93 RT.			
S-2	STA. 14+52.73 RT.			
TOTALS				6 133 54 142 258

FOR STORM SEWER CONNECTION SCHEDULE SEE SHEET 46
FOR SANITARY SEWER CONNECTION SCHEDULE SEE SHEET 47
FOR TYPICAL SECTIONS SEE SHEETS 4-10
FOR SIDEWALK PLAN & PROFILE SEE SHEET 77
FOR CROSS SECTIONS SEE SHEETS 106-108
FOR SIDEWALK CROSS SECTIONS SEE SHEET 120
FOR UNDERDRAIN QUANTITIES SEE SHEETS 40-41
FOR DRIVEWAY PROFILES SEE SHEETS 130-132
FOR INTERSECTION DETAIL SEE SHEET 142
FOR CATCH BASIN DETAILS SEE SHEETS 145-146
FOR SANITARY SEWER DETAILS SEE SHEETS 147-148
FOR ROADWAY DETAILS SEE SHEET 149
FOR DRIVEWAY DETAILS SEE SHEETS 150-151
FOR PAVEMENT MARKING PLANS SEE SHEET 160
FOR STONING PLANS SEE SHEET 164