


LAKE COUNTY  
ASHTABULA COUNTY  
LAK.-1-12.89  
ATB.-1-0.00

### S-GE

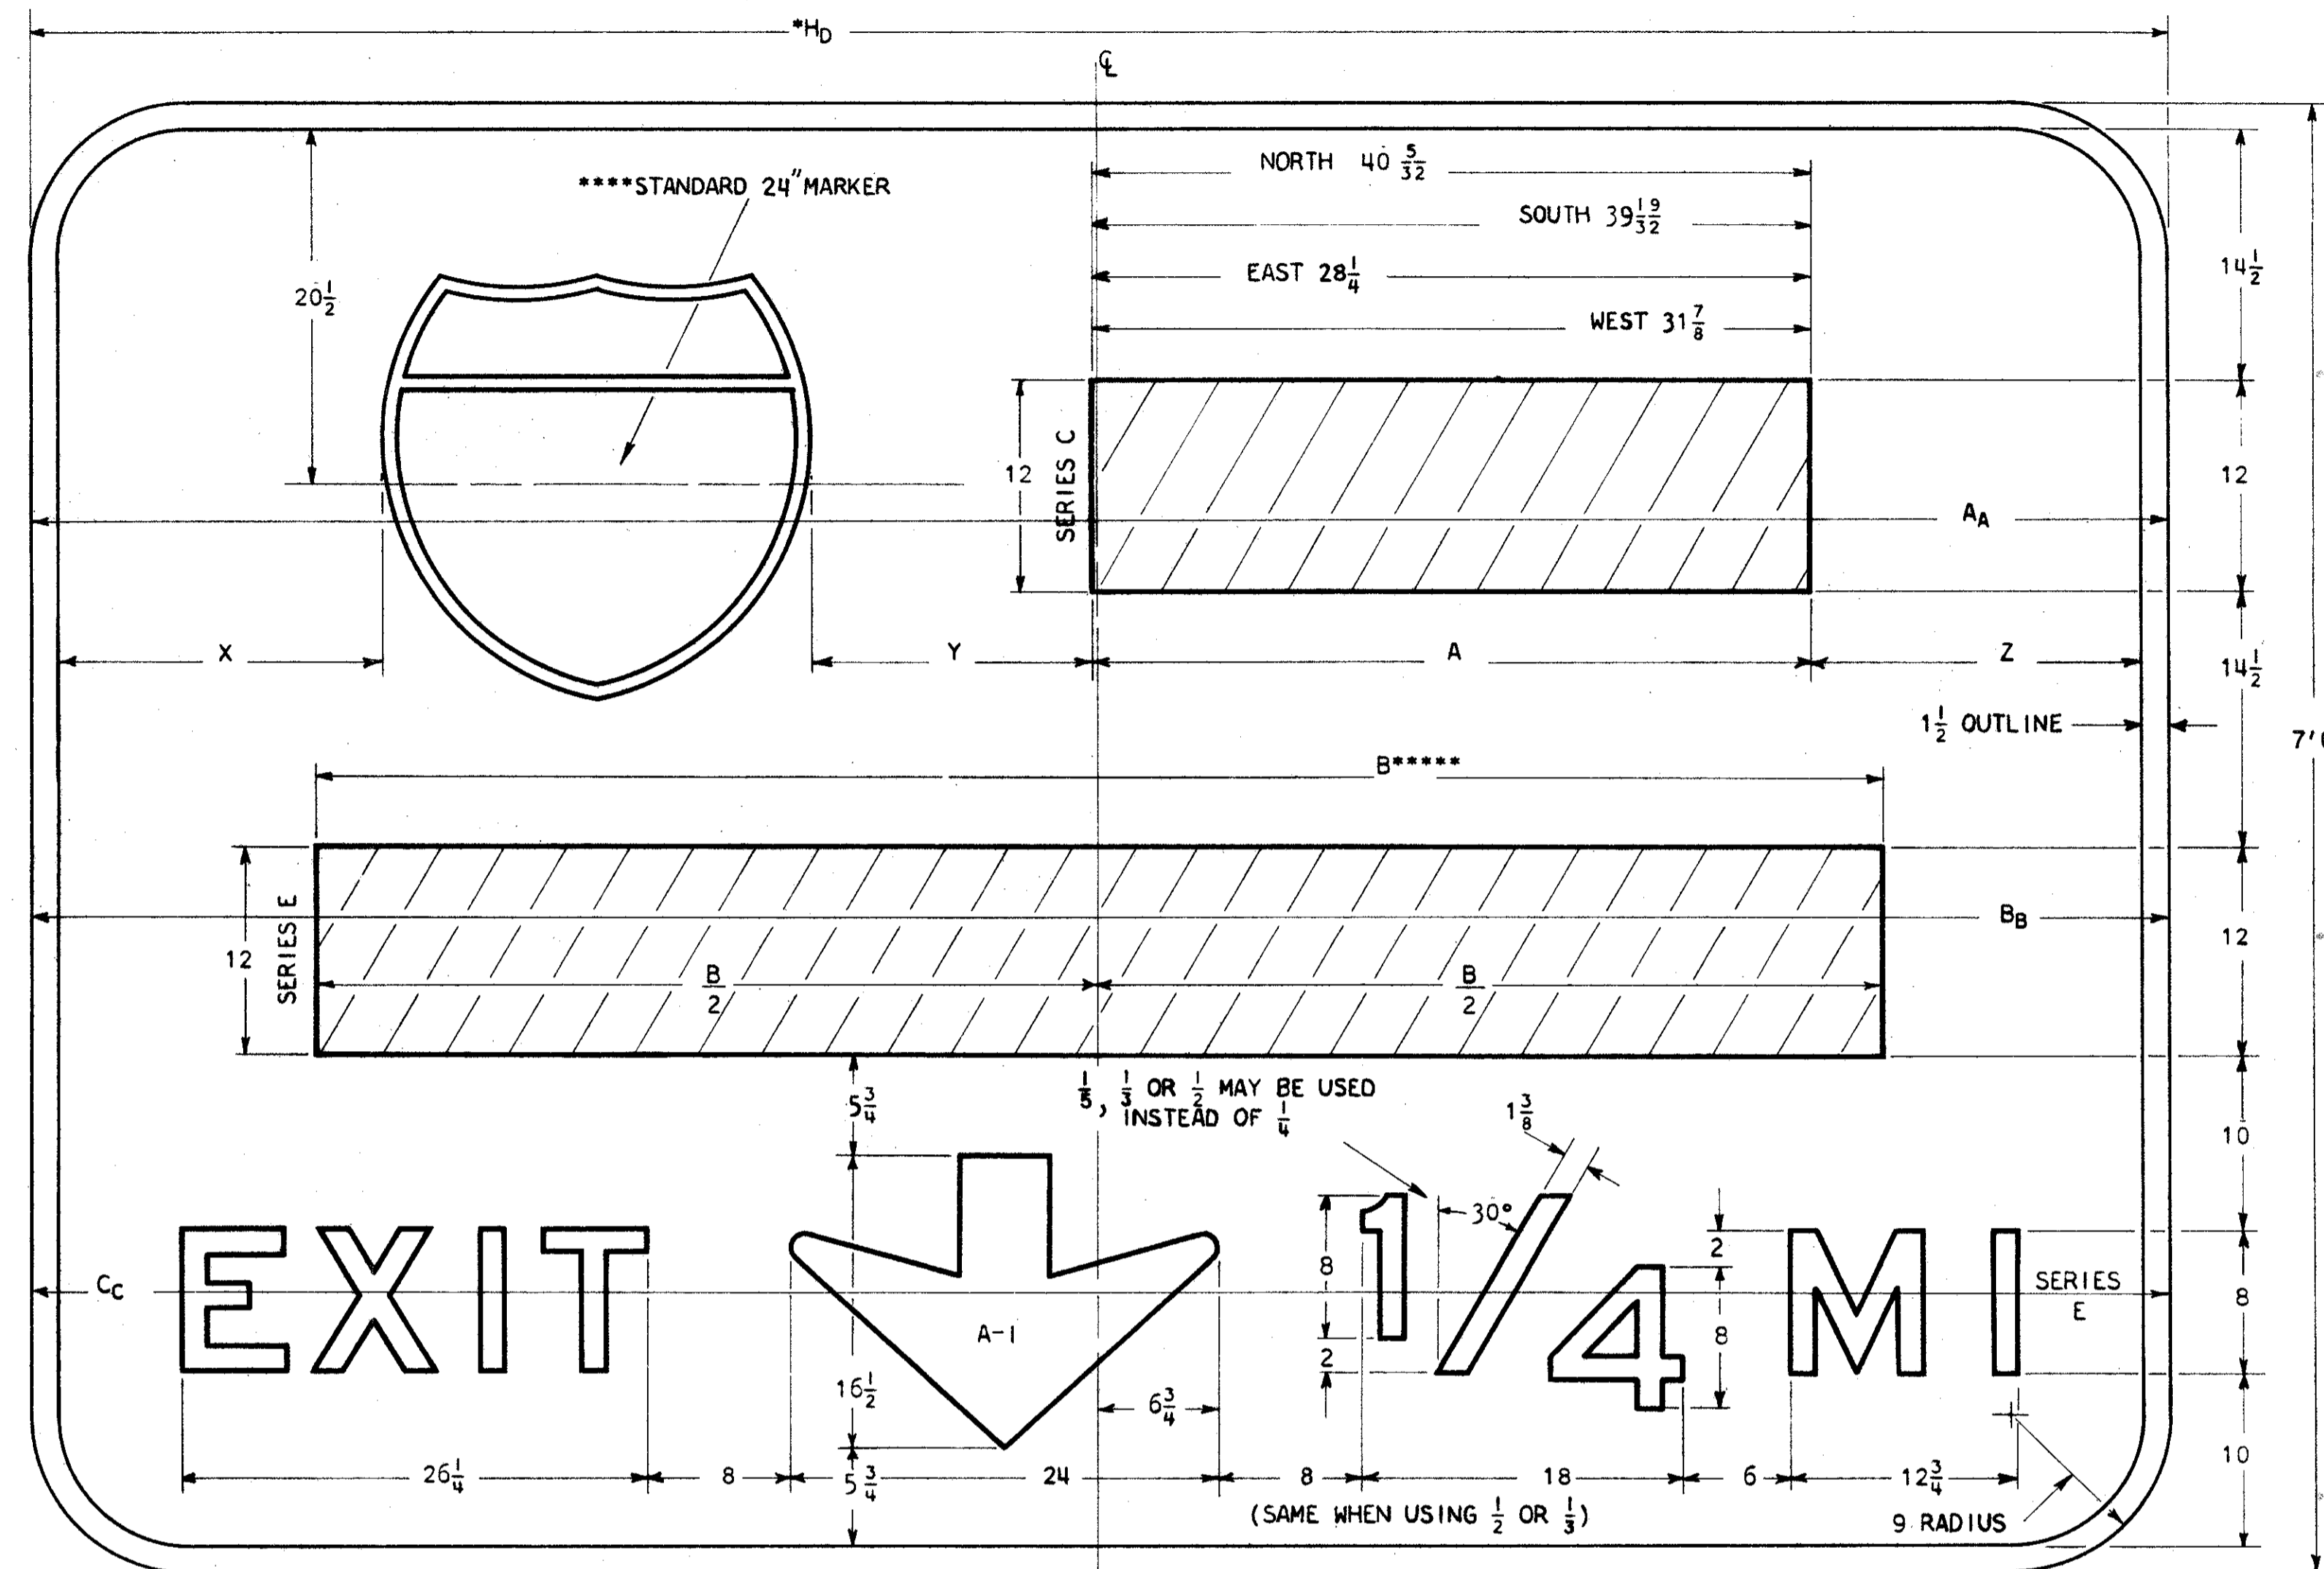

NOTES:

\*TO FIND H<sub>0</sub>  
H<sub>0</sub> IS DETERMINED BY A<sub>A</sub>, B<sub>B</sub> OR C<sub>C</sub> WHICHEVER IS GREATEST.

TO FIND A<sub>A</sub>  
A + 64" ± (\*\* ) = A<sub>A</sub> (SEE NOTE\*\*\*)

TO FIND B<sub>B</sub>  
B + 27" ± (\*\* ) = B<sub>B</sub>

TO FIND C<sub>C</sub>  
C<sub>C</sub> = 10' - 0"

\*\*ADD OR SUBTRACT UP TO 3" TO KEEP H<sub>0</sub> TO EVEN FOOT OR HALF FOOT.

SPACES X, Y, AND Z SHALL BE EQUAL EXCEPT THAT Y SHALL NEVER EXCEED 16". X AND Z SHALL ALWAYS BE EQUAL.

\*\*\*DESIGN SHOWN IS FOR ONE ROUTE MARKER. INCREASE A<sub>A</sub> 36" FOR EACH ADDITIONAL ROUTE MARKER. SPACE BETWEEN ROUTE MARKERS SHALL BE EQUAL TO Y.

\*\*\*\*OHIO AND U.S. MARKERS SHALL HAVE BLACK NUMERALS AND BORDER ON WHITE BACKGROUND. INTERSTATE MARKERS SHALL BE RED, WHITE AND BLUE.

\*\*\*\*\*B SHALL BE COMPUTED BY DOUBLING THE SPACING GIVEN IN THE "OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS" FOR 12" LETTERS.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SHOWN.

TYPICAL SIGNS

