


TYPICAL SECTIONS

FED. RD. DIVISION	STATE	PROJECT	
2	OHIO	ACI-1103 (21)	7 488

LAKE COUNTY
LAK-1-12.89

SCALE: $\frac{3}{8}'' = 1'-0''$

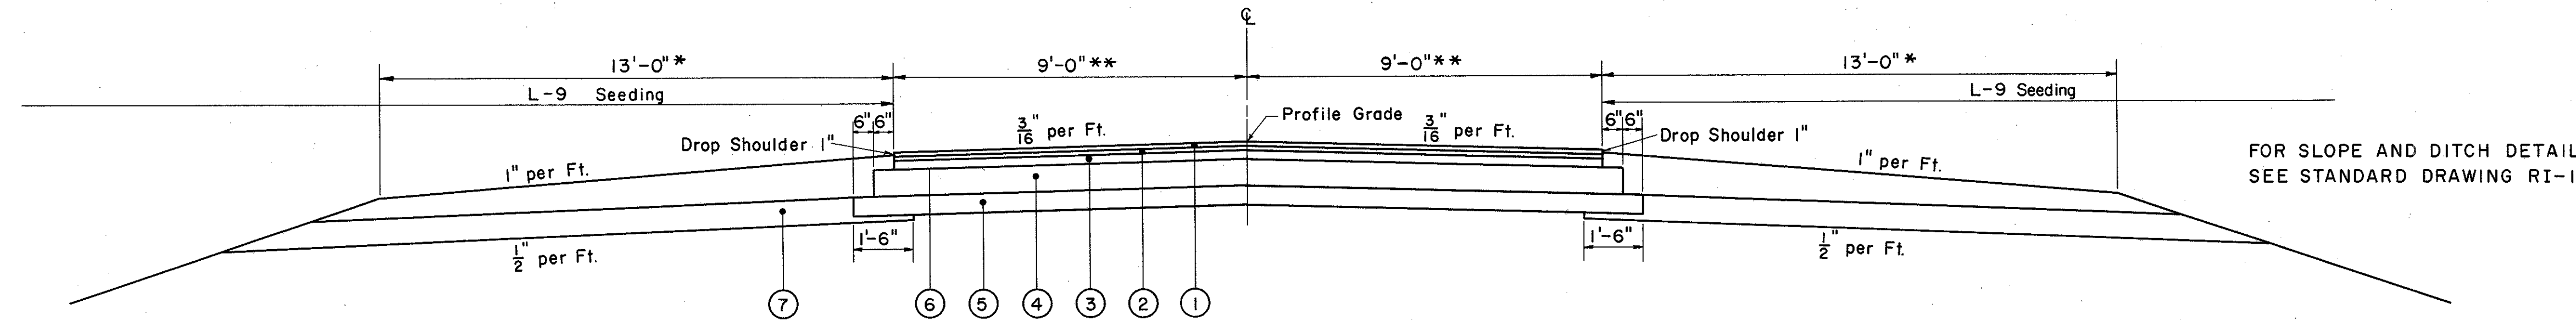

FOR SLOPE AND DITCH DETAILS
SEE STANDARD DRAWING RI-1

- LEGEND**
- ① T-35 $1\frac{1}{4}''$ Asphaltic Concrete Surface Course Type A (70-80)
 - ② B-35 $1\frac{1}{4}''$ Asphaltic Concrete Leveling Course (70-80)
 - ③ B-35 $2\frac{3}{4}''$ Asphaltic Concrete Base Course (70-80)
 - ④ B-119 8" Crushed Aggregate Base Course
 - ⑤ I-22 6" Subbase
 - ⑥ T-30 Bituminous Prime Coat. Sec. M-53, MC-0, MC-1, or Sec. M-5.7 RT-2 or 3 Applied at the rate of 0.35 Gal. per Sq. Yd.
 - ⑦ I-9 Stone Underdrain (No.2) Staggered at 50' Intervals or as directed by Engineer.


TYPICAL NORMAL SECTION
S.R. 86 & S.R. 44 (Existing)

* 11'-0" on S.R. 44 (Existing)
** 11'-0" on S.R. 44 (Existing)

LIMITING STATIONS

S.R. 86
STA. 24+00.00 TO STA. 26+08.47 = 208.47 LIN. FT.
STA. 36+56.93 TO STA. 40+25.00 = 368.07 LIN. FT.
TOTAL = 576.54 LIN. FT.

S.R. 44
STA. 25+00 TO STA. 35+00 = 1000.00 LIN. FT.
DEDUCT FOR BRIDGE = 268.54 LIN. FT.
TOTAL = 731.46 LIN. FT.

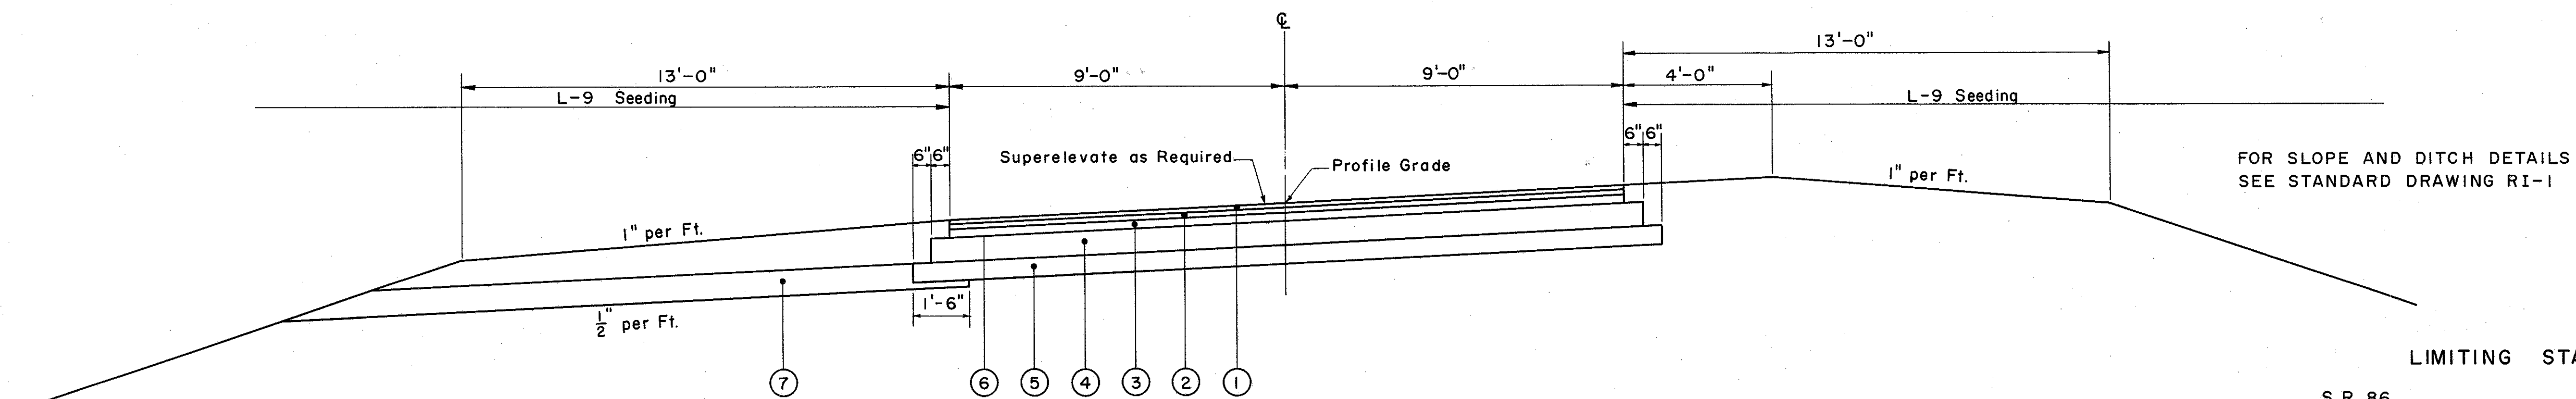

FOR SLOPE AND DITCH DETAILS
SEE STANDARD DRAWING RI-1

TYPICAL SUPERELEVATED SECTION
S.R. 86

LIMITING STATIONS

S.R. 86
STA. 24+50 TO STA. 39+50 = 1500.00 LIN. FT.
DEDUCT FOR BRIDGE = 387.83 LIN. FT.
TOTAL = 1112.17 LIN. FT.