
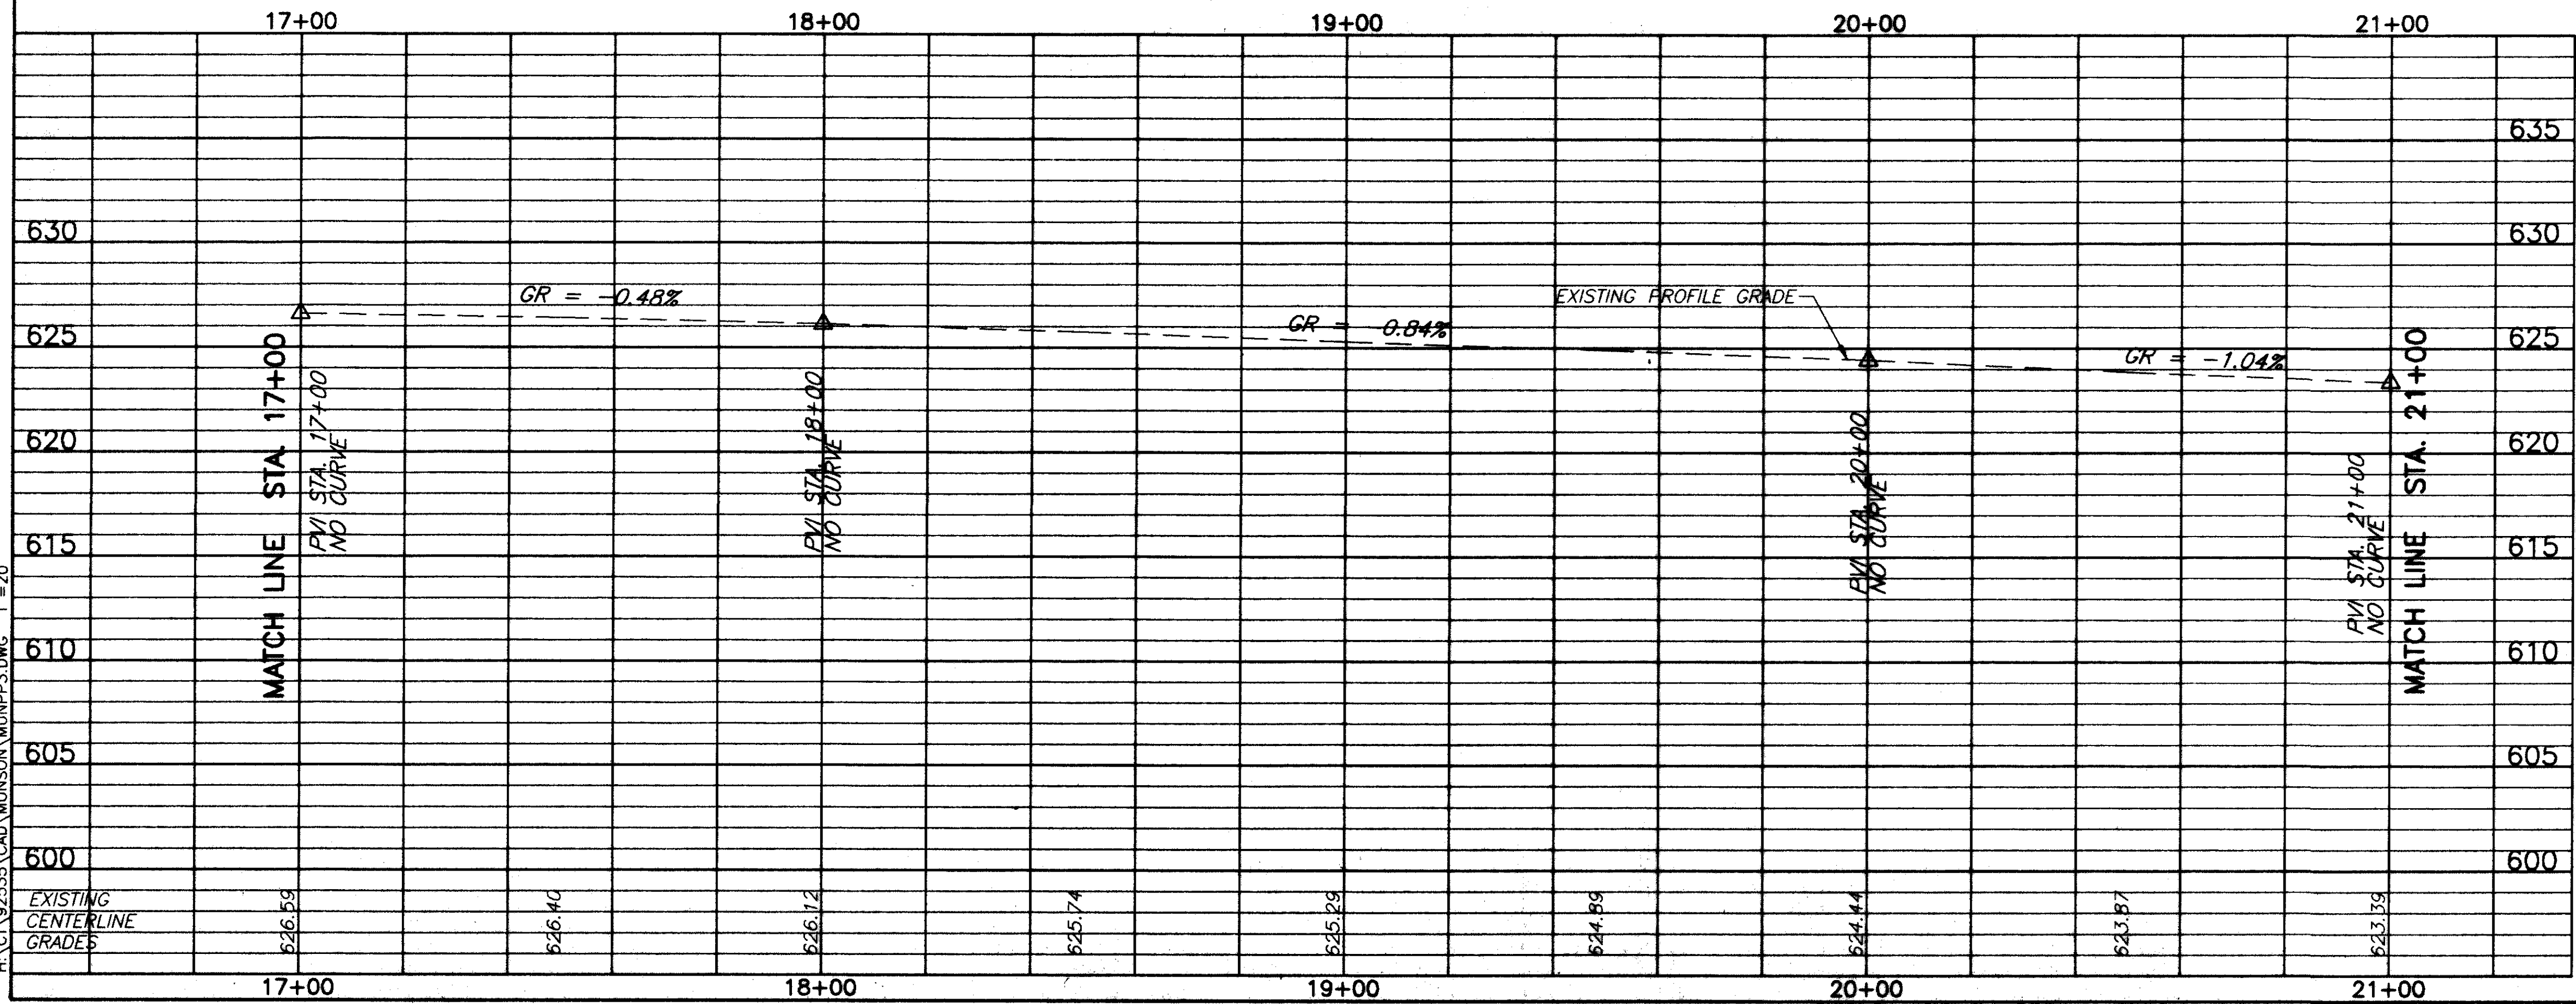


FOR TYPICAL SECTIONS SEE SHEETS 5 THRU 6
 FOR CROSS-SECTIONS SEE SHEETS 48 THRU 79
 FOR DRIVEWAY SCHEDULE & DETAILS SEE SHEETS 21 THRU 22
 FOR PAVEMENT DETAILS SEE SHEET 171
 FOR TRAFFIC CONTROL DETAILS SEE SHEETS 172 THRU 198

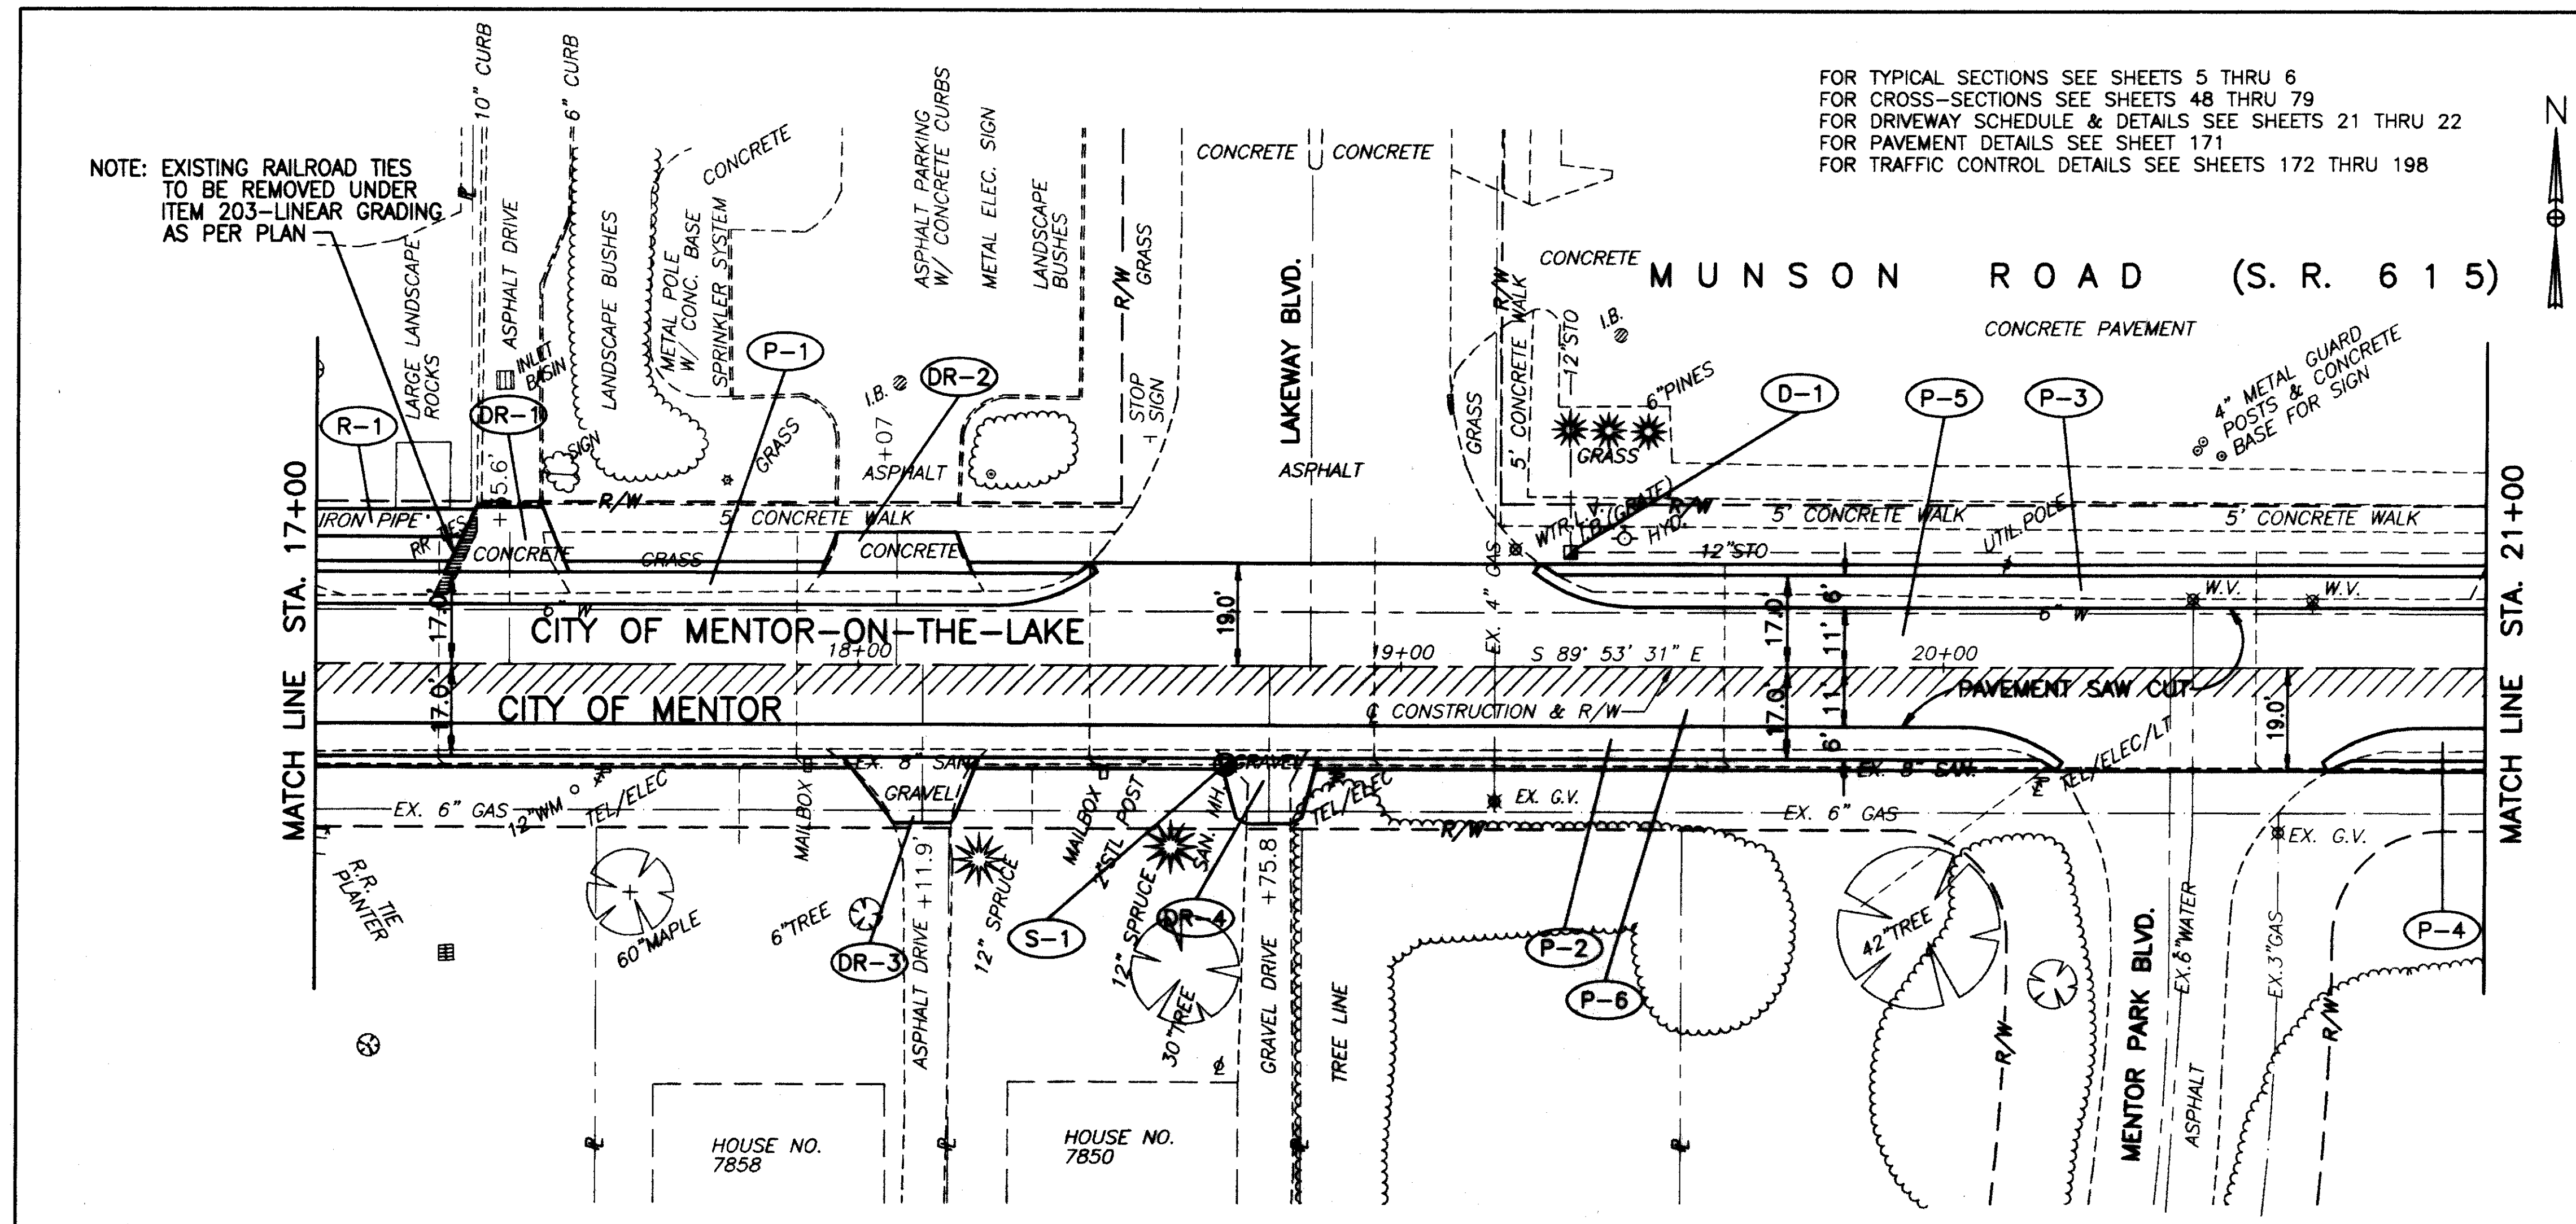

RESURFACING PROGRAM (IN MENTOR)	QTY	UNIT	AMOUNT	AMOUNT	AMOUNT
1-1/4" ASPH. CONC. SURFACE COURSE, TYPE 1, PG64-22	448	CU.YD.			
1/2" AVG. ASPH. CONC. INTERMEDIATE COURSE, TYPE 2, PG64-22	448	CU.YD.			
TACK COAT (0.10 GAL./SQ.YD.)	448	GAL.			
PAVEMENT PLANNING, BITUMINOUS	254	SQ.YD.			
1-1/4" ASPH. CONC. SURFACE COURSE, TYPE 1, PG64-22	448	CU.YD.			
BITUMINOUS PRIME COAT (0.40 GAL./SQ.YD.)	448	GAL.			
TACK COAT (0.10 GAL./SQ.YD.)	448	GAL.			
6" AGGREGATE BASE, AS PER PLAN	304	CU.YD.			
6" BITUMINOUS AGGREGATE BASE, PG64-22	304	CU.YD.			
8 3/4" BITUMINOUS AGGREGATE BASE, PG64-22	304	CU.YD.			
SUBGRADE COMPACTION	203	SQ.YD.			
EXCAVATION NOT INCLUDING EMBANKMENT CONSTRUCTION	203	CU.YD.			
TOTALS			112.4	226.7	56.1

PAVEMENT	LOCATION	AMOUNT	AMOUNT
P-2	STA. 17+00 TO 20+22, RT. = 1886 S.F.		
P-4	STA. 20+70 TO 21+00, RT. = 144 S.F.		
P-6	STA. 17+00 TO 22+00, RT. = 4860 S.F.		
TOTALS			

RESURFACING PROGRAM (IN MENTOR-ON-THE-LAKE)	QTY	UNIT	AMOUNT	AMOUNT	AMOUNT
1-1/4" ASPH. CONC. SURFACE COURSE, TYPE 1, PG64-22	448	CU.YD.			
1/2" AVG. ASPH. CONC. INTERMEDIATE COURSE, TYPE 2, PG64-22	448	CU.YD.			
TACK COAT (0.10 GAL./SQ.YD.)	448	GAL.			
PAVEMENT PLANNING, BITUMINOUS	254	SQ.YD.			
1-1/4" ASPH. CONC. SURFACE COURSE, TYPE 1, PG64-22	448	CU.YD.			
BITUMINOUS PRIME COAT (0.40 GAL./SQ.YD.)	448	GAL.			
TACK COAT (0.10 GAL./SQ.YD.)	448	GAL.			
6" AGGREGATE BASE, AS PER PLAN	304	CU.YD.			
6" BITUMINOUS AGGREGATE BASE, PG64-22	304	CU.YD.			
8 3/4" BITUMINOUS AGGREGATE BASE, PG64-22	304	CU.YD.			
SUBGRADE COMPACTION	203	SQ.YD.			
EXCAVATION NOT INCLUDING EMBANKMENT CONSTRUCTION	203	CU.YD.			
TOTALS			96.2	204.6	46.7

PAVEMENT	LOCATION	AMOUNT	AMOUNT
P-1	STA. 17+00 TO 18+44, LT. = 822 S.F.		
P-3	STA. 19+24 TO 21+00, LT. = 1020 S.F.		
P-5	STA. 17+00 TO 22+00, LT. = 5121 S.F.		
TOTALS			

ROADWAY		
REF	LOCATION	SQ.FT.
R-1	STA. 17+00 TO STA. 17+29, LT.	141
TOTALS		141

DRAINAGE & SANITARY			
REF	LOCATION	EACH	EACH
D-1	STA. 19+31 21' LT.	1	
S-1	STA. 18+67 18' RT.		1
TOTALS		1	1

MUNSON ROAD PLAN & PROFILE STA. 17+00 TO STA. 21+00