


# TYPICAL SECTIONS


FED. RD. DIVISION	STATE	PROJECT
2	OHIO	ACI-1103 (29)

4  
280

LAKE COUNTY  
LAK-1-22.60

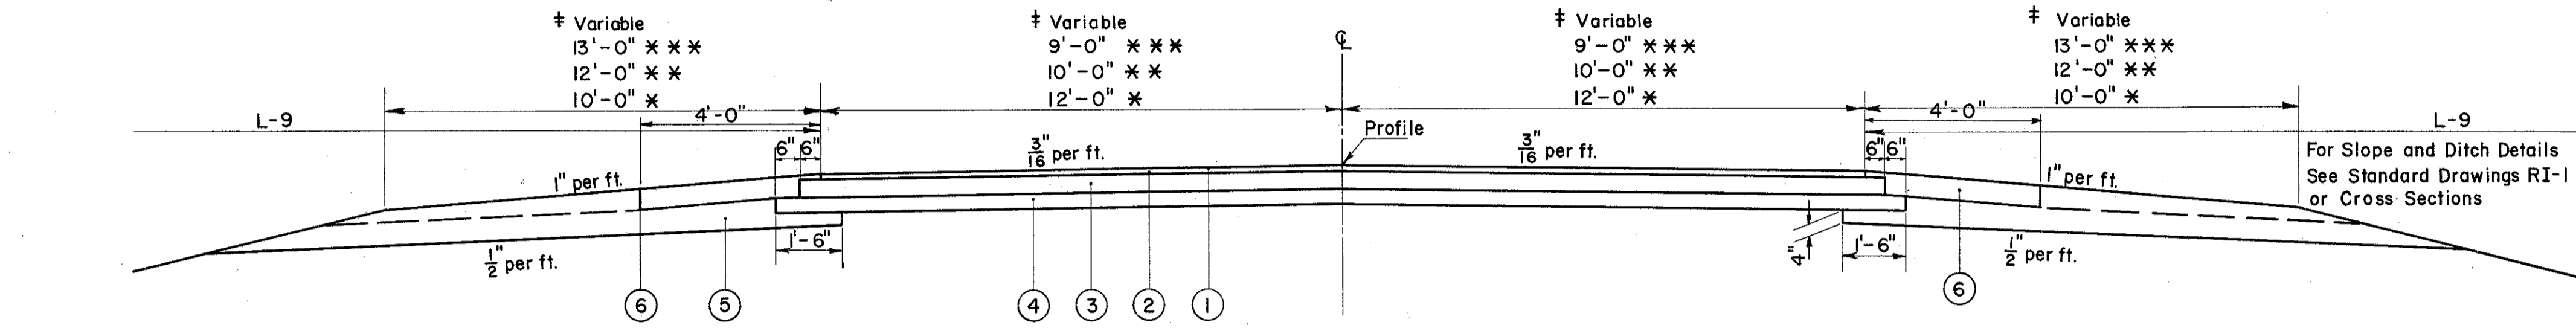

NORMAL SECTION

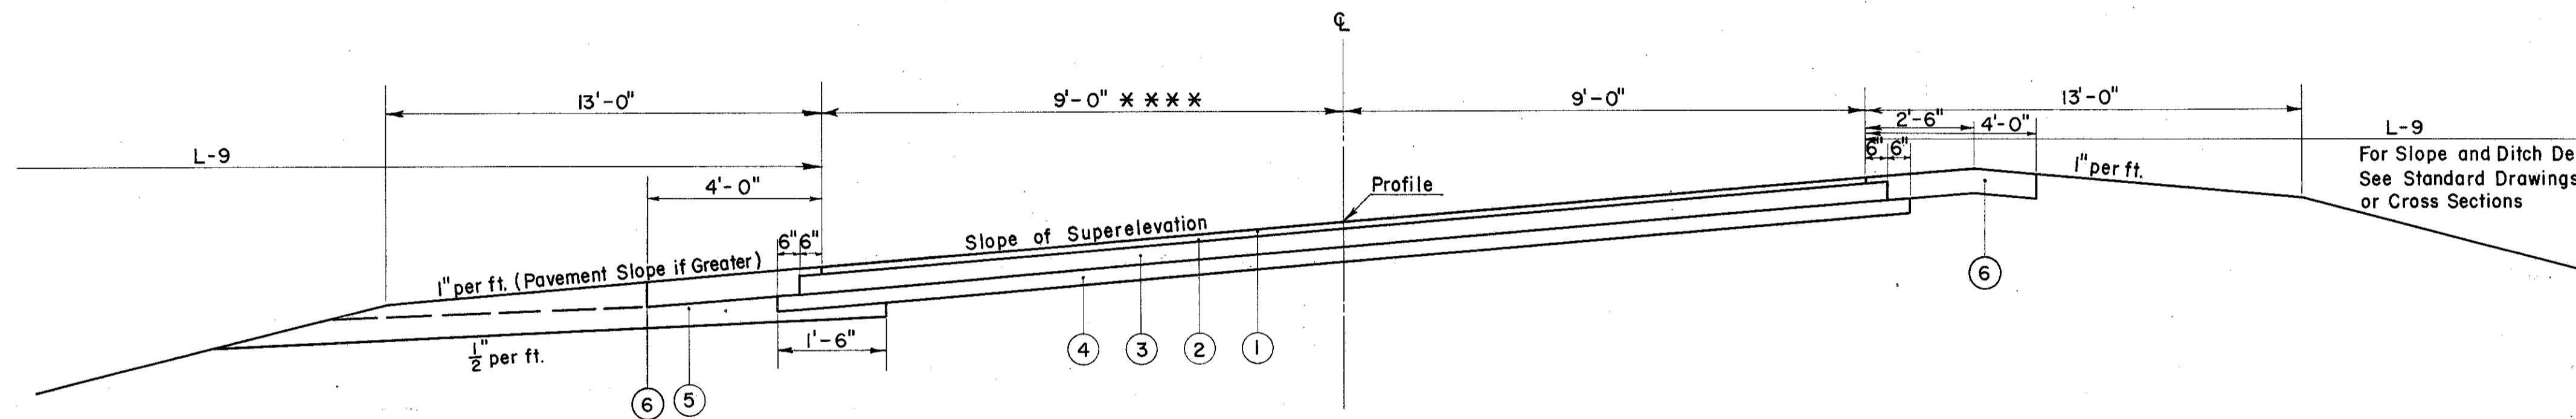

SUPERELEVATED SECTION

LEGEND

- ① T-35 1/2" Asphaltic Concrete Surface Course Type A (85-100)
- ② T-30 Bituminous Prime Coat. Sec. M-5.3, MC-0, or MC-1 or Sec. M-5.7, RT-2 or RT-3, at 0.35 Gal. per Sq. Yd.
- ③ B-119 5" Crushed Aggregate Base Course
- ④ I-22 4" Subbase
- ⑤ I-9 Stone Underdrain (No.2) Staggered at 50' Intervals
- ⑥ I-18 6" Crushed Aggregate Shoulders and Approaches (Stabilized).

LIMITING STATIONS

*** S.R. 307			
STA. 67+00	TO STA. 70+75	=	375 LIN. FT.
STA. 80+00	TO STA. 82+50	=	250 LIN. FT.
STA. 97+00	TO STA. 105+75	=	875 LIN. FT.
STA. 112+25	TO STA. 113+00	=	75 LIN. FT.
DEDUCT FOR BRIDGE		=	387.27 LIN. FT.
TOTAL		=	1187.73 LIN. FT.

LIMITING STATIONS

S.R. 528			
** STA. 18+00	TO STA. 22+63.50	=	463.50 LIN. FT.
† STA. 22+63.50	TO STA. 24+63.50	=	200.00 LIN. FT.
* STA. 24+63.50	TO STA. 39+36.09	=	1472.59 LIN. FT.
† STA. 39+36.09	TO STA. 41+36.09	=	200.00 LIN. FT.
** STA. 41+36.09	TO STA. 42+75	=	138.91 LIN. FT.
DEDUCT FOR BRIDGE		=	299.94 LIN. FT.
TOTAL 20' PAVT.		=	602.41 LIN. FT.
TOTAL 24' PAVT.		=	1176.65 LIN. FT.
TOTAL † TAPERS		=	400.00 LIN. FT.
GRAND TOTAL		=	2179.06 LIN. FT.

LIMITING STATIONS

*** S.R. 307			
STA. 70+75	TO STA. 80+00	=	925 LIN. FT.
STA. 82+50	TO STA. 97+00	=	1450 LIN. FT.
STA. 105+75	TO STA. 112+25	=	650 LIN. FT.
TOTAL		=	3025 LIN. FT.

\*\*\* FOR WIDENING SEE SUPERELEVATION TABLES SHEET NO. 6