


FOR TYPICAL SECTION SEE SHEET 11
 FOR CROSS SECTIONS SEE SHEET 113 THRU 115
 FOR SIGNING PLAN SEE SHEET 152
 FOR PAVEMENT MARKING DETAILS SEE SHEET 154
 FOR DRIVEWAY PROFILES SEE SHEET 142
 FOR DRIVEWAY DETAILS SEE SHEET 149
 FOR CURB DETAILS SEE SHEET 144
 FOR DRAINAGE DETAILS SEE SHEET 144
 FOR PAVEMENT REPLACEMENT DETAILS SEE SHEET 144

*NOTE: TAPER CURB HEIGHT FROM 6" TO 0" IN 10'-0".

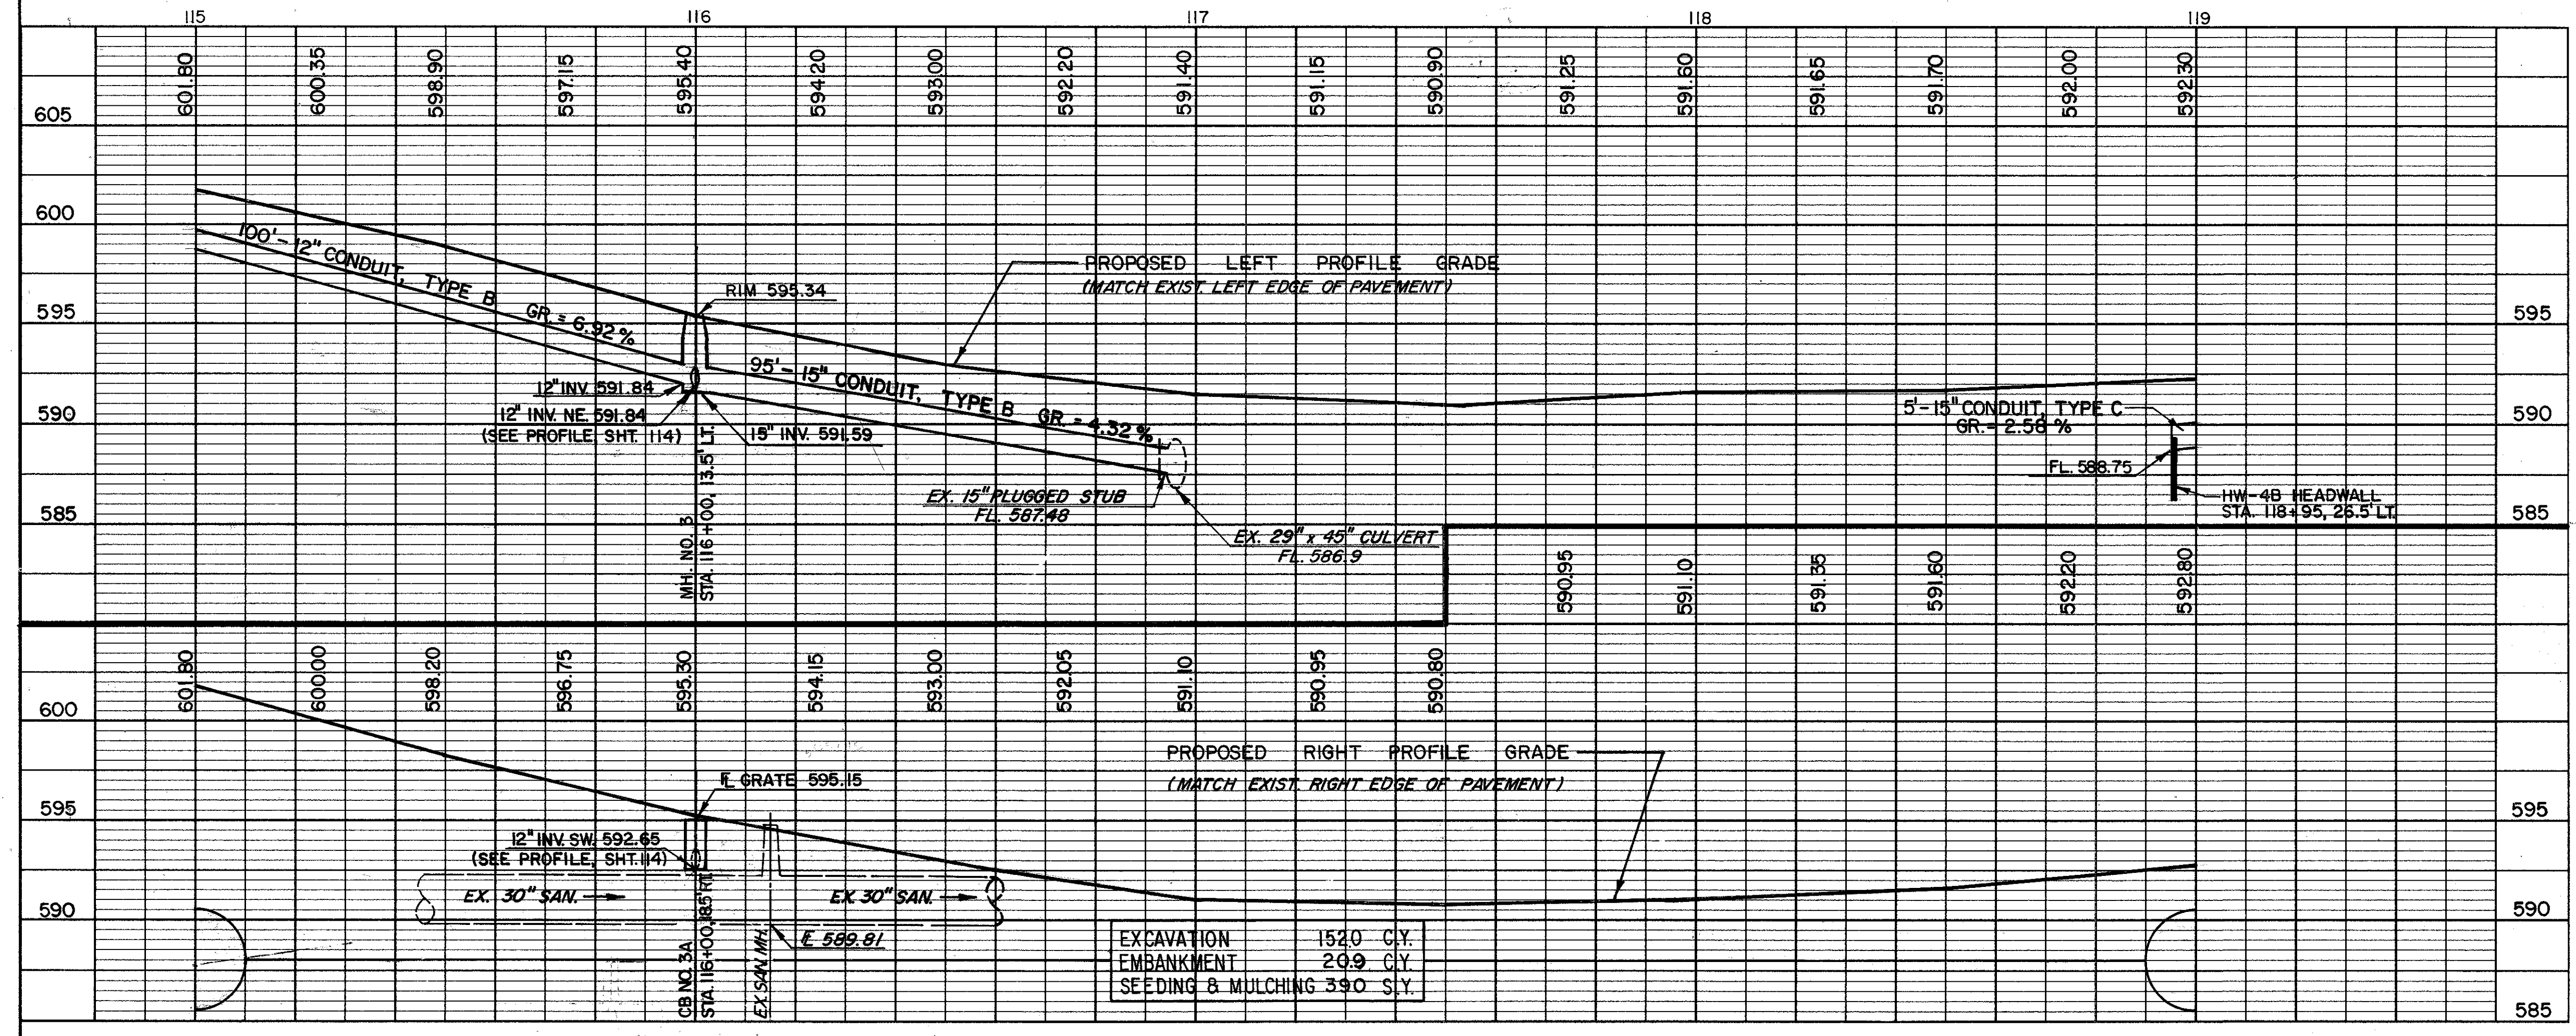

EXCAVATION	1520 C.Y.
EMBANKMENT	209 C.Y.
SEEDING & MULCHING	390 S.Y.

DRAINAGE		603	603	604	604	603	601	602
REF.	LOCATION	L.F.	L.F.	EA.	EA.	L.F.	C.Y.	C.Y.
D-1	STA. 115+00 TO 116+00, 13.5' LT.	100						
D-2	STA. 116+00 TO 116+95, 13.5' LT.		95					
D-3	STA. 116+00, 18.5' RT. TO 116+00, 13.5' LT.	32						
D-4	STA. 116+00, 18.5' RT.			1				
D-5	STA. 116+00, 13.5' LT.				1			
D-6	STA. 118+95, 26.5' LT. TO STA. 119+00, 26' LT.					5		
D-7	STA. 118+95, 26.5' LT.						1.1	0.25
TOTALS		132	95	1	1	5	1.1	0.25

ROADWAY		202	606	606	606	606	606
REF.	LOCATION	L.F.	L.F.	L.F.	EA.	EA.	EA.
R-1	STA. 115+98 TO 117+63, LT.	165					
R-2	STA. 118+30 TO 118+96, LT.	62					
R-3	STA. 116+70 TO 118+79, RT.	213					
R-4	STA. 115+20 TO 117+78, LT.		12.5	212.5		1	1
R-5	STA. 116+65 TO 118+32, RT.		12.5	150		1	1
R-6	STA. 118+13 TO 118+31, LT.		12.5	1			
R-7	STA. 118+60 TO 119+00, LT.		40	1			
R-8	STA. 118+46 TO 119+00, RT.		45	1			
TOTALS		440	37.5	460	4	1	2