


FOR TYPICAL SECTIONS, SEE SHEETS 5 THRU 15
 FOR CROSS SECTIONS AND PIPE PROFILES, SEE SHEETS 233 THRU 245
 FOR SUPERELEVATION TABLES, SEE SHEETS 246 THRU 254
 FOR INTERSECTION DETAILS, SEE SHEETS 255 THRU 262
 FOR SIGNING AND PAVEMENT MARKING PLAN, SEE SHEETS 315 THRU 317

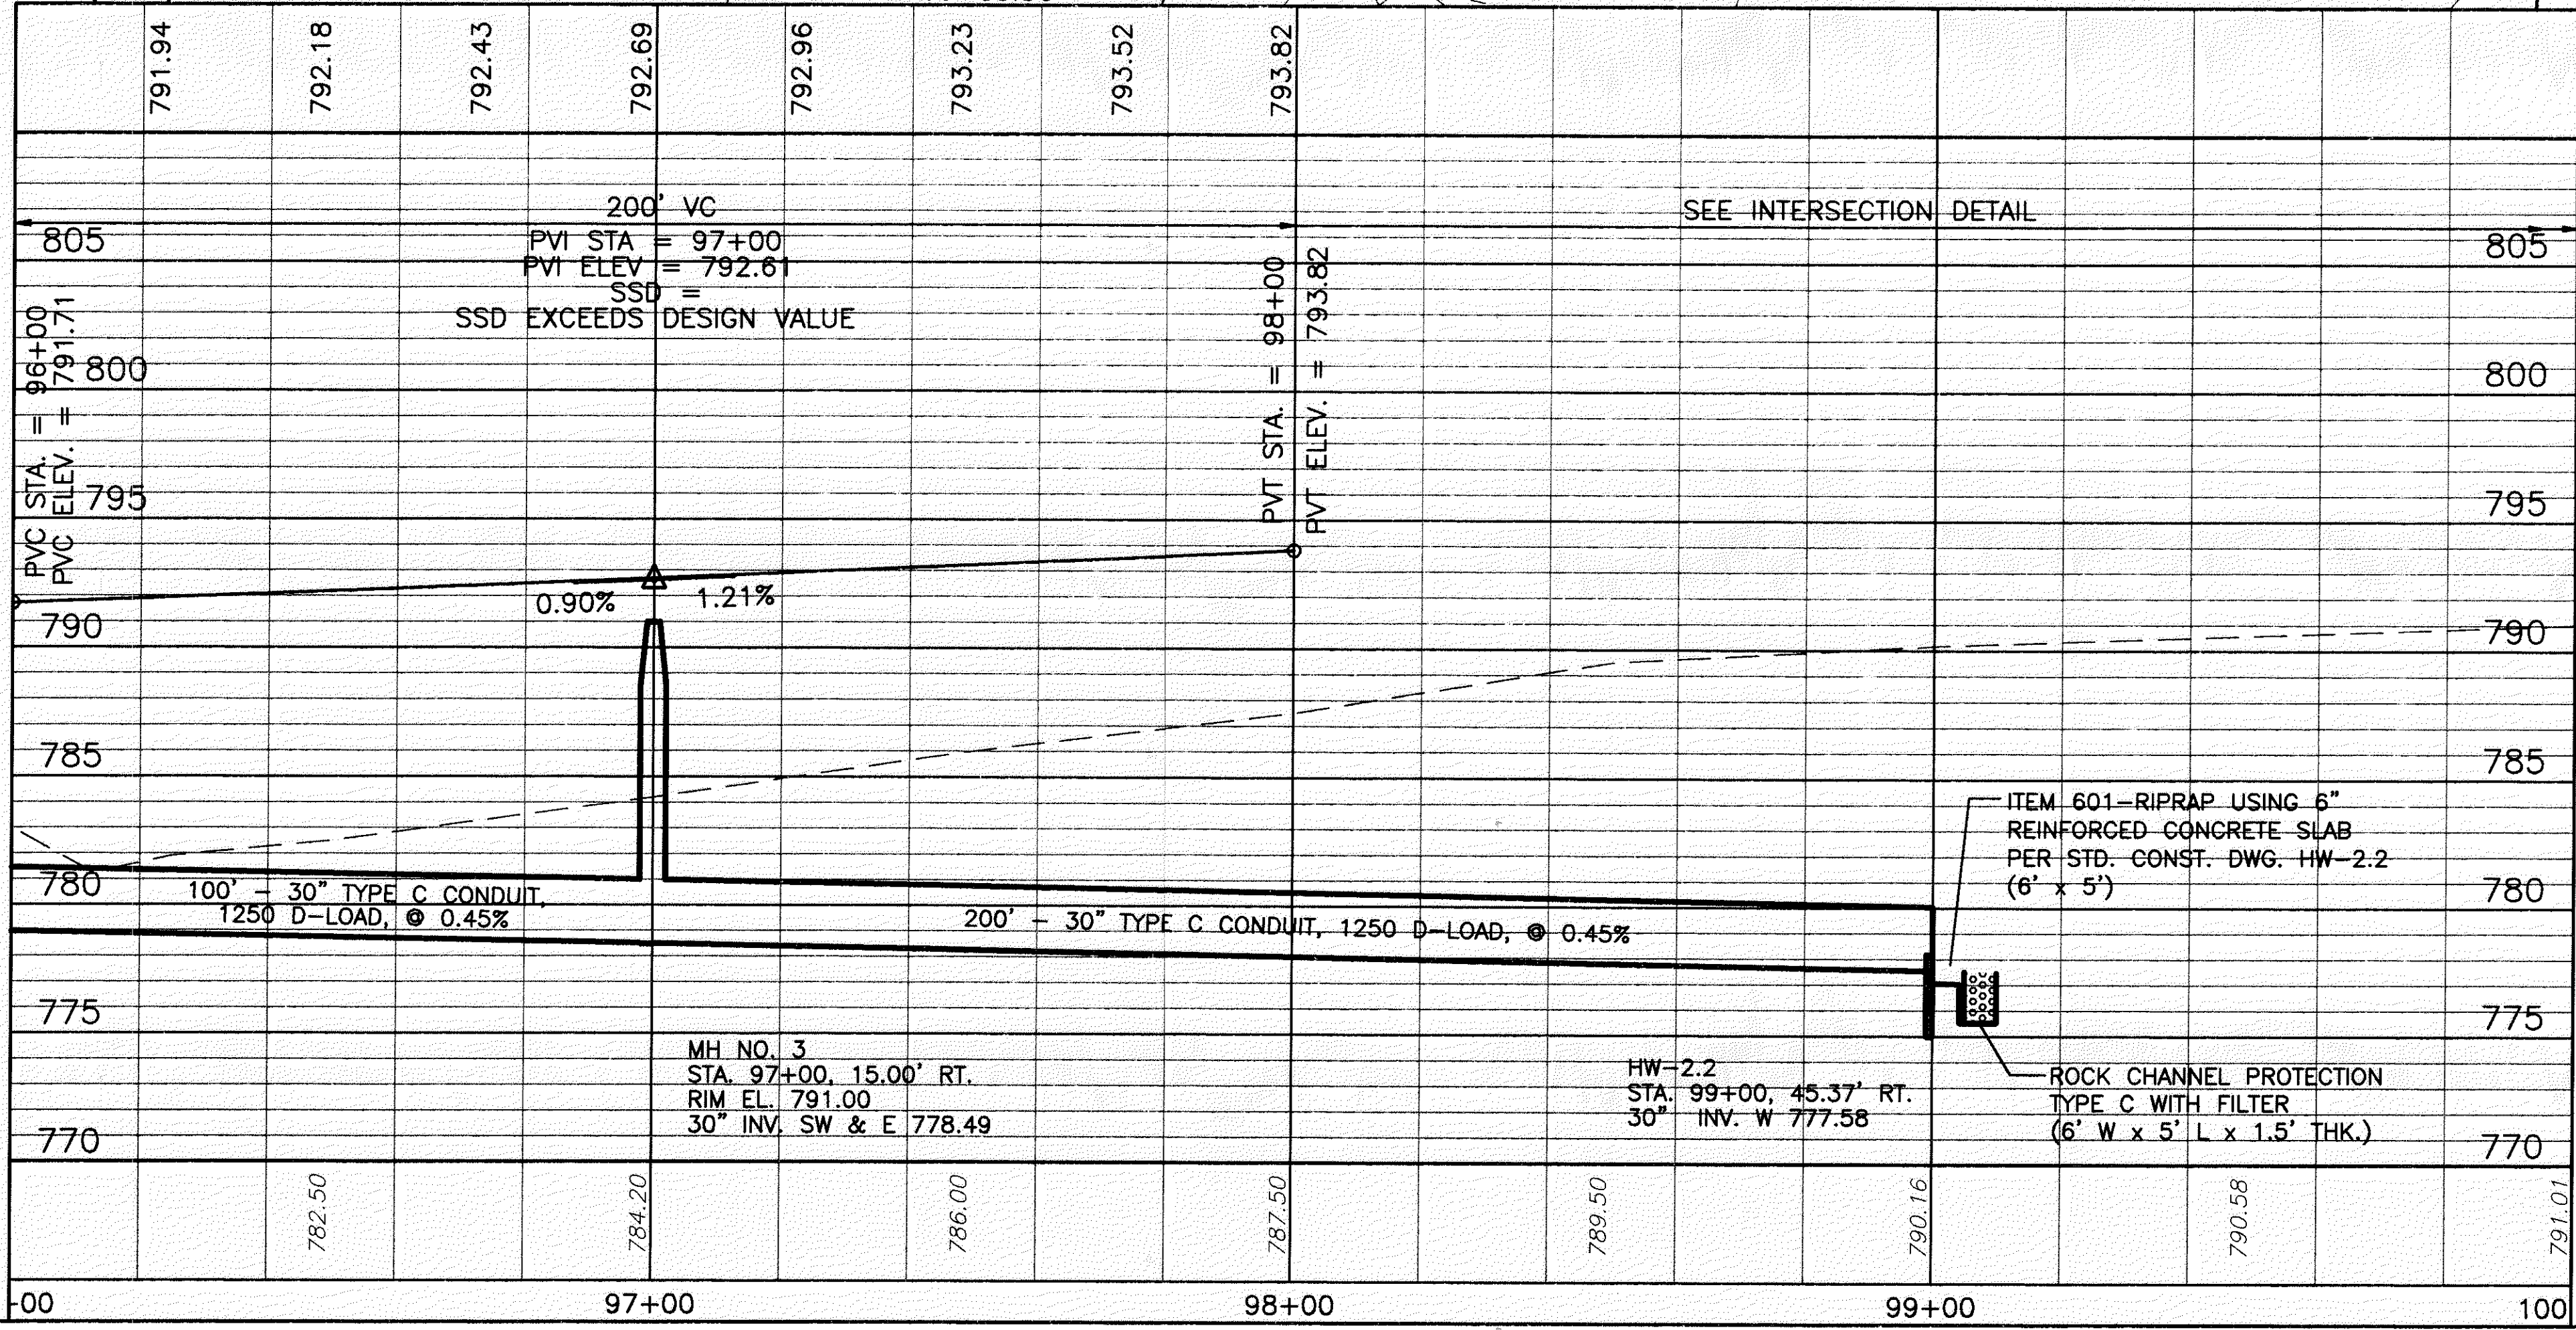

ITEM	DESCRIPTION	QUANTITY	UNIT	TOTAL
202	GUARDRAIL REMOVED		LIN.FT.	
604	MANHOLE NO. 3, AS PER PLAN		EACH	1
603	30" CONDUIT, TYPE C, 1250 D-LOAD, AS PER PLAN	100	LIN.FT.	100
602	CONCRETE MASONRY	0.96	CU.YD.	0.96
601	ROCK CHANNEL PROTECTION, TYPE C WITH FILTER	1.7	SQ.YD.	1.7
601	RIPRAP 6" REINFORCED CONCRETE SLAB	3.33	SQ.YD.	3.33
TOTALS				1216

REF	LOCATION	QUANTITY	UNIT	TOTAL
D-1	STA. 96+00, 10' LT. TO STA. 97+00, 15' RT.			
D-2	STA. 97+00, 15' RT. TO STA. 99+00, 45.37' RT.			
R-1	STA. 95+80 TO STA. 107+96			
TOTALS				1216