


**EXIST. S.R.#91 RELOC.**  
**≠ CURVE DATA**  
 SPIRAL  
 Δ = 2° 37' 30"  
 P = 150'  
 LT = 100.01'  
 ST = 50.01'  
 LC = 149.99'  
 PK = 74.99'  
 P = 0.57'

**S.R. No 1**  
**≠ CURVE DATA**  
 Δ = 0° 45' 00"  
 R = 7639.44'  
 Δ = 59° 15' 47"  
 LT = 3836.37'  
 ST = 710.63'  
 E = 909.17'

| MONUMENTS    |               |      |                            |  |   |
|--------------|---------------|------|----------------------------|--|---|
| Ref. No      | Station       | Loc. | ITEM I-8                   | ITEM E-8   | ITEM I-21                                   |
|              |               |      | STANDARD MONUMENT ASSEMBLY | REMOVAL AND DISPOSAL OF CONCRETE MEDIAN PAVEMENT | 4" PORTLAND CEMENT CONCRETE MEDIAN PAVEMENT |
|              |               |      | EACH                       | SQ. YD.  | SQ. YD.                                     |
| I-M          | PT. 109+67.21 | R/W  | 1                          | 1  | 1   |
| <b>TOTAL</b> |               |      | <b>1</b>                   | <b>1</b>   | <b>1</b>                                    |

FOR R/W ≠ CURVE DATA, SEE SHEET No 142

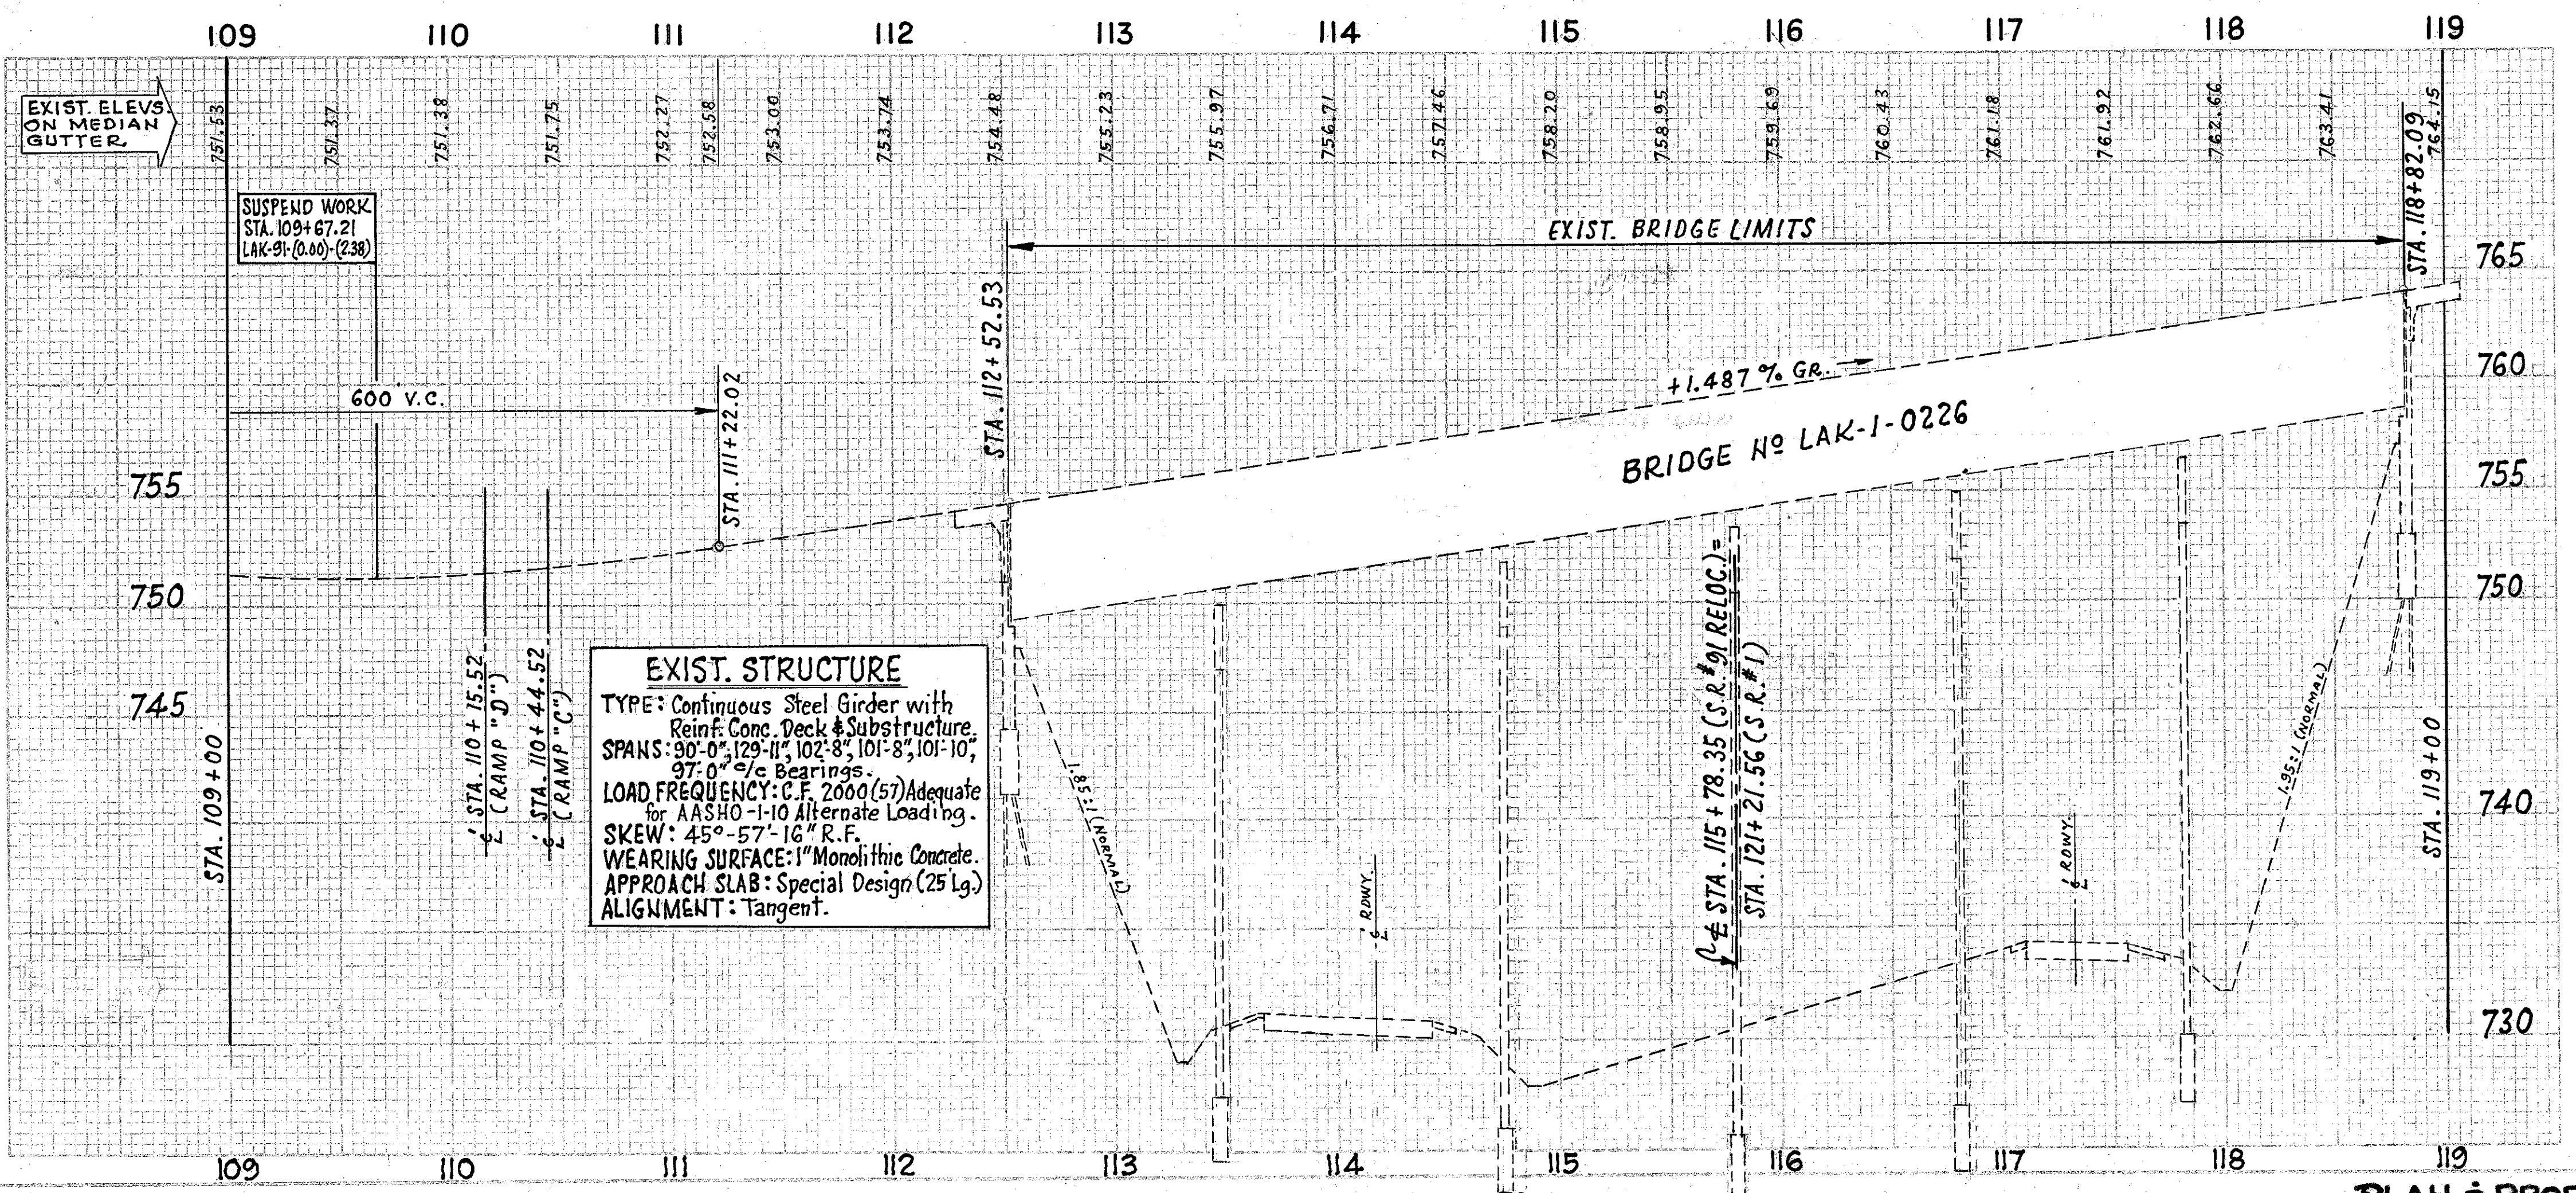

**EXIST. STRUCTURE**  
 TYPE: Continuous Steel Girder with Reinf. Conc. Deck & Substructure.  
 SPANS: 90'-0", 129'-11", 102'-8", 101'-8", 101'-10", 97'-0" / c Bearings.  
 LOAD FREQUENCY: C.F. 2000(57) Adequate for AASHO-I-10 Alternate Loading.  
 SKEW: 45° 57' 16" R.F.  
 WEARING SURFACE: 1" Monolithic Concrete.  
 APPROACH SLAB: Special Design (25 Lg.)  
 ALIGNMENT: Tangent.