

35 30 25 20 15 10 5 0 5 10 15 20 25 30


End Area  
Cut Fill

Cu.Yds.  
Cut Fill

30 25 20 15 10 5 0 5 10 15 20 25

FED.AID PROJECT STATE OHIO DIST.NO YEAR 12 24


S.H. No 604 Sec Willowick, A, Willoughby COUNTY LAKE

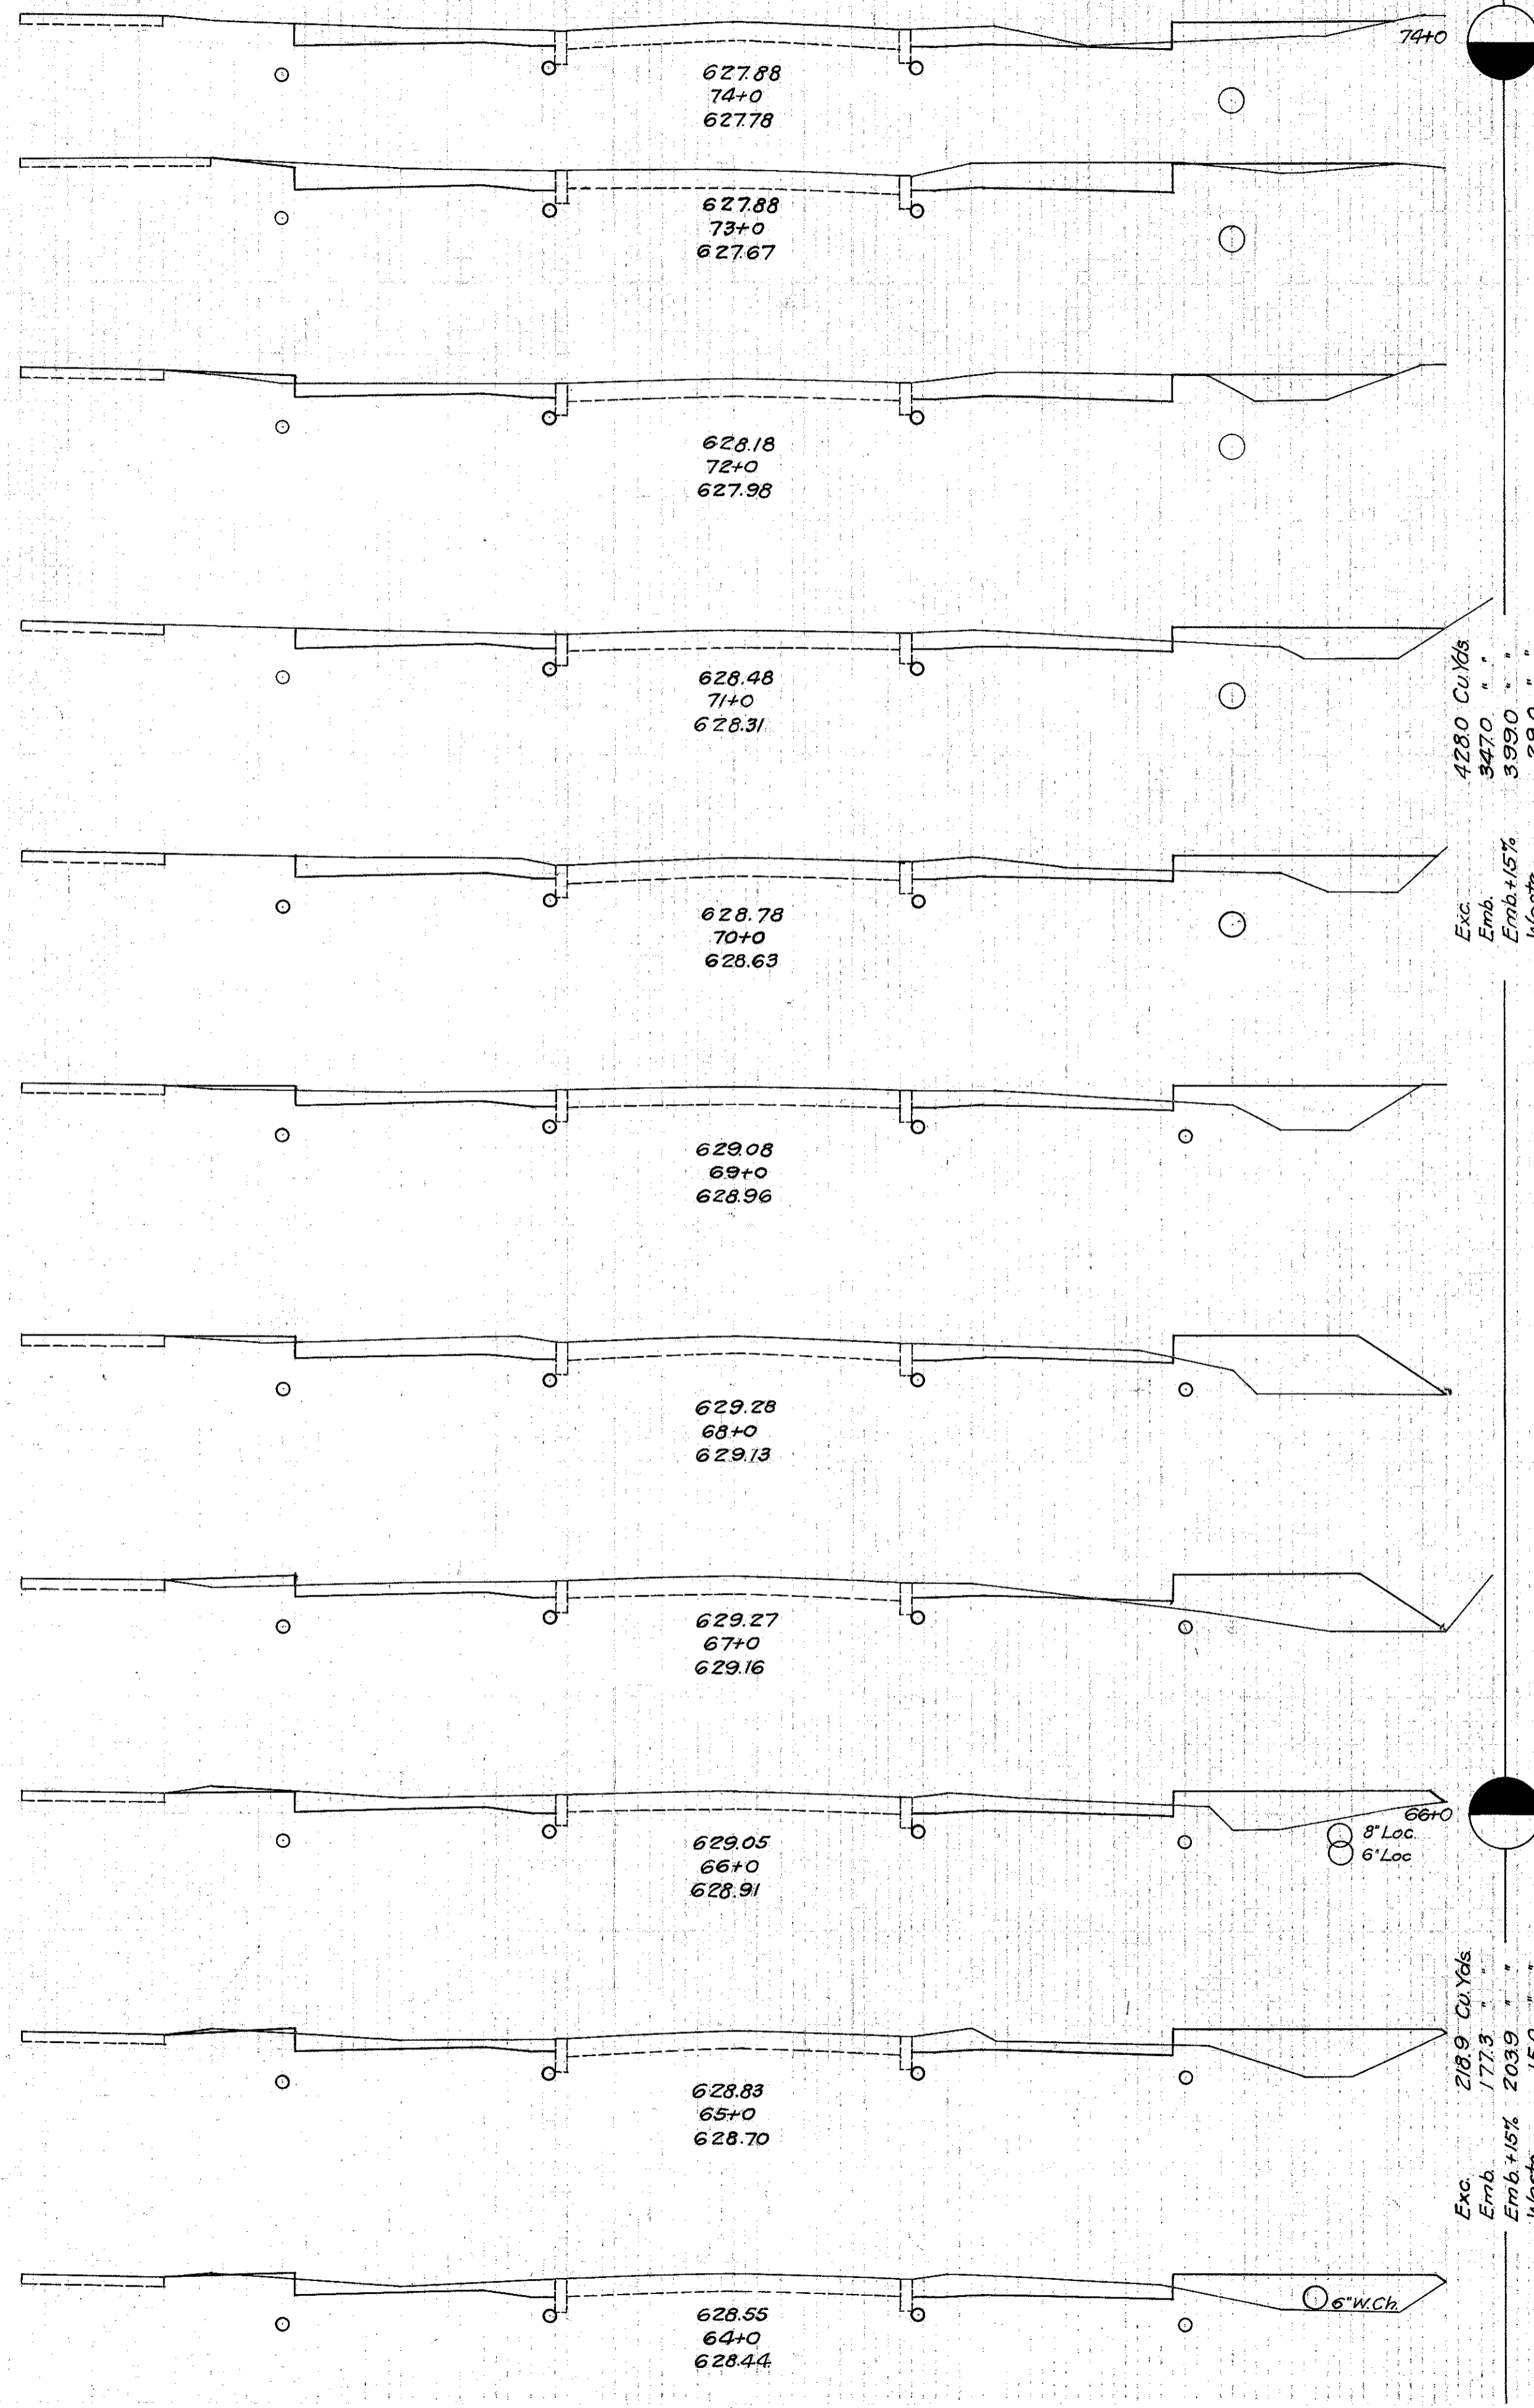

4280 Cu.Yds  
Exc. 9470  
Emb. 3990  
Waste 290

Exc. 2189 Cu.Yds  
Emb. 1773  
Emb.+5% 2039  
Waste 150

Station	End Area Cut	End Area Fill	Cu.Yds. Cut	Cu.Yds. Fill
74+0	14.0	5.0	66.9	12.4
73+0	22.1	1.7	72.0	12.6
72+0	16.8	5.1	55.9	28.5
71+0	13.4	10.3	52.4	38.3
70+0	14.9	10.4	50.2	45.6
69+0	12.2	14.2	48.9	64.8
68+0	14.2	20.8	41.1	80.0
67+0	8.0	22.4	40.6	64.8
66+0	13.9	12.6	46.1	50.9
65+0	11.0	14.9	45.6	56.3
64+0	13.6	15.5	63.3	40.7
Total	20.6	6.5		

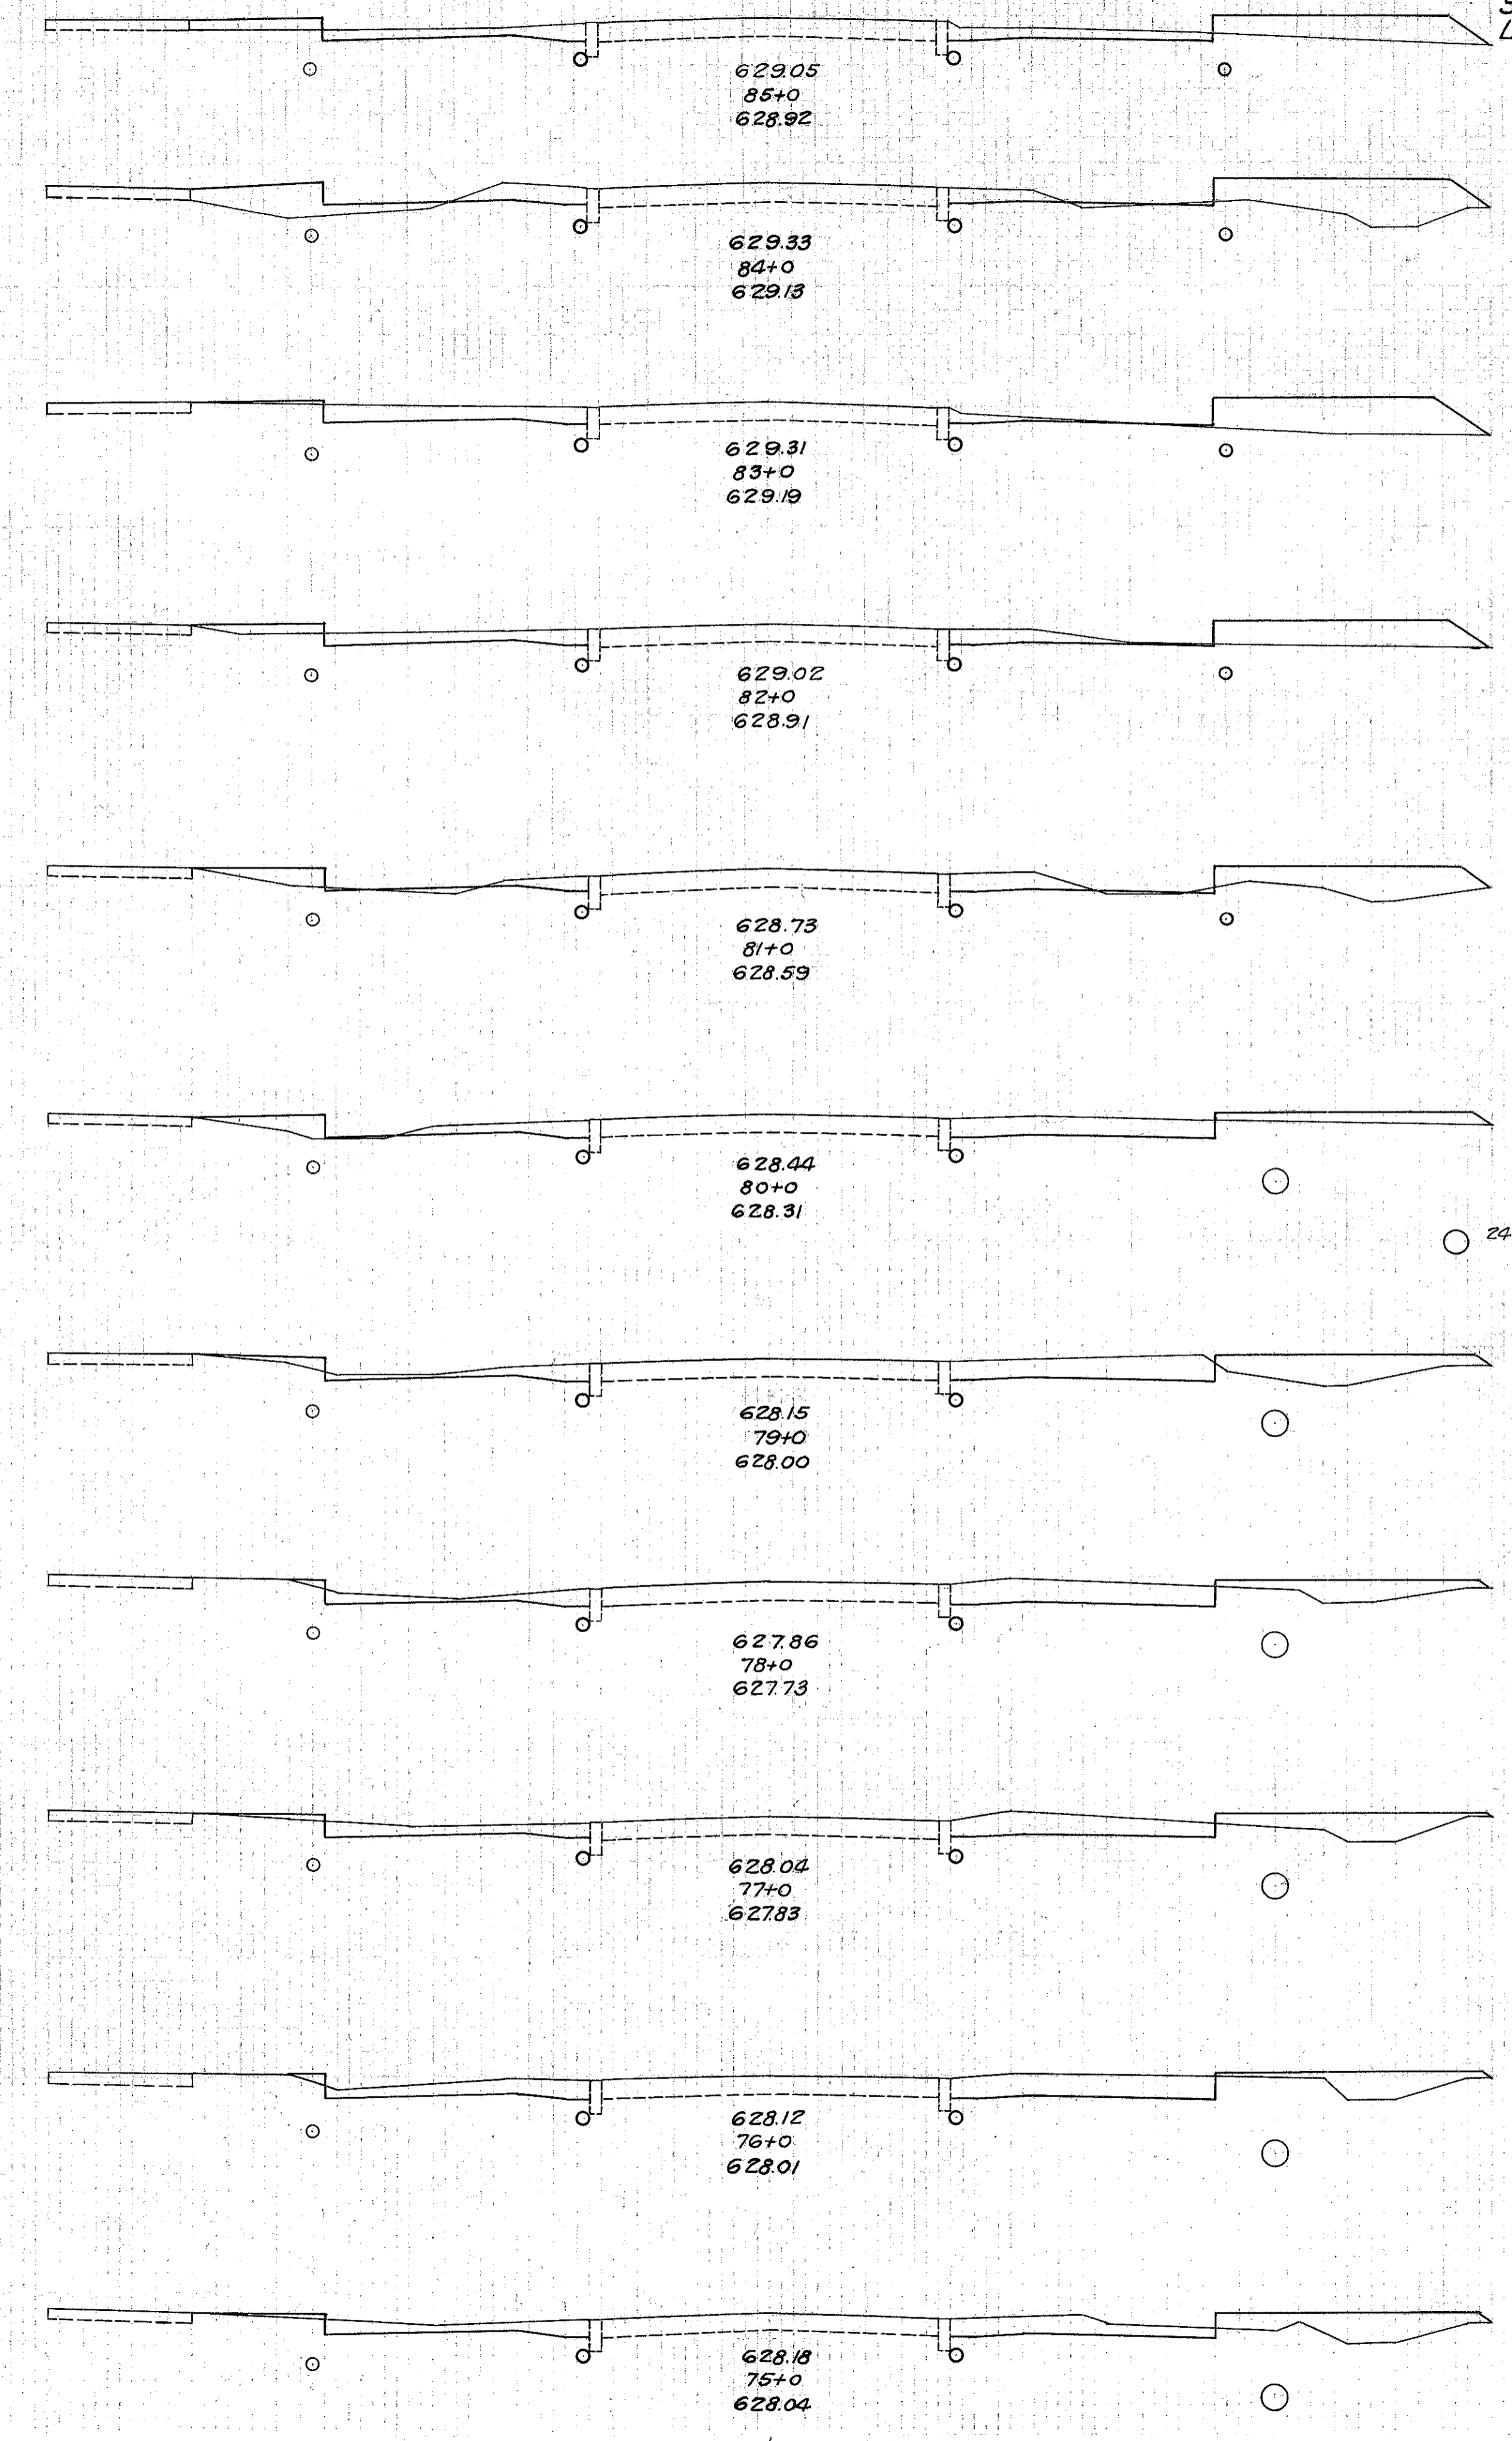

Exc. 4033 Cu.Yds  
Emb. 3478  
Emb.+5% 4000  
Waste 33

Station	End Area Cut	End Area Fill	Cu.Yds. Cut	Cu.Yds. Fill
85+0	10.5	11.6	29.8	62.6
84+0	5.6	22.2	20.0	51.5
83+0	8.8	14.9	26.7	68.7
82+0	9.9	13.0	6.7	17.2
81+0	5.9	14.3	34.6	51.7
80+0	9.9	13.0	29.3	50.6
79+0	5.9	14.3	34.4	40.2
78+0	12.7	7.4	47.6	34.1
77+0	13.0	11.0	48.9	33.0
76+0	13.4	6.8	49.6	29.4
75+0	13.4	9.1	54.1	29.4
74+0	15.8	6.8	60.7	32.8
73+0	11.6	10.9	47.4	29.4
Total	14.0	5.0		

⊕

⊕