


FOR TYPICAL SECTIONS SEE SHEET 3-7  
 \* AREA BY COMPUTER CALCULATION

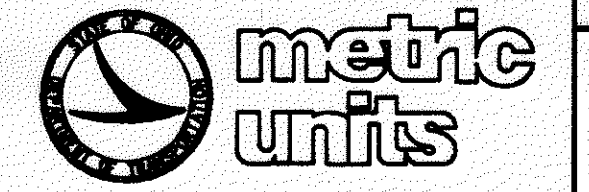

CALCULATED  
 W.D.B.  
 CHECKED  
 P.S.L.

PAVEMENT

STREET NAME	STATION TO STATION	RESURFACING LENGTH (METER)	RESURFACING AREA		CONCRETE BASE LENGTH		CONCRETE BASE AREA		203	254	301	301	304	305	407	407	408	448	448	252			
			AVE. WIDTH (METER)	P'MT AREA SQ. M.	LT. & RT. (METER)	AVE. WIDTH (METER)	P'MT AREA SQ. M.	SQ. M.	SQ. M.	CU. M.	CU. M.	CU. M.	SQ. M.	LITERS	LITERS	LITERS	CU. M.	CU. M.	METERS				
			SUBGRADE COMPACTION		PAVEMENT PLANING, BITUMINOUS (32mm)		118mm BITUMINOUS AGGREGATE BASE, PG64-22		220mm BITUMINOUS AGGREGATE BASE, PG64-22		150mm AGGREGATE BASE, AS PER PLAN		230mm CONCRETE BASE		TACK COAT @ 0.45 LITERS PER SQ. M.		TACK COAT FOR INTERMEDIATE COURSE @ 0.23 LITERS PER SQ. M.		BITUMINOUS PRIME COAT 1.80 LITERS PER SQ. M.		32mm ASPHALT CONCRETE SURFACE COURSE, TYPE 1, PG64-22		45mm ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 2, PG64-22
S.R. 640	2+827.154 TO 2+840.000	-	-	-	12.846	20.300	260.77	260.77	-	-	-	-	39.12	260.77	115.61	59.09	-	8.22	11.56	-			
	2+840.000 TO 2+890.000	-	-	-	50.000	19.300	915.00	965.00	-	-	-	-	144.75	965.00	427.50	218.50	-	30.40	42.75	-			
	2+890.000 TO 3+520.000	-	-	-	630.000	18.300	11529.00	11529.00	-	-	-	-	1729.35	11529.00	5103.00	2608.20	-	362.88	510.30	-			
	3+520.000 TO 3+539.400	-	-	-	19.400	17.850	346.29	346.29	-	-	-	-	51.94	346.29	153.21	78.31	-	10.90	15.32	-			
E. 354th ST.	1+009.000 TO 1+030.000	-	-	-	21.000	-	193.81*	193.81	-	-	-	-	29.07	193.81	83.69	42.77	-	5.95	8.37	-			
	1+030.000 TO 1+035.000	5.000	7.080	35.40	-	-	-	-	28.50	0.71	-	-	0.90	-	15.93	-	10.80	1.13	-	17.20			
E. 355th ST.	0+096.000 TO 0+970.000	10.000	6.800	68.00	-	-	-	-	52.00	1.88	-	-	2.40	-	30.60	-	28.80	2.18	-	27.20			
	0+970.000 TO 0+991.000	-	-	-	21.000	-	193.81*	193.81	-	-	-	-	29.07	193.81	83.69	42.77	-	5.95	8.37	-			
E. 357th ST. N.	1+009.000 TO 1+030.000	-	-	-	21.000	-	193.81*	193.81	-	-	-	-	29.07	193.81	83.69	42.77	-	5.95	8.37	-			
	1+030.000 TO 1+040.000	10.000	6.800	68.00	-	-	-	-	52.00	1.88	-	-	2.40	-	30.60	-	28.80	2.18	-	27.20			
E. 357th ST. S.	1+970.000 TO 0+991.000	-	-	-	21.000	-	234.54*	234.54	-	-	-	-	35.18	234.54	102.02	52.14	-	7.25	10.20	9.14			
E. 359th ST. N.	1+009.000 TO 1+050.000	-	-	-	41.000	-	343.80*	343.80	-	-	-	-	51.57	343.80	148.48	75.89	-	10.56	14.85	-			
	1+050.000 TO 1+065.000	15.000	6.205	93.08	-	-	-	-	60.15	3.89	-	-	4.94	-	41.89	-	59.27	2.98	-	37.20			
E. 359th ST. S.	0+950.000 TO 0+960.000	10.000	6.600	66.00	-	-	-	-	48.00	2.14	-	-	2.70	-	29.70	-	32.40	2.11	-	27.20			
	0+960.000 TO 0+991.000	-	-	-	31.000	-	268.80*	268.80	-	-	-	-	40.32	268.80	116.08	59.33	-	8.26	11.61	-			
E. 360th ST.	1+009.000 TO 1+050.000	-	-	-	41.000	-	343.80*	343.80	-	-	-	-	51.57	343.80	148.48	75.89	-	10.56	14.85	-			
	1+050.000 TO 1+062.000	12.000	6.325	75.90	-	-	-	-	50.70	2.97	-	-	4.44	-	34.15	-	45.36	2.43	-	31.20			
E. 361st ST.	0+970.000 TO 0+991.000	-	-	-	21.000	-	324.15*	324.15	-	-	-	-	48.62	324.15	142.03	72.59	-	10.10	14.20	11.56			
E. 362nd ST.	1+009.000 TO 1+050.000	-	-	-	41.000	-	343.80*	343.80	-	-	-	-	51.57	343.80	148.48	75.89	-	10.56	14.85	-			
	1+050.000 TO 1+065.000	15.000	6.25	93.75	-	-	-	-	61.50	3.81	-	-	4.84	-	42.18	-	58.05	3.00	-	37.20			
E. 363rd ST.	0+965.000 TO 0+970.000	5.000	6.80	34.00	-	-	-	-	26.00	0.94	-	-	1.20	-	15.30	-	14.40	1.09	-	17.20			
	0+970.000 TO 0+991.000	-	-	-	21.000	-	193.81*	193.81	-	-	-	-	29.07	193.81	83.69	42.77	-	5.95	8.37	-			
E. 364th ST.	1+009.000 TO 1+040.000	-	-	-	31.000	-	268.80*	268.80	-	-	-	-	40.32	268.80	116.08	59.33	-	8.26	11.61	-			
	1+040.000 TO 1+045.000	5.000	6.900	34.50	-	-	-	-	27.00	4.07	-	-	5.18	-	15.53	-	62.10	1.10	-	17.20			
									16,004	406	23	-	2430	16,004	7312	3607	340	520	706	260			

QUANTITIES CARRIED TO GENERAL SUMMARY

PAVEMENT SUB-SUMMARY

LAK-640-2.865 (1.78)