


- NOTES:
- BARRELS SHALL BE SPACED OUT ALONG ROADWAY AT 15m ON CENTER EXCEPT FOR TAPERS AND CLOSED INTERSECTIONS, WHERE THE BARRELS SHALL BE SPACED AT 3m ON CENTER. BARRELS SHALL NOT PROHIBIT ACCESS TO ANY INTERSECTION OR DRIVEWAY NOT UNDER CONSTRUCTION
 - EXISTING CONFLICTING SIGNS, SIGNALS AND PAVEMENT MARKING ON VINE STREET SHALL BE COVERED (SIGNS AND SIGNALS) OR REMOVED (PAVEMENT MARKINGS)
 - ALL INTERSECTIONS THAT ARE CLOSED DUE TO CONSTRUCTION SHALL HAVE EMERGENCY ACCESS MAINTAINED
 - PORTABLE CONCRETE BARRIERS ARE TO HAVE AN OPENING FOR EACH DRIVEWAY ALONG THE NORTH SIDE OF VINE STREET. THE WIDTH OF EACH OPENING SHALL MEASURE FROM 2 METERS WEST OF THE EDGE OF DRIVE TO 2 METERS EAST OF THE EDGE OF DRIVE.
 - CONTRACTOR TO SUPPLY A POLICEMAN DURING PEAK HOURS AT THE ERIE STREET INTERSECTION

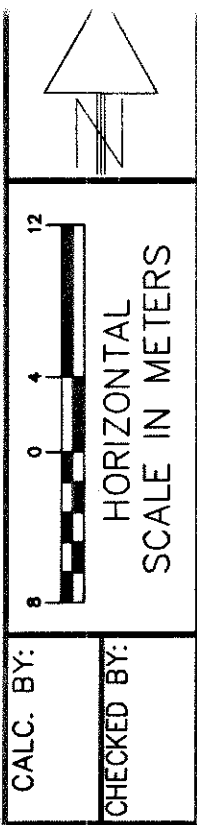

MAINTENANCE OF TRAFFIC
SECTION 3 - PHASE 1

LAK-640-3.444