

MICROFILMED
APR 20 1984

COMPUTED BY: D.A.S. 4/81
CHECKED BY: G.S. 5/81



FHWA REGION	STATE	PROJECT
5	OHIO	

15
27

LAKE COUNTY
LAK - 84 - 14.48

NOTE: ADD 700 TO ALL ELEVATIONS

- PAVEMENT REMOVED
- WEARING COURSE REMOVED

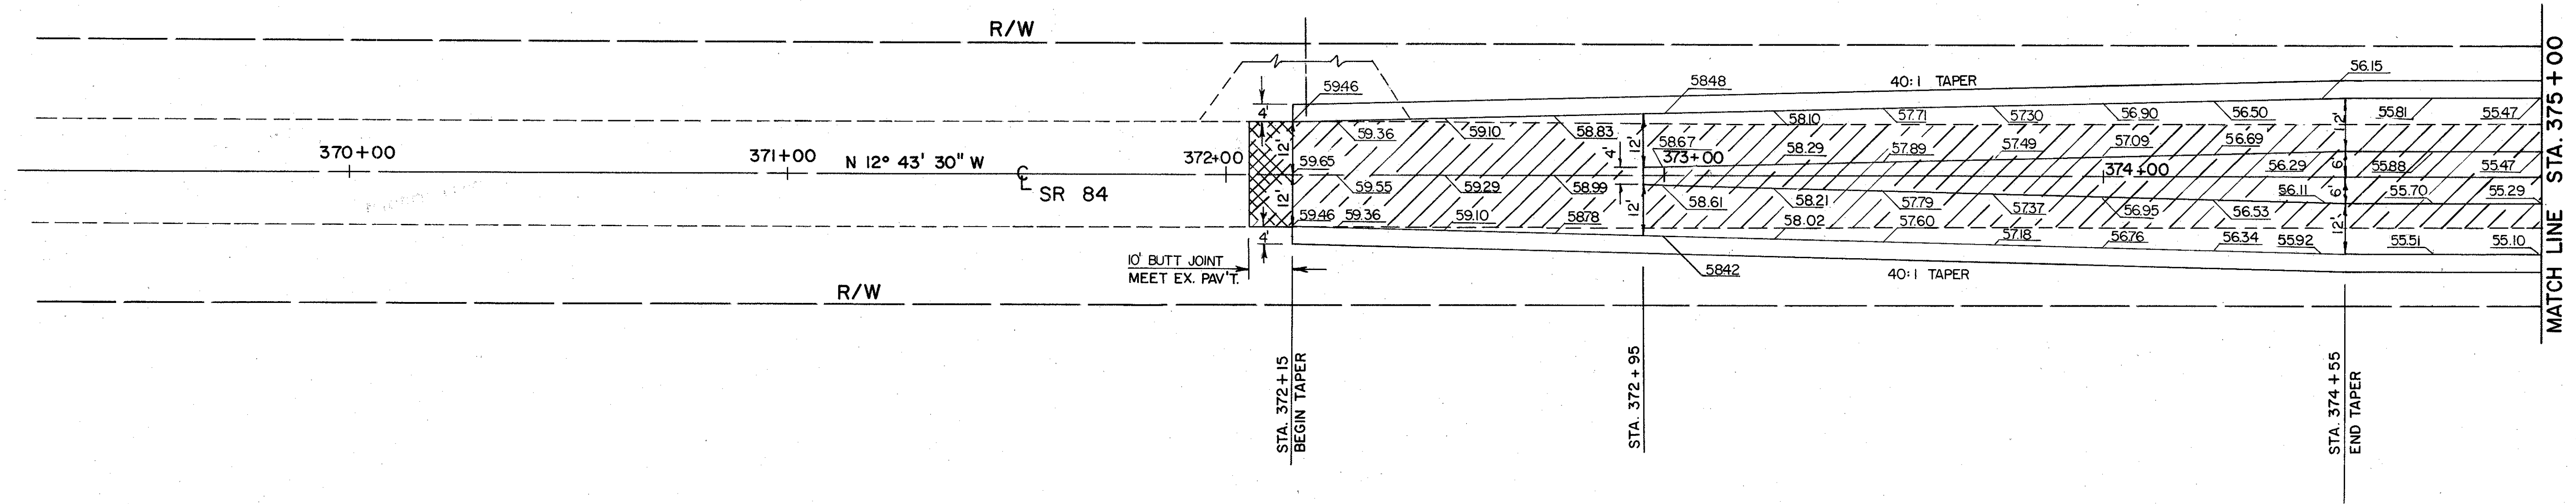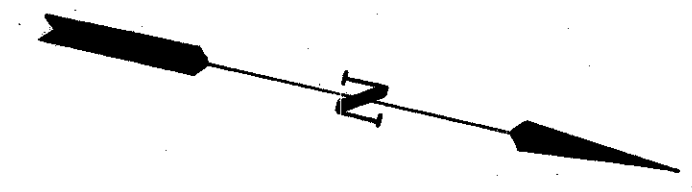

STATIONS		PAVEMENT QUANTITIES										
		202	202	301	402	404	407	407	409	310	305	203
FROM	TO	PAVEMENT REMOVED	WEARING COURSE REMOVED	BITUMINOUS AGGREGATE BASE	ASPHALT CONCRETE 1 3/4	ASPHALT CONCRETE 1 1/4	TACK COAT .1 GAL./S.Y.	COVER AGGREGATE 7 LB./S.Y. (703.06)	SEAL COAT BITUMINOUS MATERIAL .3 GAL./S.Y.	SUBBASE TYPE II	9" PORTLAND CEMENT CONCRETE BASE	SUBGRADE COMPACTION
		S.Y.	S.Y.	C.Y.	C.Y.	C.Y.	GAL	TON	GAL	C.Y.	S.Y.	S.Y.
SR 84:												
372+05	381+58.47	2511	54	107	166	120	347	12	199	784	3466	4086
RELOC. JOHNNYCAKE:												
94+70	98+31.27		27	278	68	49				157		1635
KNOLLWOOD DR.:												
0+18	0+98		20	46	10	8				28		267
OLD JOHNNYCAKE:												
96+24.82	100+00	879										
CONNECTOR RD.:												
0+00	2+82.29	542										
TOTALS		3932	101	431	244	177	347	12	199	969	3466	5988