


TYPICAL SECTION

TYPE T-71

FED. RD. DIVISION	STATE	PROJECT
2	OHIO	I-1103(15)

2
176

LAKE COUNTY
LAK-1-26.51
ASHTABULA COUNTY
ATB-1-0.00

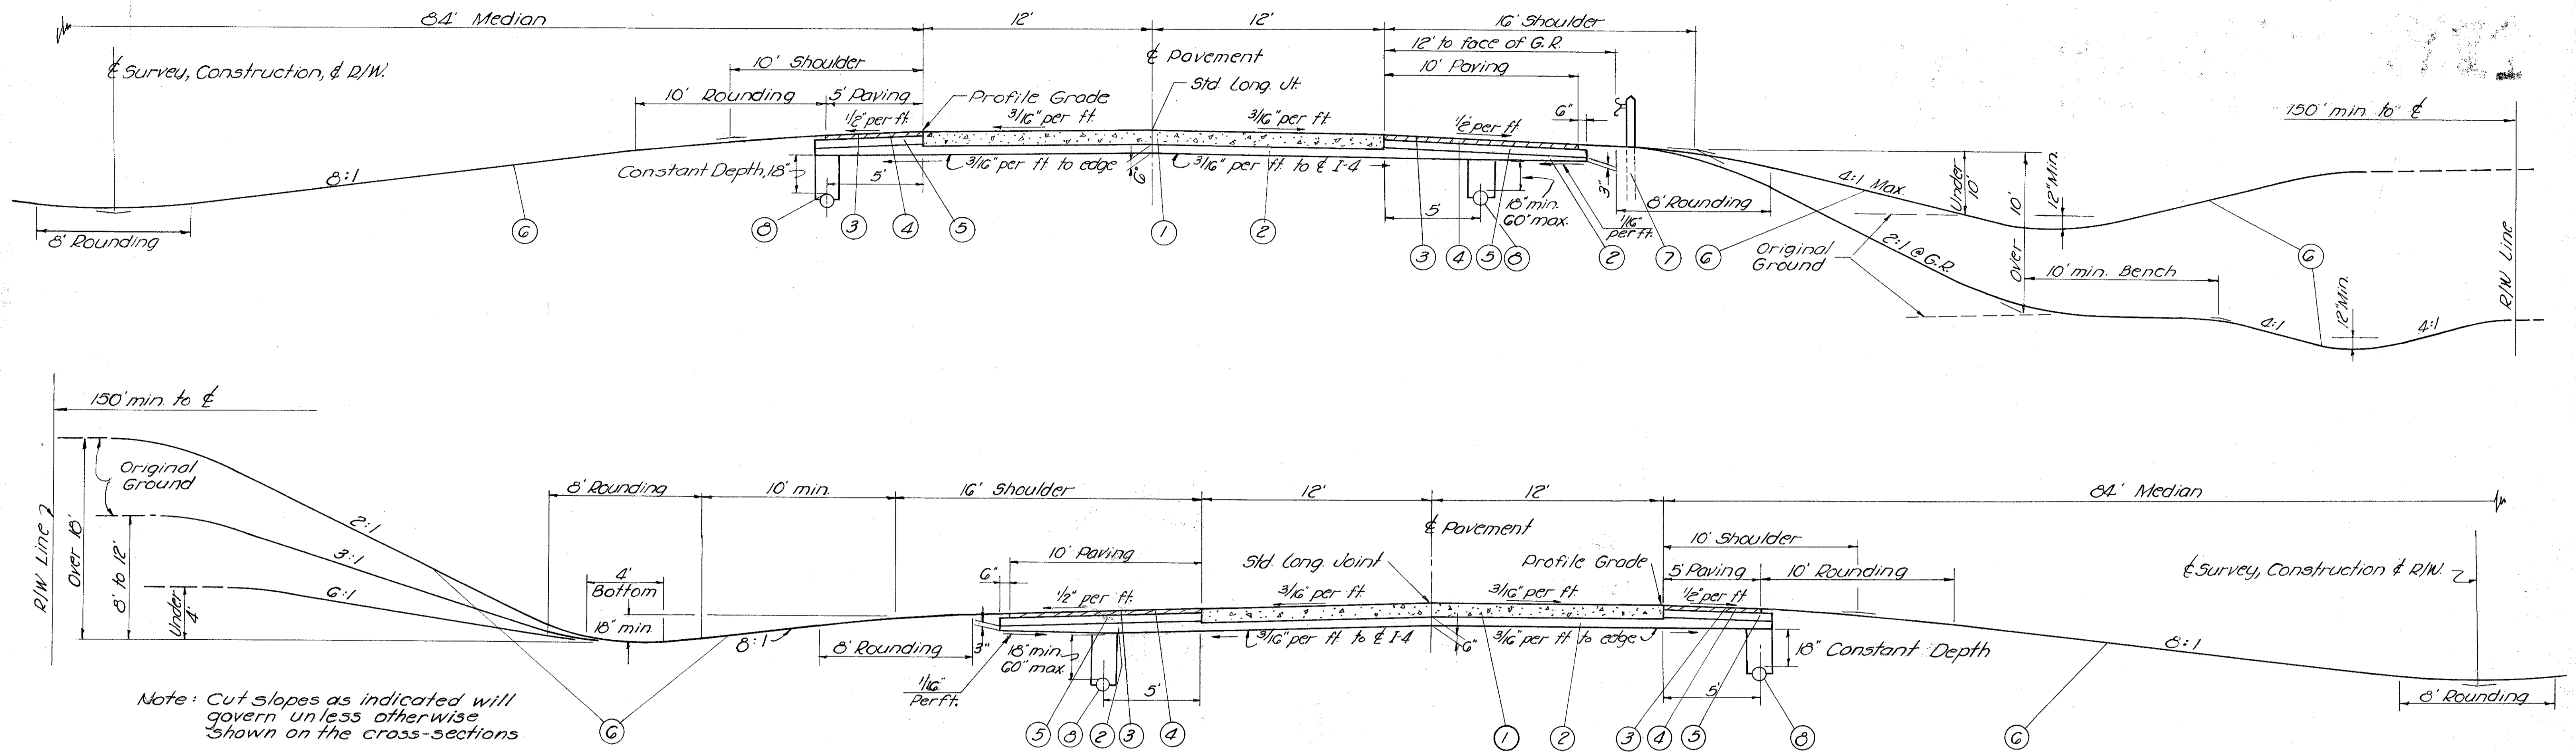

Sta. 19+00.00 to Sta. 119+07.39 (LAKE CO.) = 10007.39 Lin. Ft.
 Sta. 0+44.61 to Sta. 132+00.00 (ASHTABULA CO.) = 13155.39 Lin. Ft.
 23162.78 Lin. Ft.

Station Equation: 119+07.39 LAKE CO. back
 = 0+44.61 ASHTABULA CO. ahead

- ① Item T-71, 10" Reinforced Portland Cement Concrete Pavement
- ② Item I-22, 6" Subbase (or as shown) Grading "A" or "B" as per Plan
- ③ Item T-31, Bituminous Surface Treatment (See Proposal Note)
- ④ Item B-33 3" Bituminous Macadam Base Course
- ⑤ Item I-18, 5" Stabilized Crushed Aggregate Shoulder Material
- ⑥ Item L-9, Seeding & Protecting
- ⑦ Item I-15, Guard Rail Steel Beam Type, (Deep)
- ⑧ Item I-4, 6" Underdrain