
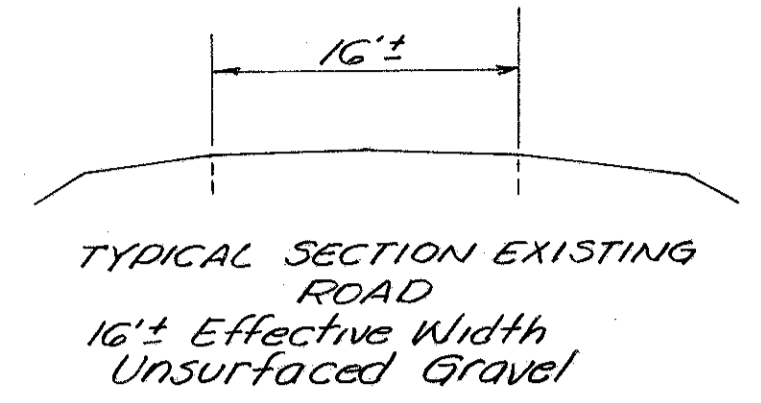


I-1103(15)
LAKE COUNTY
LAK - 1-26.51
ASHTABULA COUNTY
ATB-1-0.00

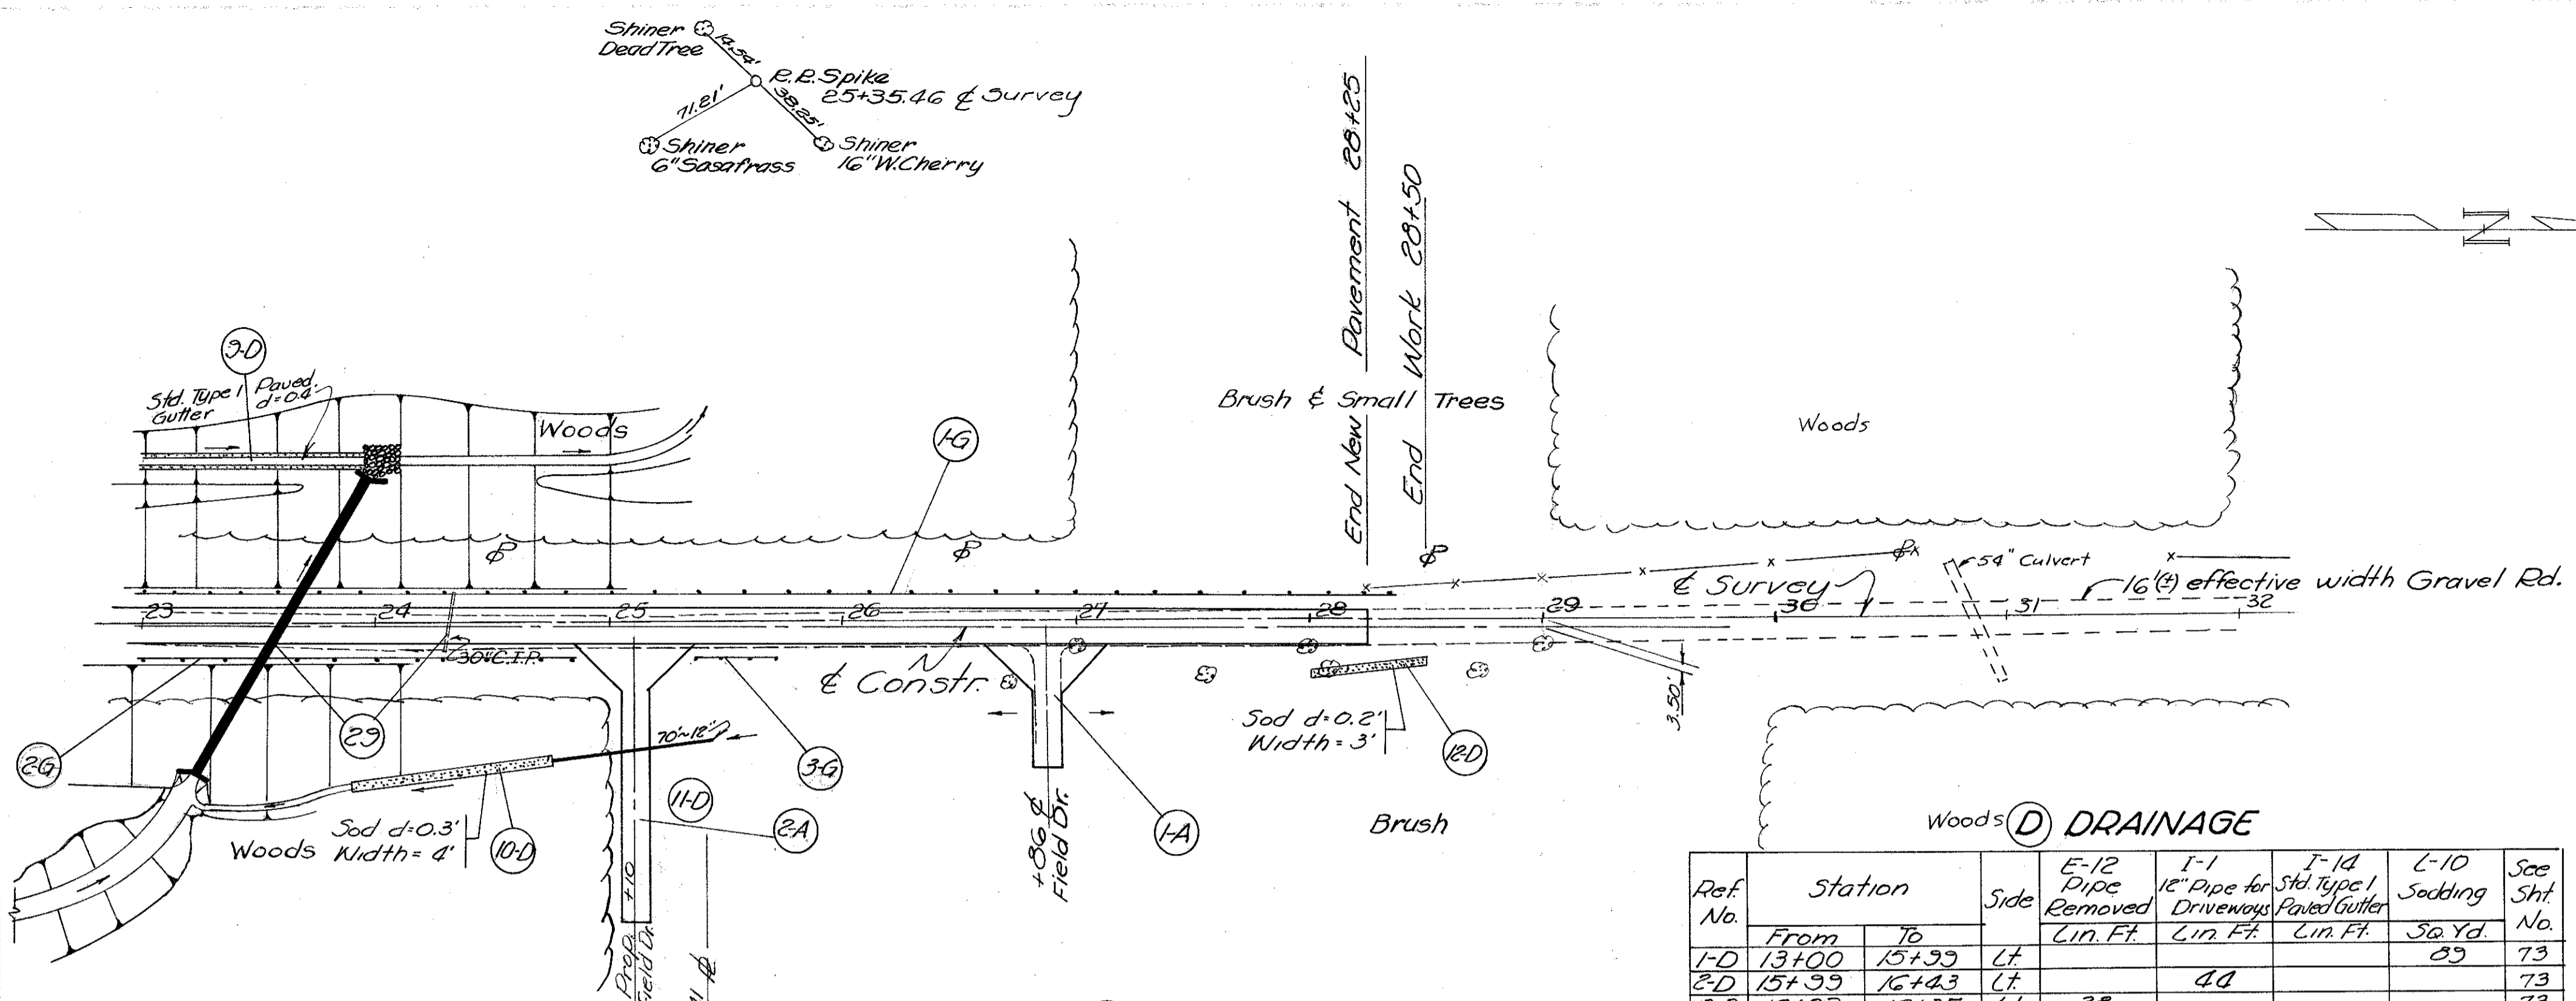

ESTIMATED QUANTITIES

Item	Description	Unit	Quantity
F-32	No. 16 Aggregate for Road Mix	Cu. Yd.	123.1
F-32	Bituminous Material for Road Mix	Gal.	2009.7
F-32	No. 6 or 9 Aggregate for Choke	Cu. Yd.	8.9
F-32	No. 6 Aggregate for Seal Coat	Cu. Yd.	17.9
F-32	Bituminous Material for Seal Coat	Gal.	358.3
F-32	Bituminous Prime Coat	Gal.	781.6
B-119	5" Crushed Aggregate Base Course	Cu. Yd.	328.7
I-22	4" Subbase	Cu. Yd.	303.2
E-101	Compacted Subgrade	Sq. Yd.	238.5
I-7	Reinforced Concrete Approach Slabs	Sq. Yd.	152

WOODS DRAINAGE

Ref. No.	Station		Side	E-12 Pipe Removed Lin. Ft.	I-1 12" Pipe for Driveway Lin. Ft.	I-14 Std. Type 1 Paved Gutter Lin. Ft.	L-10 Soding Sq. Yd.	See Sht. No.
	From	To						
1-D	13+00	15+99	Lt.		44		29	73
2-D	15+99	16+43	Lt.					73
3-D	16+07	16+35	Lt.	28				73
4-D	16+43	18+48	Lt.				91	73
5-D	13+00	13+85	Rt.				47	73
6-D	13+91	14+21	Rt.	30				73
7-D	14+35	15+00	Rt.				258	73
8-D	21+13	23+00	Lt.				166	73
9-D	23+00	23+95	Lt.			35	32	74
10-D	23+90	24+75	Rt.				38	74
11-D	24+75	25+45	Rt.		70			74
12-D	23+00	23+50	Rt.				17	74
Totals				58	114	35	738	

(A) DRIVES

Ref. No.	Station	Side	Type	Width	B-119	
1-A	26+86	Rt.	Field	12	19.0	
2-A	25+10	Rt.	Field	12	34.1	
Total					53.1	

(G) GUARD RAIL, I-15

Ref. No.	Station		Side	Wire Cable Lin. Ft.
	From	To		
1-G	23+00	28+352	Lt.	535.2
2-G	23+00	24+844	Rt.	184.4
3-G	25+38	25+60	Rt.	32
Total				751.6

STRUCTURES 20' SPAN & UNDER

Str. No.	Station	Proposed		Details on Sheet
		Type	Size	
23	23+60	Pipe	48" 152'	103

